


PHILLIPPI CREEK MAINTENANCE DREDGING PROJECT

SARASOTA COUNTY, FLORIDA

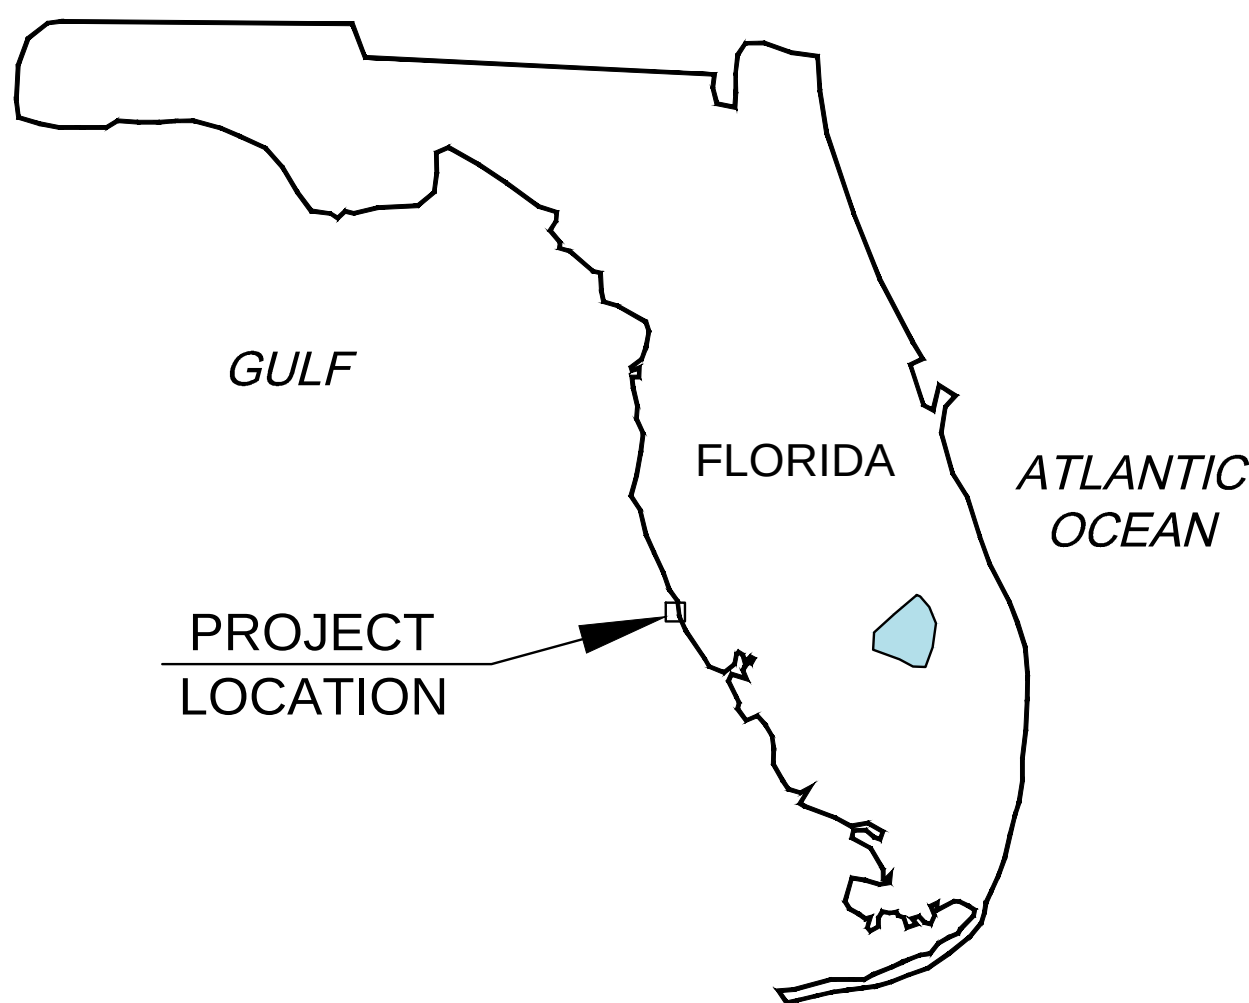

SHEET INDEX	SHEET INDEX	
	SHEET NUMBER	TITLE
		COVER SHEET
	CM-1.0	GENERAL NOTES
	CM-1.1	PROJECT PLAN VIEW
	CM-1.2	PROPOSED CHANNEL CUT DEPTHS AND MARINE RESOURCES PARTIAL PLANS (1 OF 2)
	CM1.3	PROPOSED CHANNEL CUT DEPTHS AND MARINE RESOURCES PARTIAL PLANS (2 OF 2)
	CM-2.0	EXISTING CONDITIONS / DREDGE PLAN (1 OF 3)
	CM-2.1	EXISTING CONDITIONS / DREDGE PLAN (2 OF 3)
	CM-2.2	EXISTING CONDITIONS / DREDGE PLAN (3 OF 3)
	CM-2.3	CROSS SECTIONS (1 OF 13)
	CM-2.4	CROSS SECTIONS (2 OF 13)
	CM-2.5	CROSS SECTIONS (3 OF 13)
	CM-2.6	CROSS SECTIONS (4 OF 13)
	CM-2.7	CROSS SECTIONS (5 OF 13)
	CM-2.8	CROSS SECTIONS (6 OF 13)
	CM-2.9	CROSS SECTIONS (7 OF 13)
	CM-2.10	CROSS SECTIONS (8 OF 13)
	CM-2.11	CROSS SECTIONS (9 OF 13)
	CM-2.12	CROSS SECTIONS (10 OF 13)
	CM-2.13	CROSS SECTIONS (11 OF 13)
	CM-2.14	CROSS SECTIONS (12 OF 13)
	CM-2.15	CROSS SECTIONS (13 OF 13)
	CM-2.16	TURBIDITY CURTAIN DETAIL
	CM-2.17	PERMITTED DMMA LOCATION
	CM-2.18	POTENTIAL COUNTY OWNED DMMA SITES
	CM-2.19	POTENTIAL PRIVATE OWNED DMMA SITES


OWNER:



ENGINEER:



PROJECT SPONSOR:

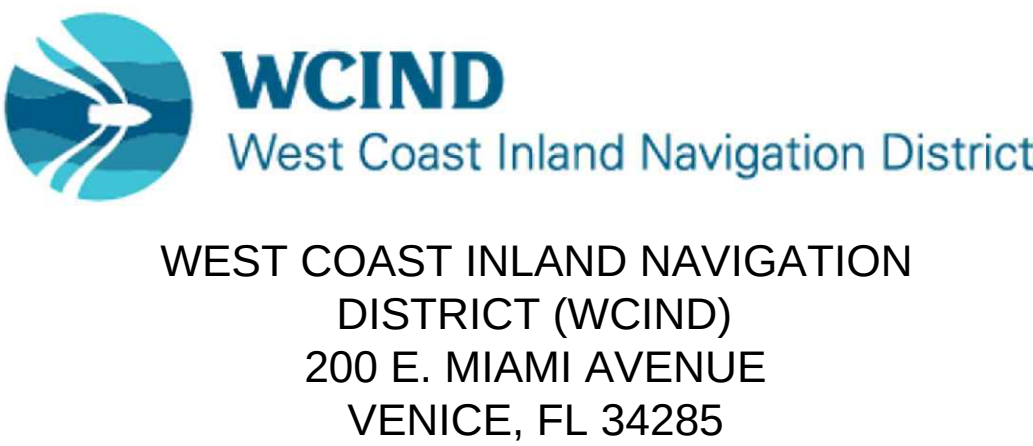

NOT FOR CONSTRUCTION
CONSTRUCTION DRAWINGS
FOR REGULATORY REVIEW ONLY
09/29/2025



1. THE WORK CONSISTS OF FURNISHING ALL CONSTRUCTION, LABOR, EQUIPMENT AND MATERIALS AND PERFORMING ALL OPERATIONS IN CONNECTION WITH DREDGING OF THE LOCATIONS SHOWN ON THESE DRAWINGS AND SPECIFIED IN THE CONTRACT DOCUMENTS, INCLUDING TECHNICAL SPECIFICATIONS.
2. NO CONSTRUCTION SHALL COMMENCE UNTIL ALL REQUIRED PERMITS AND APPROVALS HAVE BEEN SECURED AND THE CONTRACTOR HAS BEEN ISSUED NOTICE TO PROCEED.
3. ATTENTION IS DIRECTED TO THE FACT THAT THESE PLANS MAY HAVE CHANGED IN SIZE BY REPRODUCTION. THIS SHOULD BE CONSIDERED WHEN OBTAINING SCALED DATA. ALL DIMENSIONS ON PLANS ARE SUBJECT TO VERIFICATION IN THE FIELD. IT IS THE INTENT OF THESE PLANS TO BE IN ACCORDANCE WITH APPLICABLE CODES AND AUTHORITIES HAVING JURISDICTION. ANY DISCREPANCIES IN THE PLANS WITH FIELD CONDITIONS SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ENGINEER. CONSTRUCTION SHALL NOT CONTINUE UNTIL THE ENGINEER HAS ADDRESSED THE DISCREPANCIES.
4. THE WORK INCLUDES THE DREDGING, DEWATERING, TRANSPORT, AND DISPOSAL OF MATERIAL FROM PHILLIPPI CREEK. THE CONTRACTOR SHALL BE AWARE THAT THERE IS ONE PERMITTED DISPOSAL AREA. CONTRACTOR MAY PROVIDE A BID ALTERNATE USING ALTERNATE DMAS, WHICH MAY BE CONSIDERED AS A SEPARATE BID ALTERNATE LINE ITEM AS IDENTIFIED IN THE CONTRACT DOCUMENTS.
6. THE CONTRACTOR SHALL FAMILIARIZE THEMSELVES WITH ALL BRIDGE AND ROAD WEIGHT LIMITATIONS APPLICABLE TO TRUCKING OPERATIONS AND SHALL COMPLY ACCORDINGLY. REFER TO THE TECHNICAL SPECIFICATIONS FOR ADDITIONAL INFORMATION.

SURVEY NOTES

1. BATHYMETRIC SURVEY BY SURVTECH SOLUTIONS, DATED JANUARY 2025
2. HORIZONTAL DATUM UTILIZED FOR THIS PROJECT IS NAD 1983 FLORIDA WEST ZONE, 2011 ADJUSTMENT, U.S. SURVEY FEET.
3. VERTICAL DATUM UTILIZED FOR THIS PROJECT IS NAVD 1988, GEOID CONUS 18.

1. GEOTECHNICAL REPORT FOR AREA 1: "FIELD INVESTIGATION REPORT PHILLIPPI CREEK MAINTENANCE DREDGING FEASIBILITY STUDY PROJECT" DATED OCTOBER 2024 BY ATHENA TECHNOLOGIES.
2. GEOTECHNICAL REPORT FOR AREA 2: "FIELD INVESTIGATION REPORT PHILLIPPI CREEK MAINTENANCE DREDGING FEASIBILITY PROJECT UPSTREAM EXTENSION AREA" DATED AUGUST 2025 BY ATHENA TECHNOLOGIES.
3. RELEVANT BORING INFORMATION CAN BE FOUND IN CITED REPORTS.

1. PUBLISHED TIDAL ELEVATIONS ARE SHOWN IN THE CONSTRUCTION PLANS. CONTRACTOR MAY NEED TO ADJUST HIS WORK PLAN TO ACCOUNT FOR ACTUAL WATER LEVELS AND CHANGING WATER LEVELS. THE SITE MAY BE SUBJECT TO VARIABLE WAVE AND SURGE CONDITIONS AND IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO PROVIDE TEMPORARY SUPPORT FOR MARINE STRUCTURES AND SHORELINE DURING CONSTRUCTION. TIDAL DATA OBTAINED FROM NOAA STATION 8726384 PORT MANATEE, FLORIDA

3. POTENTIAL DEBRIS OR DISPLACED ROCKS IN THE DREDGING FOOTPRINT SHALL BE REMOVED.
2. DEBRIS AND ROCKS REMOVED FROM THE DREDGED AREA SHALL BE REMOVED FROM THE WATER. DISPOSAL SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR AND DISPOSAL SHALL BE AT AN APPROVED UPLAND SITE.
3. CONTRACTOR TO CONDUCT PRE-CONSTRUCTION HYDROGRAPHIC SURVEY OF DREDGING AND PLACEMENT AREAS AS WELL AS CONTRACT PAYMENT SURVEYS.
4. ALL TOWING OPERATIONS SHALL BE CONDUCTED "ON THE HIP" OR WITH FLOATING LINES TO PREVENT TOW CABLE DRAGS AND IMPACTS TO MARINE RESOURCES.
5. THE REMOVAL OF IN-SITU BEDROCK IS NOT ALLOWED.
6. MATERIAL TO BE BARGED OR PUMPED FROM DREDGED AREA TO DESIGNATED AND APPROVED DISPOSAL OR UPLAND DMMMA SITE AS DIRECTED BY APROVED PERMITS.
7. THE PROSECUTION OF WORK SHALL ENSURE THE STABILITY OF PIERS, BULKHEADS, AND OTHER STRUCTURES LYING ON OR ADJACENT TO THE SITE OF THE WORK, INsofar AS STRUCTURES MAY BE JEOPARDIZED BY DREDGING OPERATIONS. REPAIR DAMAGE RESULTING FROM DREDGING OPERATIONS, INsofar AS SUCH DAMAGE MAY BE CAUSED BY VARIATION IN LOCATIONS OR DEPTH OF DREDGING, OR BOTH, FROM THAT INDICATED OR PERMITTED UNDER THE CONTRACT.
8. THE MATERIAL REMOVED WILL BE MEASURED BY CUBIC YARD IN PLACE, BY MEANS OF SOUNDINGS TAKEN BEFORE AND AFTER DREDGING. THE DRAWINGS REPRESENT EXISTING CONDITIONS BASED ON CURRENT AVAILABLE INFORMATION, BUT WILL BE VERIFIED AND CORRECTED, IF NECESSARY, BY SOUNDINGS TAKEN BEFORE DREDGING IN EACH LOCALITY. SOUNDINGS WILL BE TAKEN BY 200 KHZ SURVEY FATHOMETER, AS DETERMINED BY THE ENGINEER; RESULTS OF SOUNDINGS WILL BE USED TO CONFIRM DREDGING IN ACCORDANCE TO PLANS.
9. PILES AND NAVIGATIONAL MARKERS TO BE TEMPORARILY REMOVED AND REINSTALLED AS REQUIRED.
10. DREDGING OPERATIONS NEAR BRIDGES SHALL COMPLY WITH THE FOLLOWING RESTRICTIONS TO PROTECT INFRASTRUCTURE AND MINIMIZE SCOUR RISKS:
 - 10.1. BRIDGE 170164 (US-41): DREDGING PERMITTED AS NEEDED BENEATH AND ADJACENT. MAINTAIN 10-FOOT HORIZONTAL BUFFER FROM PILE LOCATIONS. USE LOW-IMPACT METHODS WITHIN 50 FEET. CONDUCT PRE-CONSTRUCTION VISUAL INSPECTIONS
 - 10.2. BRIDGE 170165 (US-41): DREDGING PERMITTED PER THE CONSTRUCTION DRAWINGS WITH A REDUCED WIDTH CHANNEL FOOTPRINT. MAINTAIN 10-FOOT HORIZONTAL BUFFER FROM PILE LOCATIONS. PILES ARE SPACED APPROXIMATELY 28 FT APART TO BE VERIFIED BY CONTRACTOR. ESTABLISH NO-DREDGE ZONE MARKED WITH BUOYS. CONDUCT PRE-CONSTRUCTION VISUAL INSPECTIONS
 - 10.3. BRIDGE 170072 (PROCTOR ROAD): NO DREDGING DIRECTLY BENEATH (SCOUR CRITICAL). MAINTAIN 25 OFFSET UPSTREAM AND DOWNSTREAM OF BRIDGE PILINGs. ESTABLISH NO-DREDGE ZONE MARKED WITH BUOYS. CONDUCT PRE-CONSTRUCTION VISUAL INSPECTIONS
 - 10.4. BRIDGE 174065 (BEE RIDGE ROAD): NO DREDGING DIRECTLY BENEATH (SCOUR CRITICAL). MAINTAIN 10-FOOT HORIZONTAL BUFFER FROM PILE LOCATIONS. ESTABLISH NO-DREDGE ZONE MARKED WITH BUOYS. CONDUCT PRE-CONSTRUCTION VISUAL INSPECTIONS.
 - 10.5. BRIDGE 174069 (SOUTH TUTTLE AVENUE): DREDGING PERMITTED AS NEEDED BENEATH AND ADJACENT. MAINTAIN 10-FOOT HORIZONTAL BUFFER FROM PILE LOCATIONS. USE LOW-IMPACT METHODS WITHIN 50 FEET. CONDUCT PRE-CONSTRUCTION VISUAL INSPECTIONS.
 - 10.6. MONTE CARLO DRIVE: DREDGING PERMITTED AS NEEDED BENEATH AND ADJACENT. MAINTAIN 10-FOOT HORIZONTAL BUFFER FROM PILE LOCATIONS. PILES ARE SPACED APPROXIMATELY 40 FT APART TO BE VERIFIED BY CONTRACTOR. USE LOW-IMPACT METHODS WITHIN 50 FEET. CONDUCT PRE-CONSTRUCTION VISUAL INSPECTIONS
- 10.7. THE CONTRACTOR SHALL PROVIDE A MINIMUM OF FORTY-EIGHT (48) HOURS ADVANCE WRITTEN NOTICE TO THE ENGINEER PRIOR TO INITIATING ANY CONSTRUCTION ACTIVITY NEAR BRIDGES.
- 10.8. THE CONTRACTOR SHALL BE RESPONSIBLE FOR FIELD VERIFYING ALL BRIDGE CLEARANCES PRIOR TO THE COMMENCEMENT OF WORK.


11. SPOIL MATERIAL WILL BE DE-WATERED ON SITE WHILE SURROUNDED BY EROSION CONTROL DEVICES (SUCH AS BERMS OR HAY BALES.) THE HANDLING AND STORAGE OF THE SPOIL MATERIAL WILL BE COMPLETED IN A MANNER THAT PREVENTS SEDIMENTATION, EROSION, AND TURBIDITY DURING DE-WATERING, OVERFLOW, TRANSFER, AND STORAGE OF THE MATERIAL.
12. CONTRACTOR SHALL SUBMIT A TURBIDITY CONTROL PLAN FOR REVIEW AND APPROVAL PRIOR TO CONSTRUCTION IN ACCORDANCE WITH TECHNICAL SPECIFICATIONS AND REGULATORY PERMITS.
13. TURBIDITY CURTAIN SHALL BE MONITORED VISUALLY AS OUTLINED IN THE SPECIFICATIONS AND REGULATORY PERMITS.
14. TURBIDITY CURTAINS SHALL BE DEPLOYED AT THE SPOIL MATERIAL DISPOSAL LOCATIONS IN ACCORDANCE WITH THE APPROVED ENVIRONMENTAL PERMITS.
15. CONTRACTOR SHALL DEPLOY PHASED TURBIDITY CURTAINS AS APPLICABLE WITHIN THE PROJECT TURBIDITY CONTROL LIMITS WITH A FLOATING CURTAIN LENGTH FOR EFFICIENT PRODUCTION WITH HIS DREDGE PLANT AND ASSOCIATED FLOATING EQUIPMENT. THESE PHASED TURBIDITY CONTROL MEASURES WILL BE RELOCATED AS THE PROJECT PROGRESSES WITHIN THE PROJECT TURBIDITY CONTROL LIMITS.
16. TURBIDITY CURTAINS SHALL NOT BE RELOCATED/REMOVED AT THE DISCHARGE SITE UNTIL LEVELS WITHIN THE ENCLOSED AREA RETURN TO BACKGROUND LEVELS OUTSIDE THE CURTAINS.
17. TURBIDITY CURTAINS SHALL BE FLOATING WITH WEIGHTED SKIRTS THAT EXTEND TO WITHIN 1 FOOT OF THE SEA BOTTOM.
18. CONTRACTOR TO PROVIDE TURBIDITY MONITORING IN ACCORDANCE WITH REGULATORY PERMITS.
19. CONSTRUCTION PERSONNEL SHALL OBSERVE ANY ESA-LISTED SPECIES OR MARINE MAMMALS. IF ANY INTERACTION OCCURS, THE INCIDENT WILL BE IMMEDIATELY REPORTED TO THE APPROPRIATE AGENCY. VESSEL OPERATORS WILL OPERATE AT "IDLE SPEED/NO WAKE" AT ALL TIMES WHILE OPERATING IN WATER DEPTHS WITH LESS THAN 4-FOOT CLEARANCE, OR IF A PROTECTED SPECIES HAS BEEN OBSERVED. ALL VESSELS WILL FOLLOW MARKED CHANNEL ROUTES. OPERATION OF MECHANICAL EQUIPMENT SHALL CEASE IF A PROTECTED SPECIES IS OBSERVED WITHIN A 50-FOOT RADIUS OF CONSTRUCTION EQUIPMENT AND SHALL RESUME ONLY WHEN THE SPECIES HAS LEFT THE AREA OF ITS OWN VOLITION.
20. THE CONTRACTOR SHALL NOT ANCHOR, PLACE PIPELINE, OR STAGE EQUIPMENT IN A MANNER THAT WILL CAUSE SEAGRASSES, ANCHORING, OR STAGING EQUIPMENT SHALL AVOID THESE SENSITIVE AREAS. IF SUCH ACTIVITIES CANNOT BE DONE WITHOUT AFFECTING THESE SENSITIVE AREAS, THE ACTIVITIES SHALL CEASE AND THE ENGINEER SHALL BE IMMEDIATELY NOTIFIED (NO LATER THAN THE MORNING FOLLOWING THE NEXT WORKING DAY IF THE INCIDENT OCCURS AFTER NORMAL WORKING HOURS). ANY ACTUAL OR POTENTIAL INCIDENT INVOLVING DAMAGE TO, OR DISTURBANCE OF, SEAGRASSES SHALL BE REPORTED.
21. REMOVAL OF MARINE DEBRIS SHALL REQUIRE VISUAL CONFIRMATION (E.G., DIVERS, SWIMMERS, AND CAMERA) THAT THE ITEM CAN BE REMOVED WITHOUT CAUSING FURTHER DAMAGE TO AQUATIC NATURAL RESOURCES.
22. MARINE DEBRIS SHALL BE LIFTED STRAIGHT UP AND NOT BE DRAGGED THROUGH SEAGRASS BEDS, CORAL REEFS, CORAL, OR HARD BOTTOM HABITATS. TRAWLING ALSO CANNOT BE USED AS A MEANS OF MARINE DEBRIS REMOVAL. DEBRIS SHALL BE PROPERLY DISPOSED OF IN APPROPRIATE FACILITIES IN ACCORDANCE WITH APPLICABLE FEDERAL AND STATE REQUIREMENTS.
23. ANY EQUIPMENT USED TO REMOVE DEBRIS SHALL NOT DISTURB THE SEAFLOOR.

1. FDEP (0151152-006 EE), USACE, AND LOCAL PERMITS COVER THE PROJECT. ALL CONDITIONS OF THE PERMITS, AND EXEMPTIONS SHALL BE ADHERED TO.

PROJECT:
PHILLIPPI CREEK
MAINTENANCE
DREDGING PROJECT

ADDRESS:

SARASOTA, FL

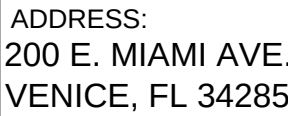

ENGINEER:

CUMMINS CEDERBERG
COASTAL & MARINE ENGINEERING
201 ALHAMBRA CIRCLE, SUITE 601
CORAL GABLES, FL 33134
TEL: +1 305 741-6155 FAX: +1 305-974-1969
WWW.CUMMINSCEDERBERG.COM
COA # 29062

CUMMINS | CEDERBERG
Coastal & Marine Engineering

PROJECT SPONSOR:



SARASOTA COUNTY PLANNING AND
DEVELOPMENT SERVICES,
ENVIRONMENTAL PROTECTION DIVISION
1001 SARASOTA CENTER BLVD
SARASOTA, FL 34240

SEAL:

[illegible]

CC PROJECT NO: 137125


DRAWN	GH
-------	----

CHECKED	KF/JB
---------	-------

SCALE	REFERS TO 22X34 SHEET
-------	-----------------------


GENERAL NOTES

CM-1.0

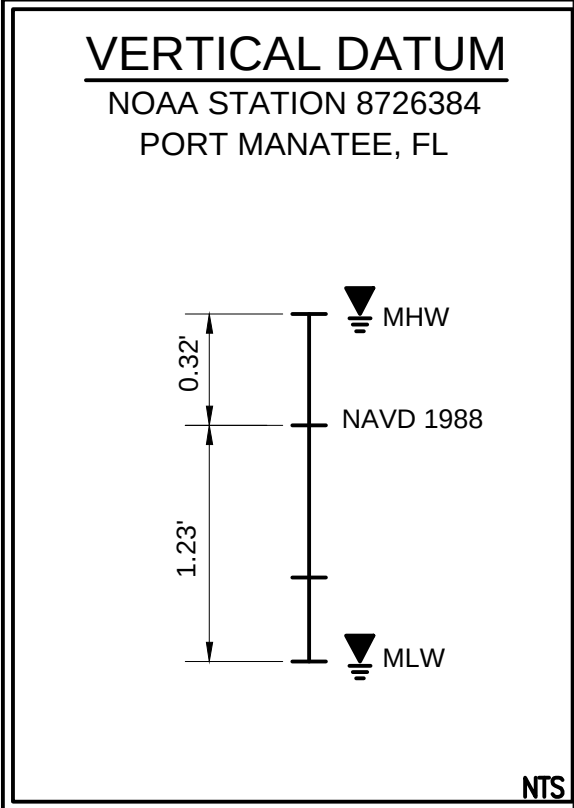


NTS

CM-1.1

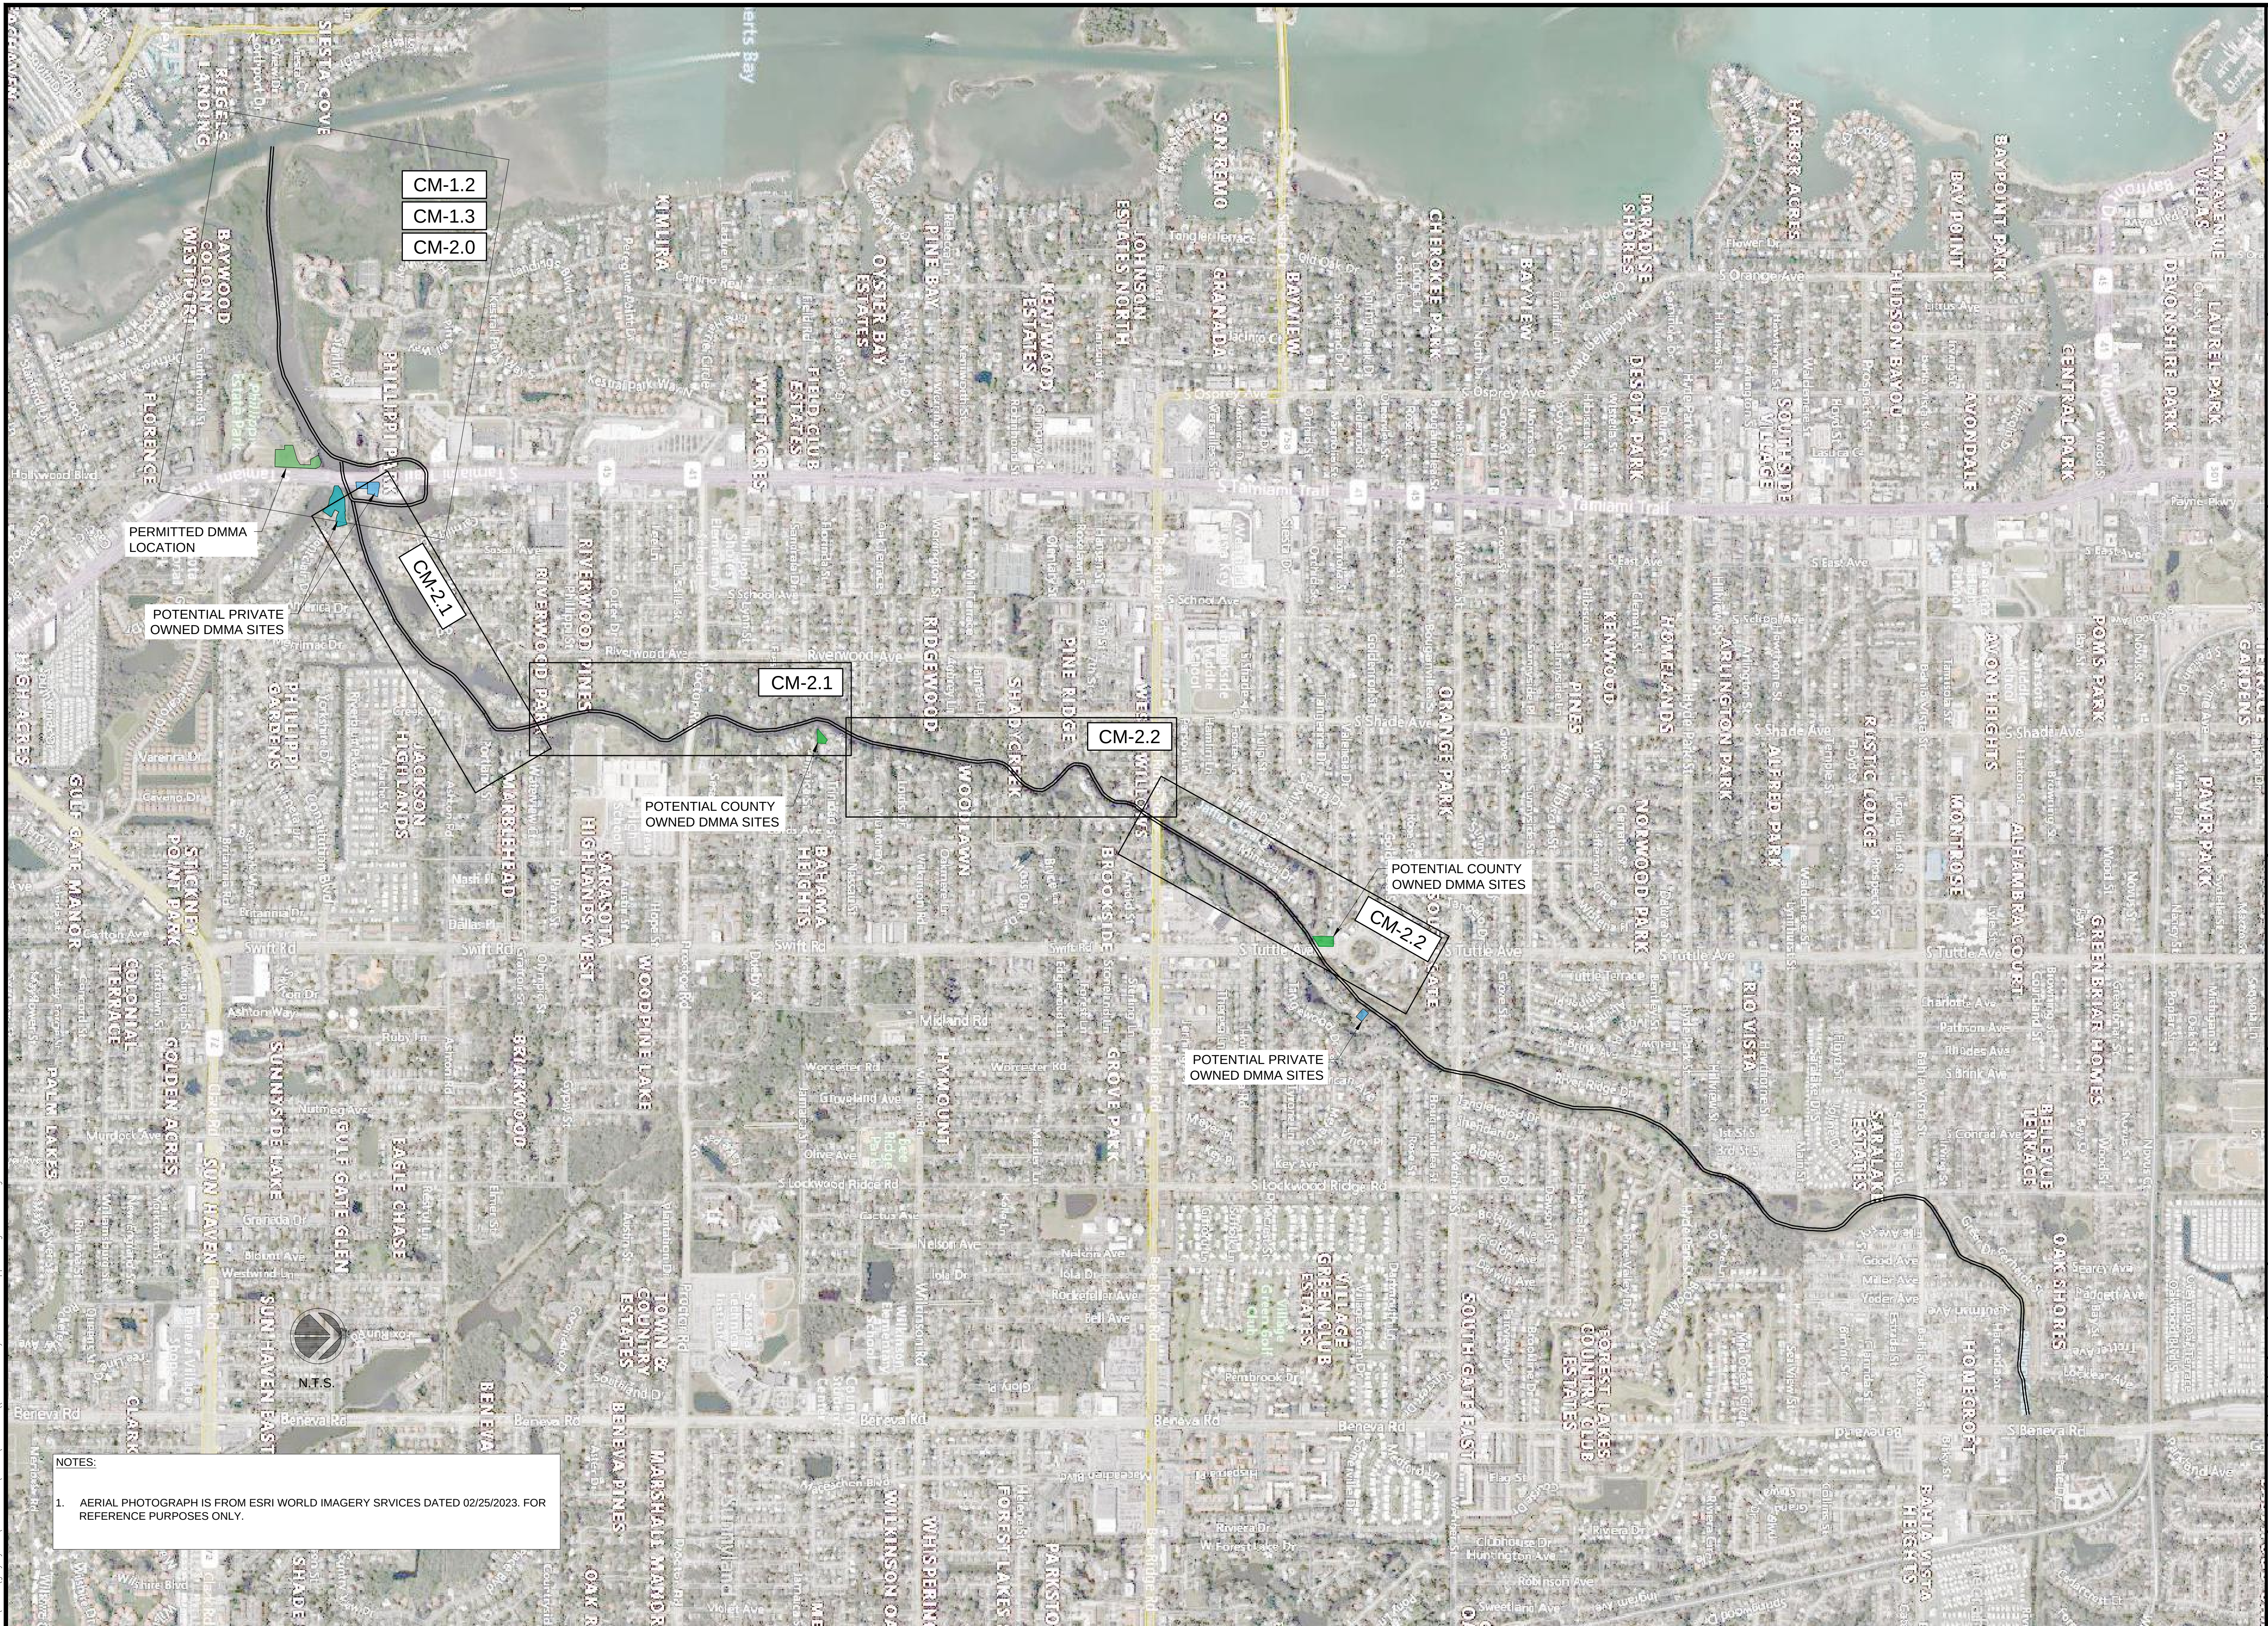


1. AERIAL PHOTOGRAPH IS FROM ESRI WORLD IMAGERY SERVICES DATED 02/25/2023. FOR REFERENCE PURPOSES ONLY.

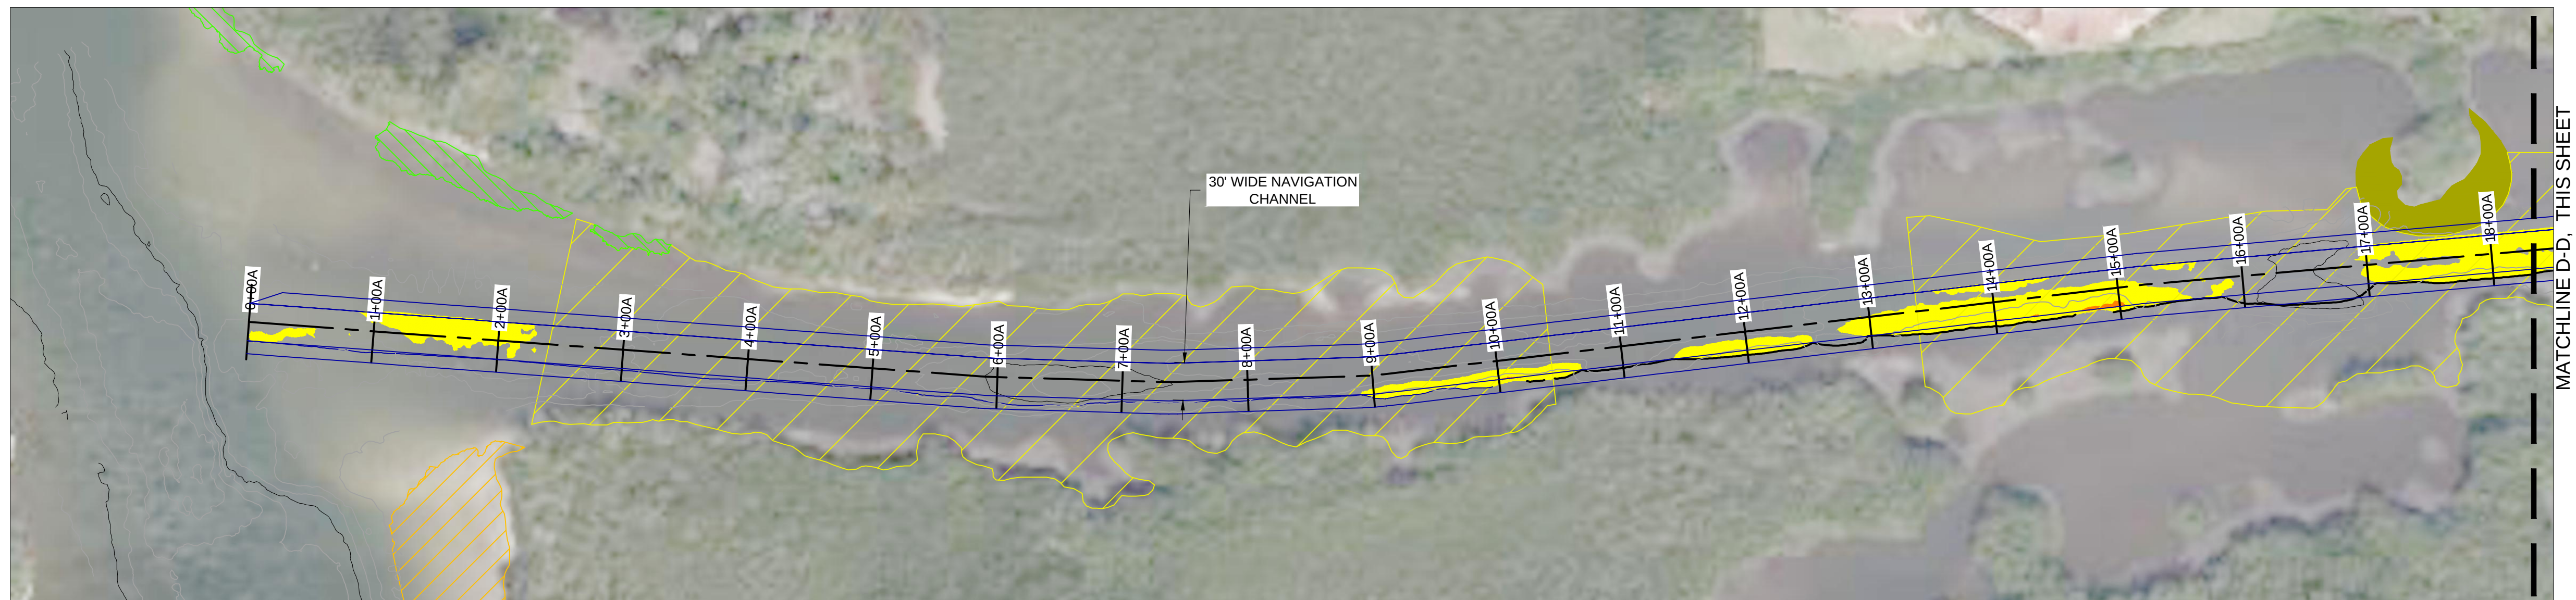

SEAGRASSES LEGEND		
 	Oyster Bed Oyster/Shell Hash Area	Seagrass Bed Species Coverage  Halodule wrightii, ~30%  Halodule wrightii and Halophila engelmannii, ~10-30%
 5-10  20-50	Oyster Patch, Size (ft²)	
 Halophila decipiens, 0-1  Halophila decipiens, 1-5  Halophila decipiens, 10-20  Halodule wrightii, 0-1  Halodule wrightii, 1-5  Halodule wrightii, 5-10	Seagrass Patch Species, Size (ft²)	Project-wide Total Resources Impacted by Prop. dredging Oyster Bed = 362 ft² Oyster/Shell Hash = 29,663 ft² Oyster Patch = 69 ft² Seagrasses = 25 ft²

SHOAL AREAS ABOVE CUT DEPTH OF -5.23' NAVD88	
CUT DEPTH (FT)	COLOR
>-3	
-2- to -3'	
0 to 2'	

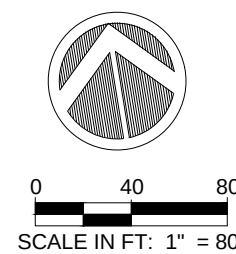

- NOTES:**

PROJECT:
PHILLIPPI CREEK
MAINTENANCE
DREDGING PROJECT

ADDRESS:

CLIENT:

ADDRESS:
200 E. MIAMI AVE.
VENICE, FL 34285

ENGINEER:

CUMMINS | CEDERBERG
Coastal & Marine Engineering

PROJECT SPONSOR:

SEAL:

[illegible]

CC PROJECT NO:	137125
----------------	--------

SHEET TITLE
PROPOSED CHANNEL CUT
DEPTHS & MARINE
RESOURCES PARTIAL
PLANS (1 OF 2)

CM-1.2

SEAL:

[illegible]

CC PROJECT NO:	137125
----------------	--------

DRAWN	GK
-------	----

CHECKED	KF/JB
---------	-------

SCALE	REFERS TO 22X34 SHEET
-------	-----------------------

SHEET TITLE
PROPOSED CHANNEL CUT
DEPTHS & MARINE
RESOURCES PARTIAL
PLANS (1 OF 2)


CM-1.3



MATCHLINE E-E SHEET CM-2.5

SEAGRASSES LEGEND		
 	Oyster Bed Oyster/Shell Hash Area	Seagrass Bed Species Coverage  Halodule wrightii, ~30%  Halodule wrightii and Halophila engelmannii, ~10-30%
 5-10  20-50	Oyster Patch, Size (ft²)	
 Halophila decipiens, 0-1  Halophila decipiens, 1-5  Halophila decipiens, 10-20  Halodule wrightii, 0-1  Halodule wrightii, 1-5  Halodule wrightii, 5-10	Seagrass Patch Species, Size (ft²)	Project-wide Total Resources Impacted by Prop. dredging Oyster Bed = 362 ft² Oyster/Shell Hash = 29,663 ft² Oyster Patch = 69 ft² Seagrasses = 25 ft²

SHOAL AREAS ABOVE CUT DEPTH OF -5.23' NAVD88	
CUT DEPTH (FT)	COLOR
>-3	
-2- to -3'	
0 to 2'	

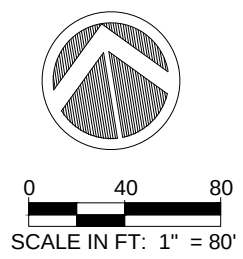


NOTES:

1. BATHYMETRIC SURVEY BY SURVTECH SOLUTIONS, DATED JANUARY, 2025.
2. HORIZONTAL DATUM UTILIZED FOR THIS PROJECT IS NAD 1983 FLORIDA WEST ZONE, 2011 ADJUSTMENT, U.S. SURVEY FEET.
3. VERTICAL DATUM UTILIZED FOR THIS PROJECT IS NAVD 1988, GEOID CONUS 18.
4. THE UNITS UTILIZED FOR THIS PROJECT ARE U.S. SURVEY FEET.
5. AERIAL PHOTOGRAPH IS FROM ESRI WORLD IMAGERY SURVEY DATED 02/25/2023. FOR REFERENCE PURPOSES ONLY.
6. DESIGN DREDGE DEPTH IS TO -5.23' NAVD88 (-4.0' MLW).

GEOTECHNICAL BORINGS				
BORING ID	BOTTOM OF BORING ELEV. (FT. MLW)	LAT	LONG	NOTES
PC-24-01	-7.8	27.2713712	-082.5364077	
PC-24-02	-7.1	27.2714540	-082.5347875	
PC-24-03	-5.2	27.2726423	-082.5319393	ENCOUNTERED REFUSAL IN SHELLS WITH CLAY
PC-24-04	-6.6	27.2740996	-082.5310028	
PC-24-05	-4.2	27.2753163	-082.5312348	MADE TWO ATTEMPTS. ENCOUNTERED REFUSAL ON ROCK FRAGMENTS/LIMESTONE
PC-24-06	-4.7	27.2757735	-082.5297122	
PC-24-07	-4.2	27.2748293	-082.5297080	ENCOUNTERED REFUSAL
PC-24-08	-5.0	27.2740147	-082.5297819	
PCV-25-01	-6.4	27.2741050	-082.5278672	
PCV-25-02	-5.4	27.2814454	-082.5239101	
PCV-25-03	-6.3	27.2855967	-082.5223829	
PCV-25-04	-6.8	27.2890944	-082.5220520	
PCV-25-05	-8.0	27.2958609	-082.5218496	
PCV-35-06	-7.2	27.2969167	-082.5200596	
PCV-25-07	-5.6	27.2969167	-082.5203956	
PCV-25-08	-6.2	27.3003888	-082.5176630	
PCV-25-09	-5.0	27.3015070	-082.5168246	
PCV-25-10	-5.2	27.3033608	-082.5150523	

SHOAL AREAS ABOVE CUT DEPTH OF -5.23' NAVD88	
CUT DEPTH (FT)	COLOR
>-3	Red
-2' to -3'	Orange
0 to 2'	Yellow

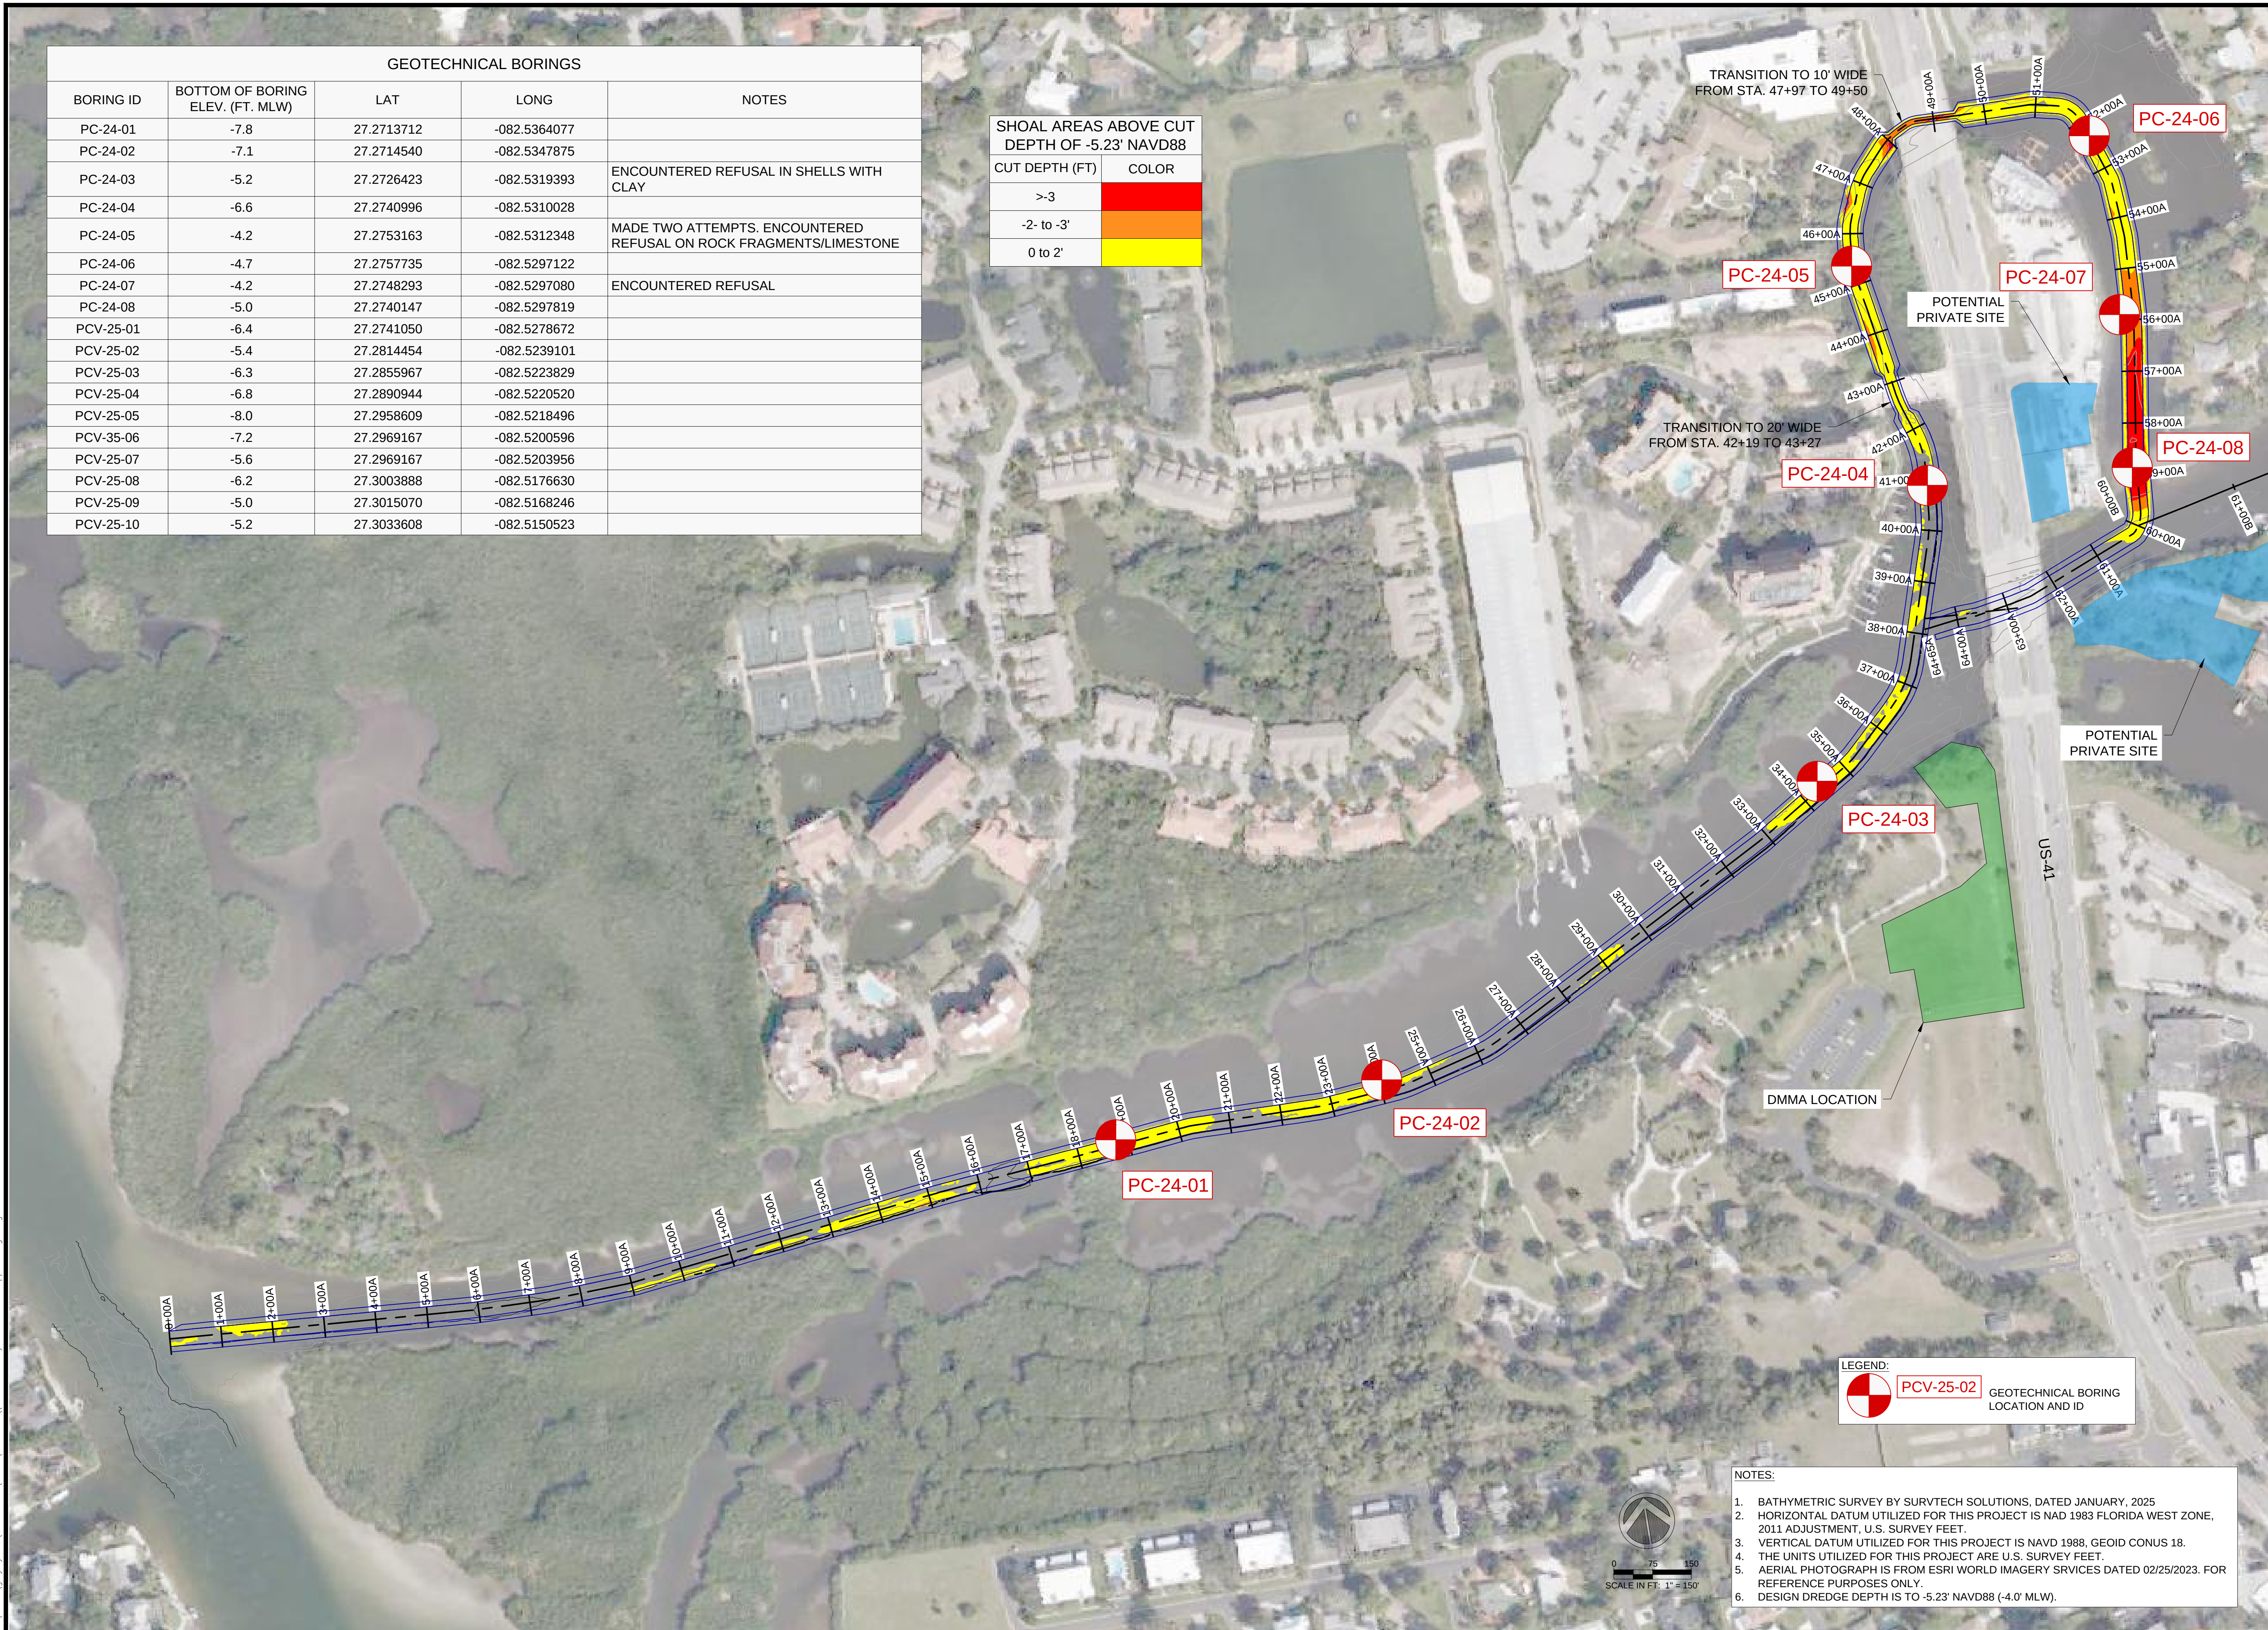

PROJECT:
PHILLIPPI CREEK
MAINTENANCE
DREDGING PROJECT

ADDRESS:
SARASOTA, FL

CLIENT:

 **WCIND**
West Coast Inland Navigation District

ADDRESS:
200 E. MIAMI AVE.
VENICE, FL 34285

ENGINEER:
CUMMINS CEDERBERG
COASTAL & MARINE ENGINEERING
201 ALHAMBRA CIRCLE, SUITE 601
CORAL GABLES, FL 33134
TEL: +1 305 741-6155 FAX: +1 305-974-1969
WWW.CUMMINSCEDERBERG.COM
COA # 29062

CUMMINS | CEDERBERG
Coastal & Marine Engineering

PROJECT SPONSOR:


SARASOTA COUNTY PLANNING AND
DEVELOPMENT SERVICES,
ENVIRONMENTAL PROTECTION DIVISION
1001 SARASOTA CENTER BLVD
SARASOTA, FL 34240

SEAL:



[illegible]

CC PROJECT NO:	137125
DRAWN	GK
CHECKED	KF/JB
SCALE	REFERS TO 22X34 SHEET

EXISTING
CONDITIONS/DREDGING
PLAN (1 OF 3)

CM-2.0

C:\Users\krystyniak\Documents\WORK\1371250\1371250\2025-09-29\C 137125 Philippi Dredge.dwg

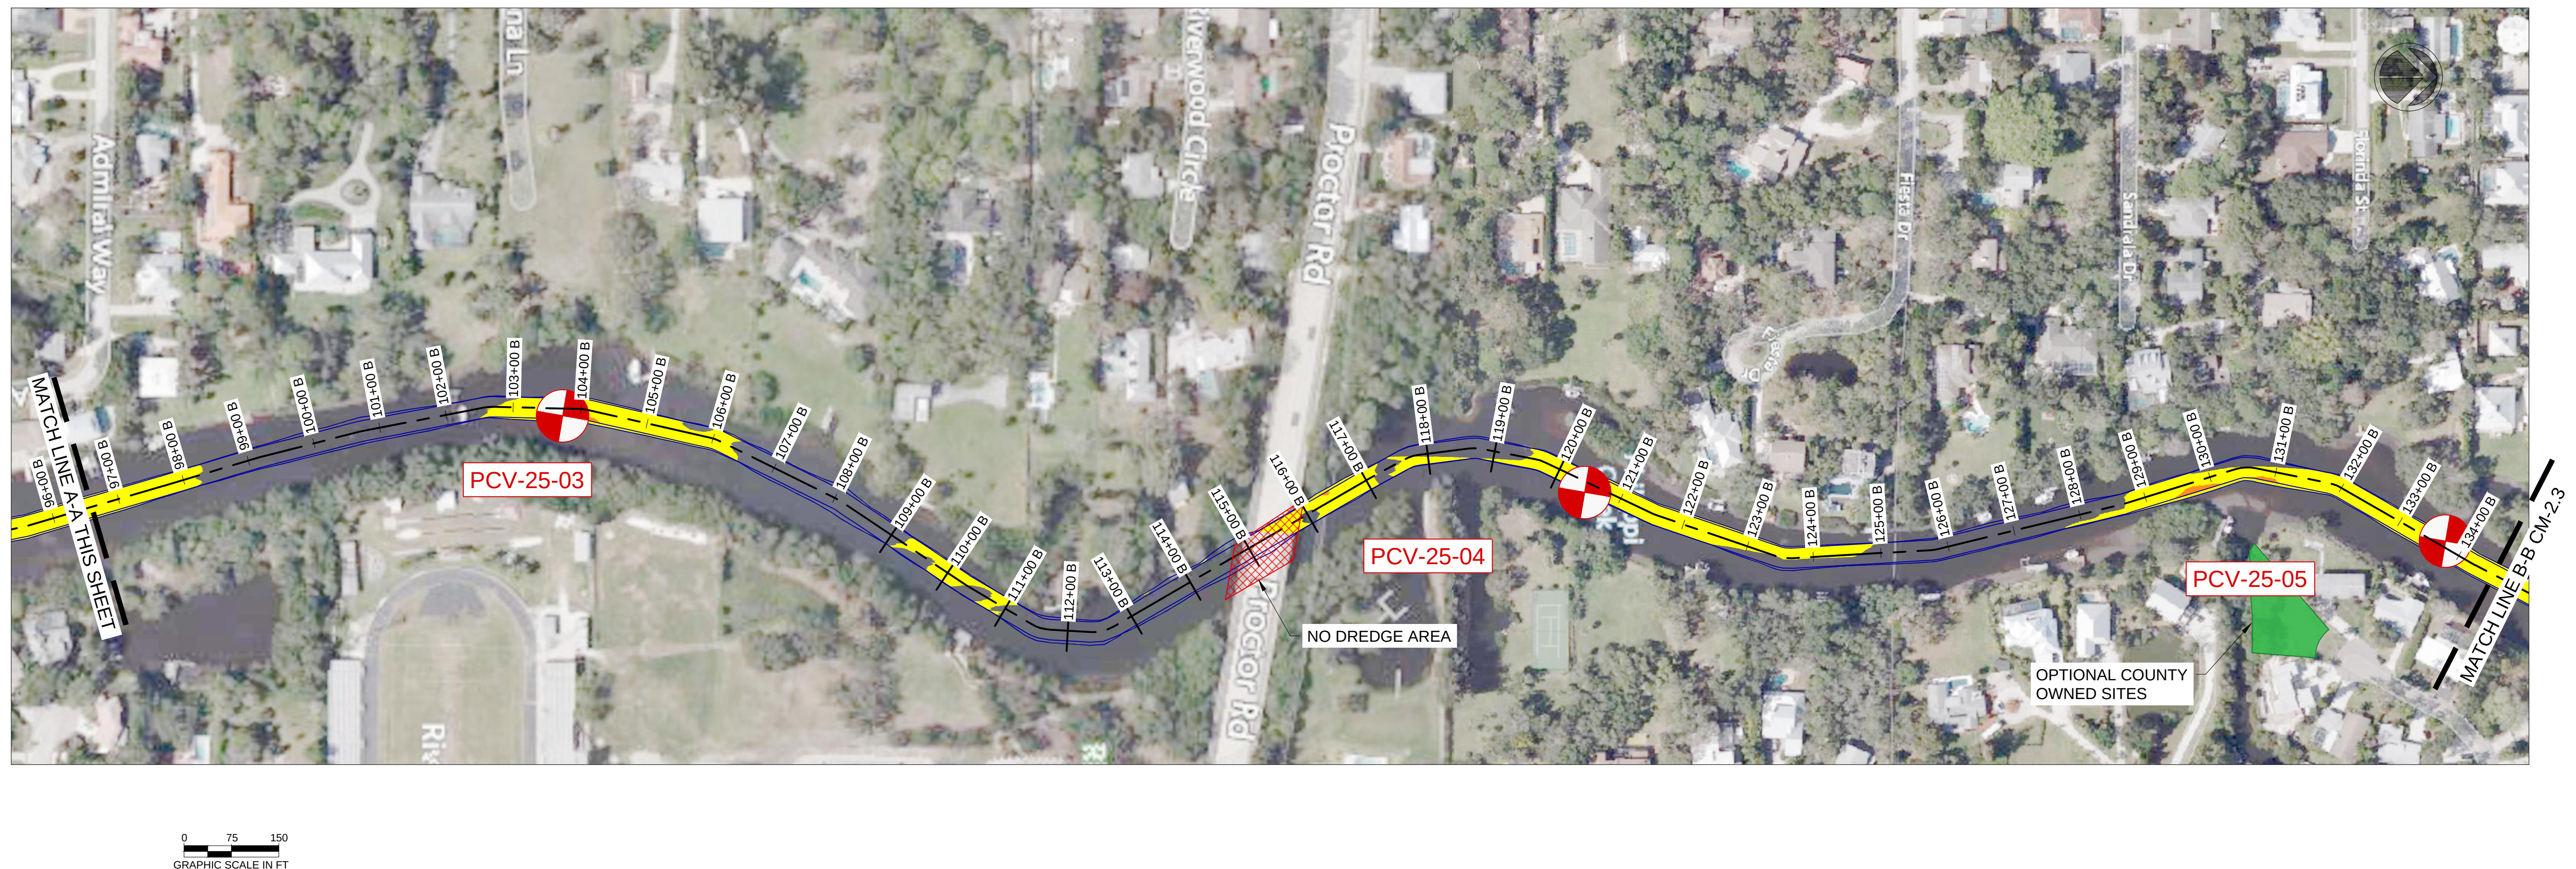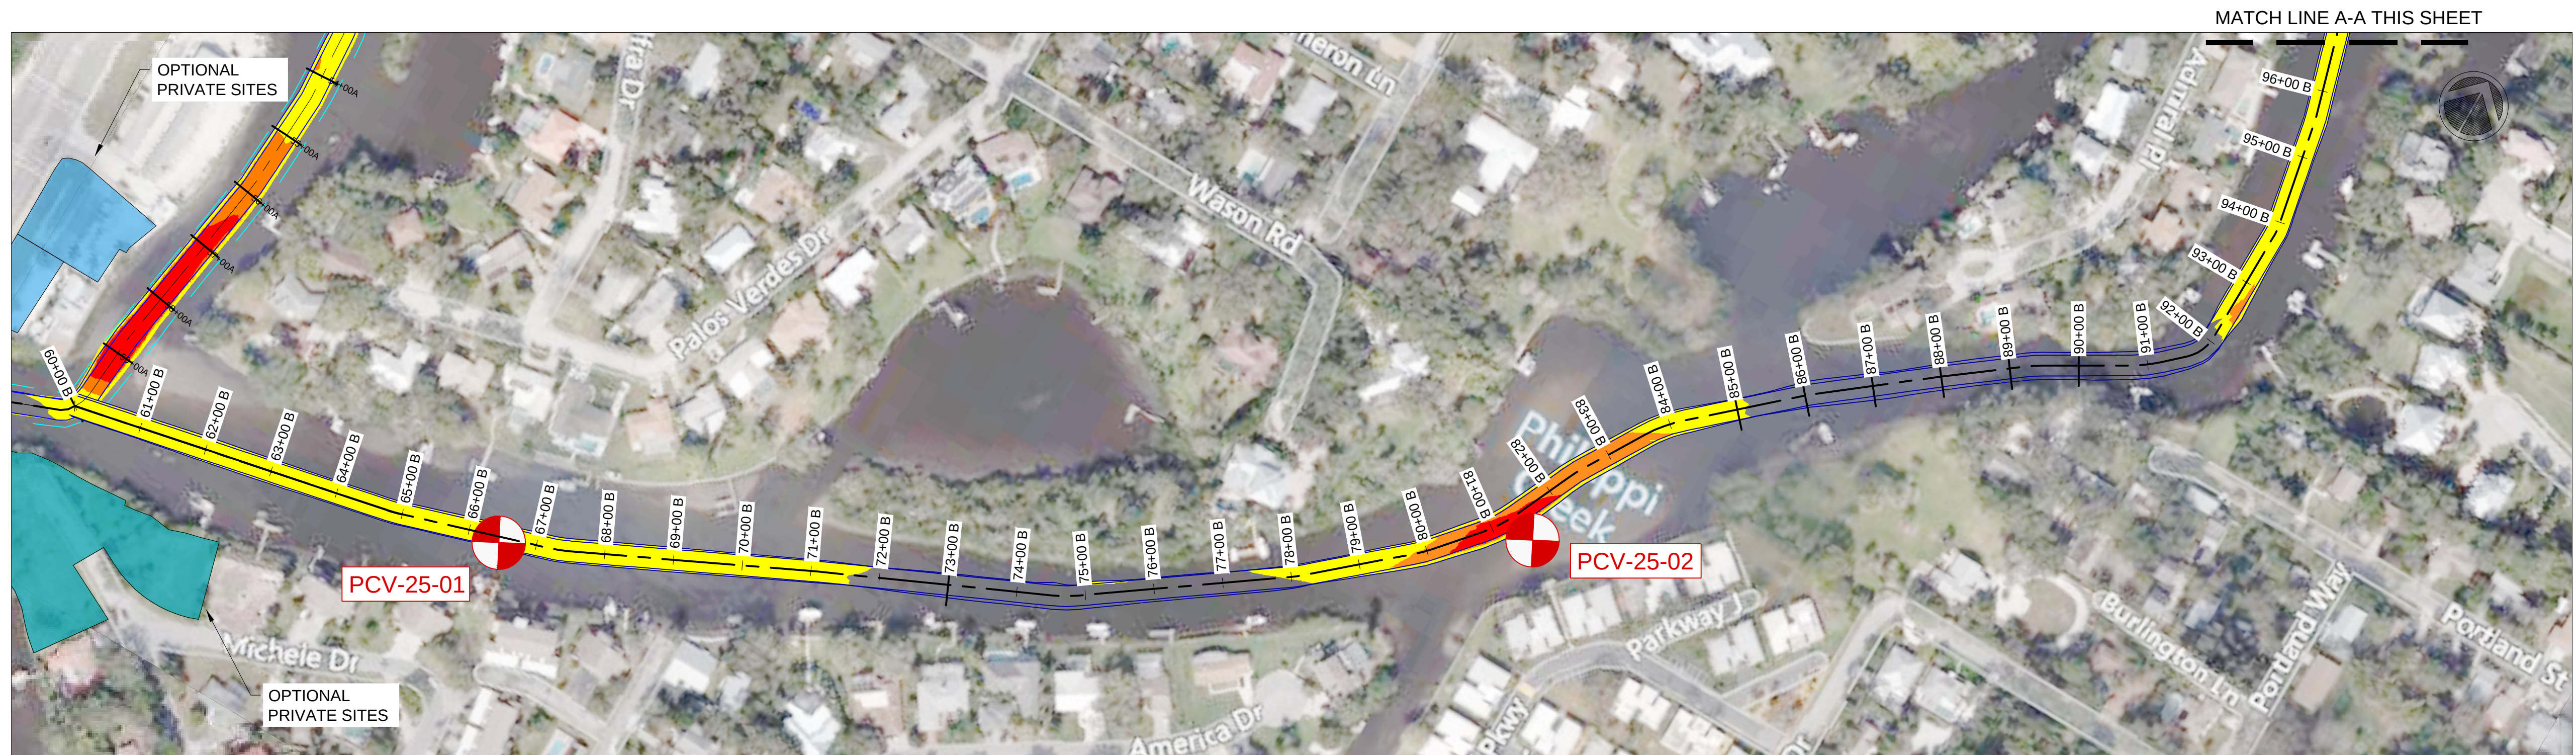

- | | |
|---------------|--|
| NOTES: | |
| 1. | BATHYMETRIC SURVEY BY SURVTECH SOLUTIONS, DATED JANUARY 2025 |
| 2. | HORIZONTAL DATUM UTILIZED FOR THIS PROJECT IS NAD 1983 FLORIDA WEST ZONE, 2011 ADJUSTMENT, U.S. SURVEY FEET. |
| 3. | VERTICAL DATUM UTILIZED FOR THIS PROJECT IS NAVD 1988, GEOID CONUS 18. |
| 4. | THE UNITS UTILIZED FOR THIS PROJECT ARE U.S. SURVEY FEET. |
| 5. | AERIAL PHOTOGRAPH IS FROM ESRI WORLD IMAGERY SERVICES DATED 02/25/2023. FOR REFERENCE PURPOSES ONLY. |
| 6. | NO DREDGING BETWEEN STA. 114+72 TO 115+88 DUE TO BRIDGE BEING SCOUR CRITICAL. |

LEGEND:

	PCV-25-02	GEOTECHNICAL BORING LOCATION AND ID
		NO DREDGE AREA

SHOAL AREAS ABOVE CUT DEPTH OF -5.23' NAVD88	
CUT DEPTH (FT)	COLOR
>-3	Red
-2- to -3'	Orange
0 to 2'	Yellow

PROJECT:
PHILLIPPI CREEK
MAINTENANCE
DREDGING PROJECT

ADDRESS:
SARASOTA, FL

CLIENT:

 **WCIND**
West Coast Inland Navigation District

ADDRESS:
200 E. MIAMI AVE.
VENICE, FL 34285

ENGINEER:
CUMMINS CEDERBERG
COASTAL & MARINE ENGINEERING
201 ALHAMBRA CIRCLE, SUITE 601
CORAL GABLES, FL 33134
TEL: +1 305 741-6155 FAX: +1 305-974-1969
WWW.CUMMINSCEDERBERG.COM
COA # 29062

CUMMINS | CEDERBERG
Coastal & Marine Engineering

PROJECT SPONSOR:


SARASOTA COUNTY PLANNING AND
DEVELOPMENT SERVICES,
ENVIRONMENTAL PROTECTION DIVISION
1001 SARASOTA CENTER BLVD
SARASOTA, FL 34240

SEAL:

[illegible]

CC PROJECT NO:	137125
----------------	--------

DRAWN	GK
-------	----

CHECKED	KF/JB
---------	-------


SCALE	REFERS TO 22X34 SHEET
-------	-----------------------

SHEET TITLE



EXISTING
CONDITIONS/DREDGING
PLAN (2 OF 3)

CM-2.1

C:\Users\glorystynak\Documents\WORK\1371250\2025-09-29\CM-2.3\137125_Phillippi Dredge.dwg

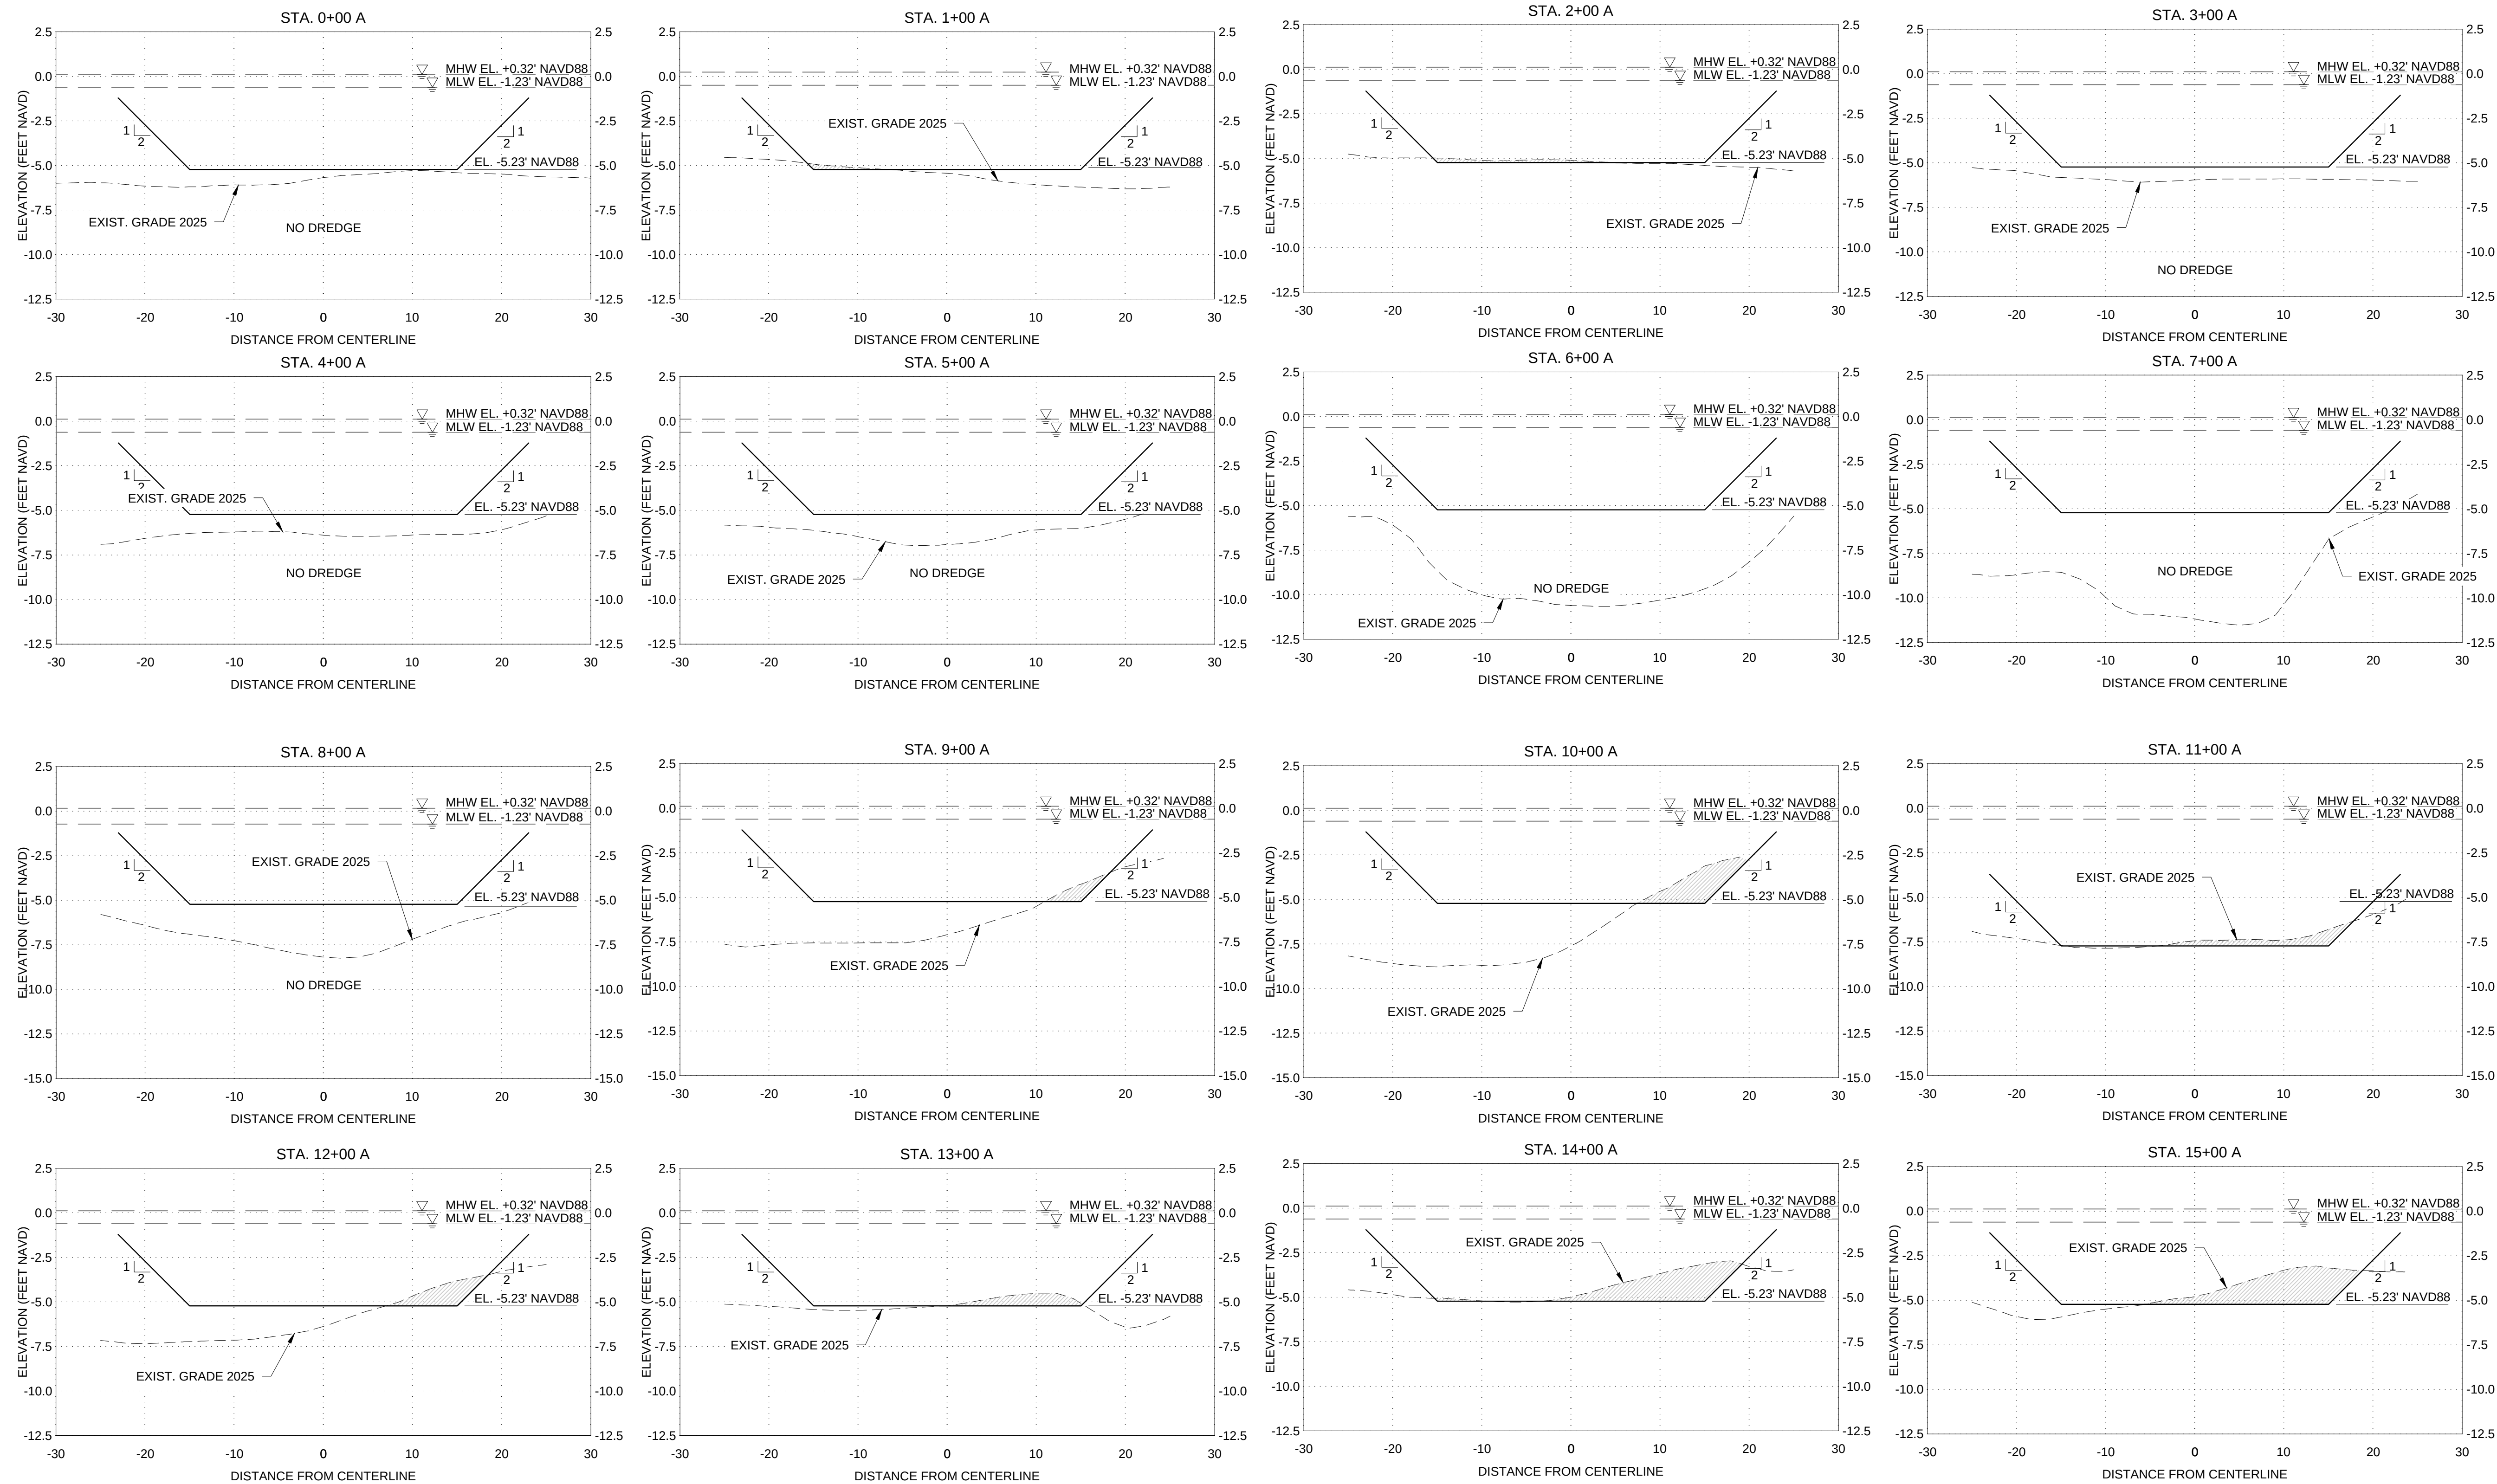

NOTE:
AREA SHOWN WITH SHOALING ARE BSAED ON THE DESIGN SURVEY
COMPILED BY SURVTECH SOLUTIONS DATED JANUARY 2025. THE
CONTRACTOR SHALL CONDUCT A PRE-DREDGE SURVEY TO DETERMINE
ACTUAL AREAS REQUIRING DREDGING.

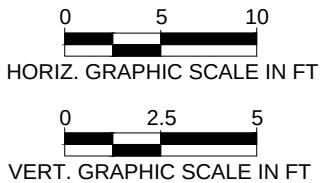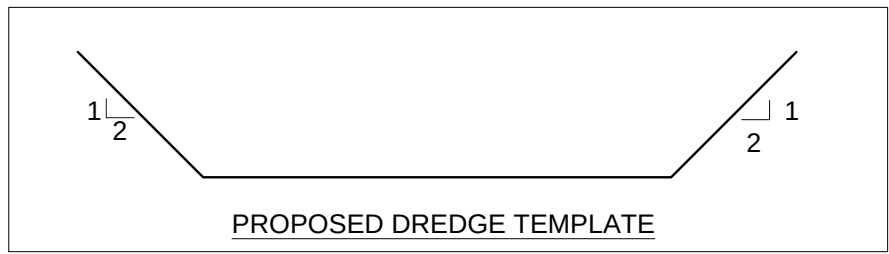

PROJECT:
PHILLIPPI CREEK
MAINTENANCE
DREDGING PROJECT

ADDRESS:

SARASOTA, FL

CLIENT:



ADDRESS:

200 E. MIAMI AVE.
VENICE, FL 34285

ENGINEER:

CUMMINS CEDERBERG
COASTAL & MARINE ENGINEERING
201 ALHAMBRA CIRCLE, SUITE 601
CORAL GABLES, FL 33134
TEL: +1 305 741-6155 FAX: +1 305-974-1969
WWW.CUMMINSCEDERBERG.COM
COA # 29062

CUMMINS | CEDERBERG
Coastal & Marine Engineering

PROJECT SPONSOR:



SARASOTA COUNTY PLANNING AND
DEVELOPMENT SERVICES,
ENVIRONMENTAL PROTECTION DIVISION
1001 SARASOTA CENTER BLVD
SARASOTA, FL 34240

SEAL:

CONSTRUCTION DRAWINGS	SUBMISSION / REVISION	DATE	ISSUE
		09/29/2025	1

CC PROJECT NO: 137125

DRAWN GK

CHECKED KF/JB

















SCALE REFERS TO 22X34 SHEET

SHEET TITLE



CROSS SECTIONS
(1 OF 13)

CM-2.3

C:\Users\glorystynak\Documents\WORK\1371250\2025-09-29\CM-2.4\137125_Phillippi Dredge.dwg

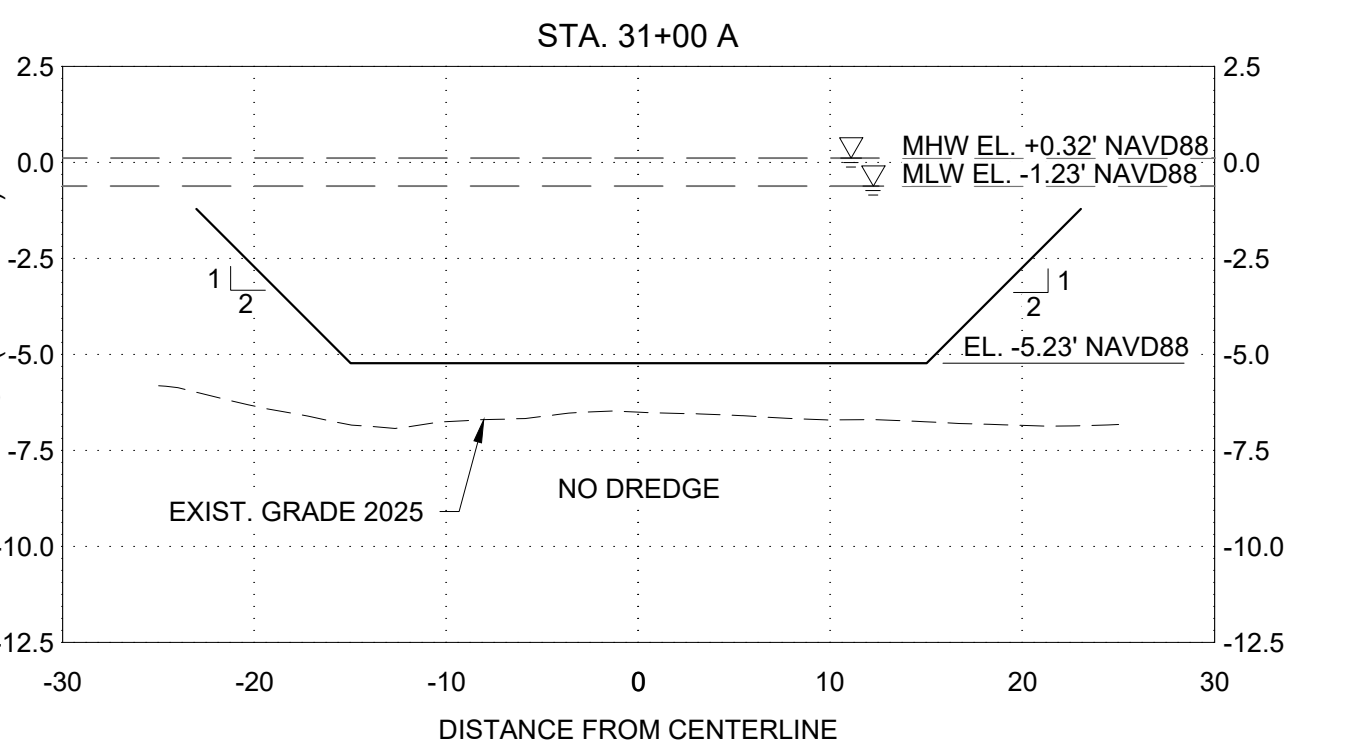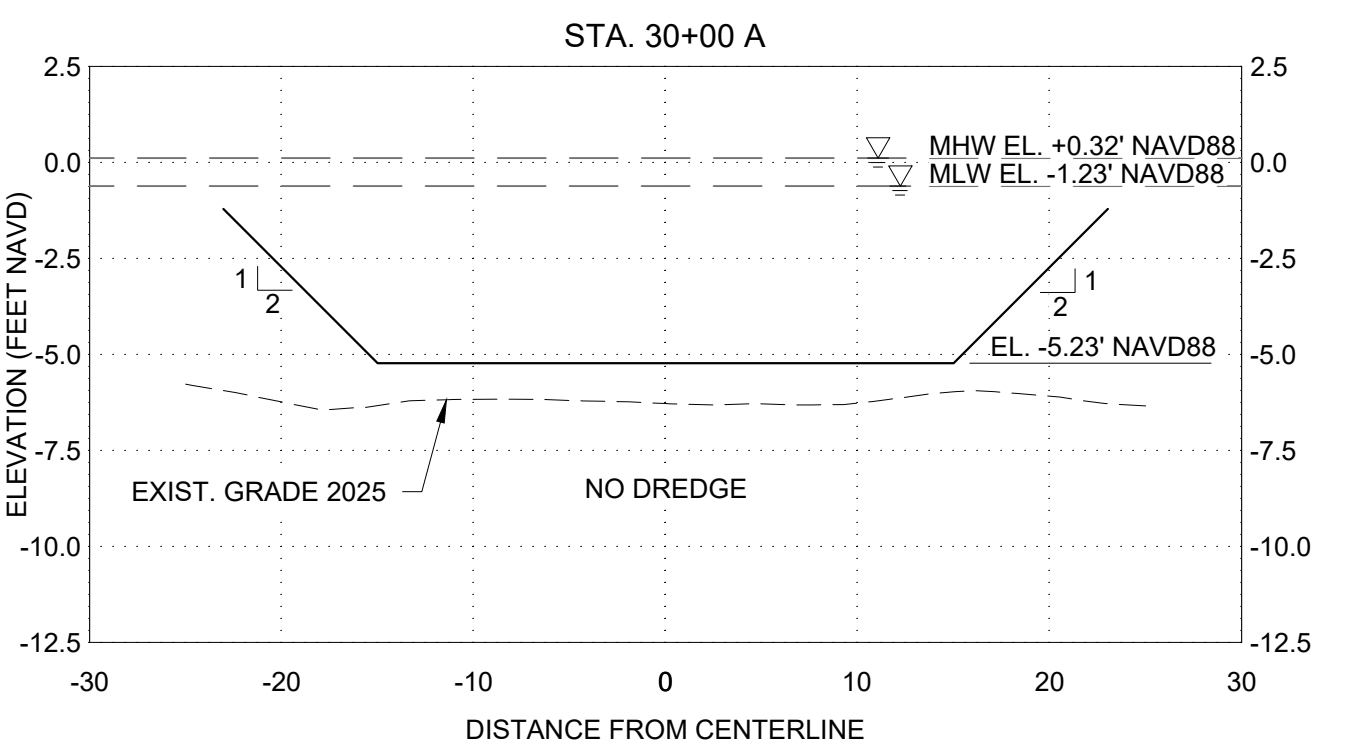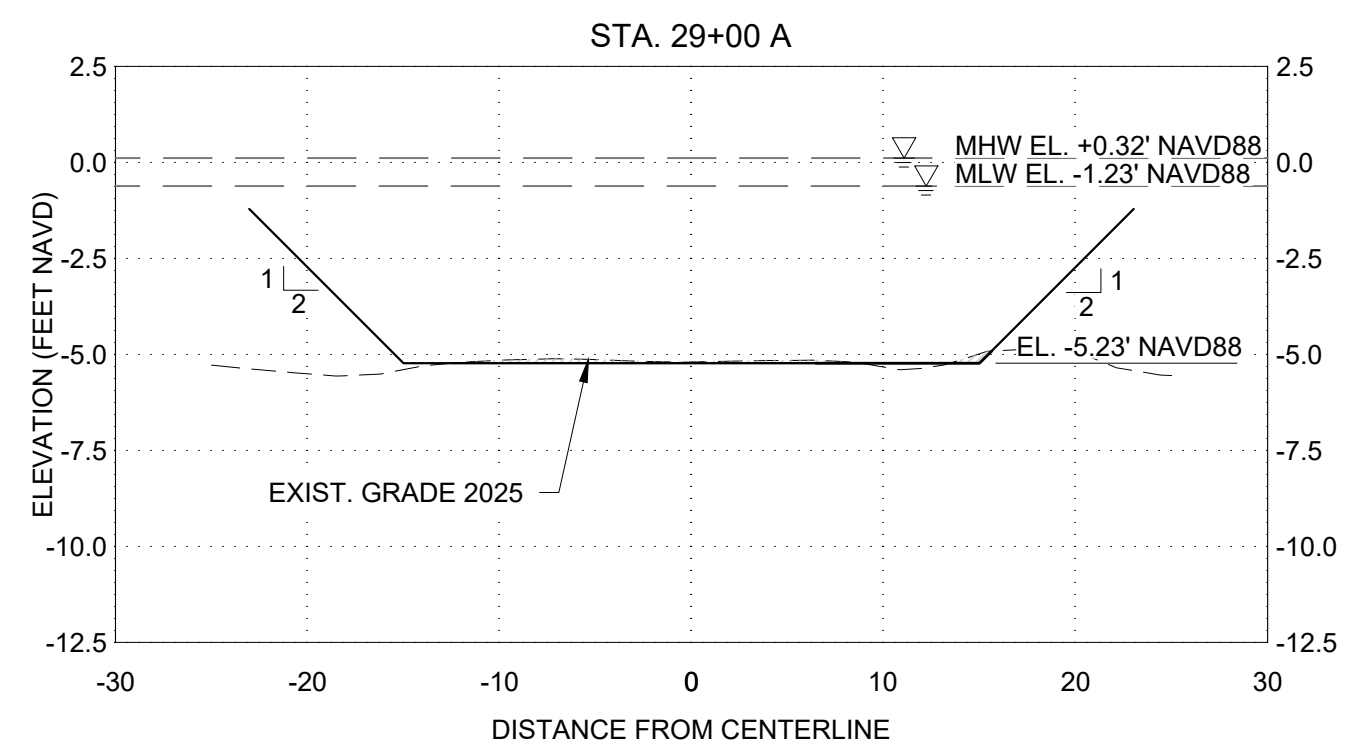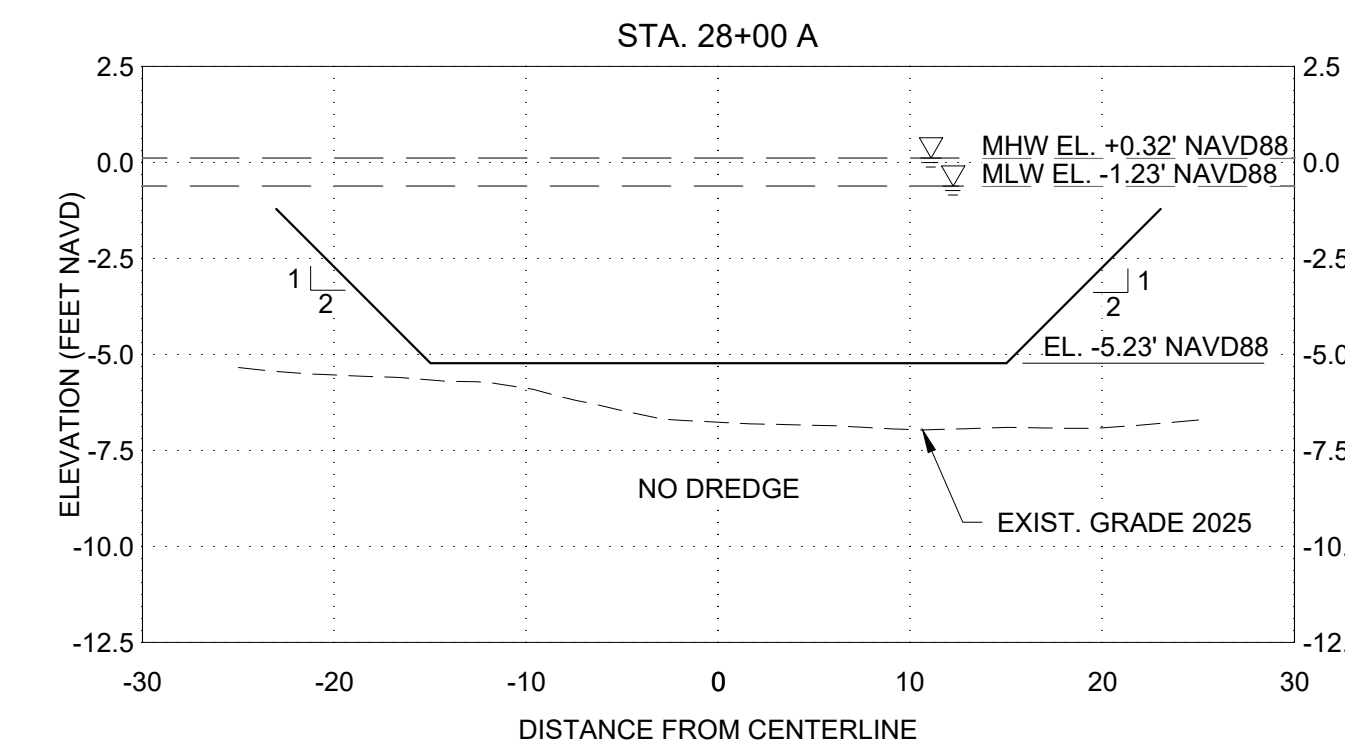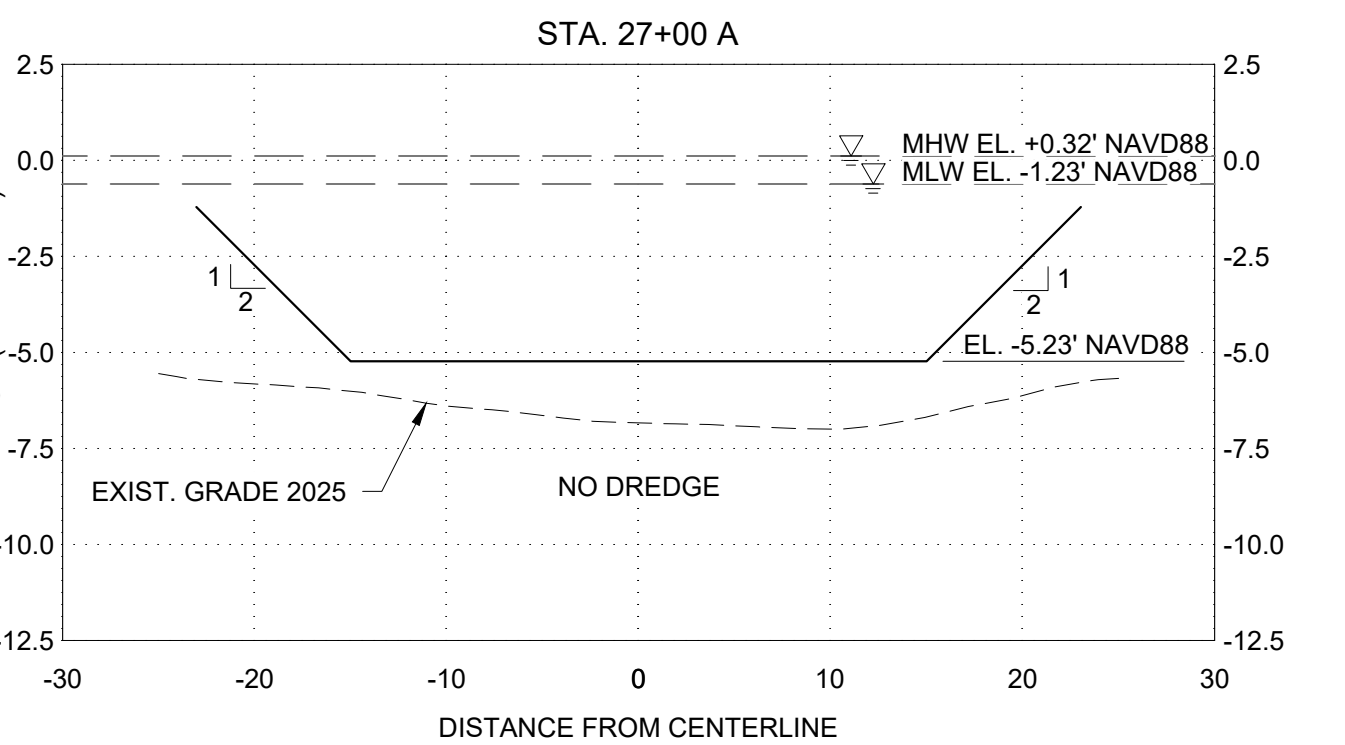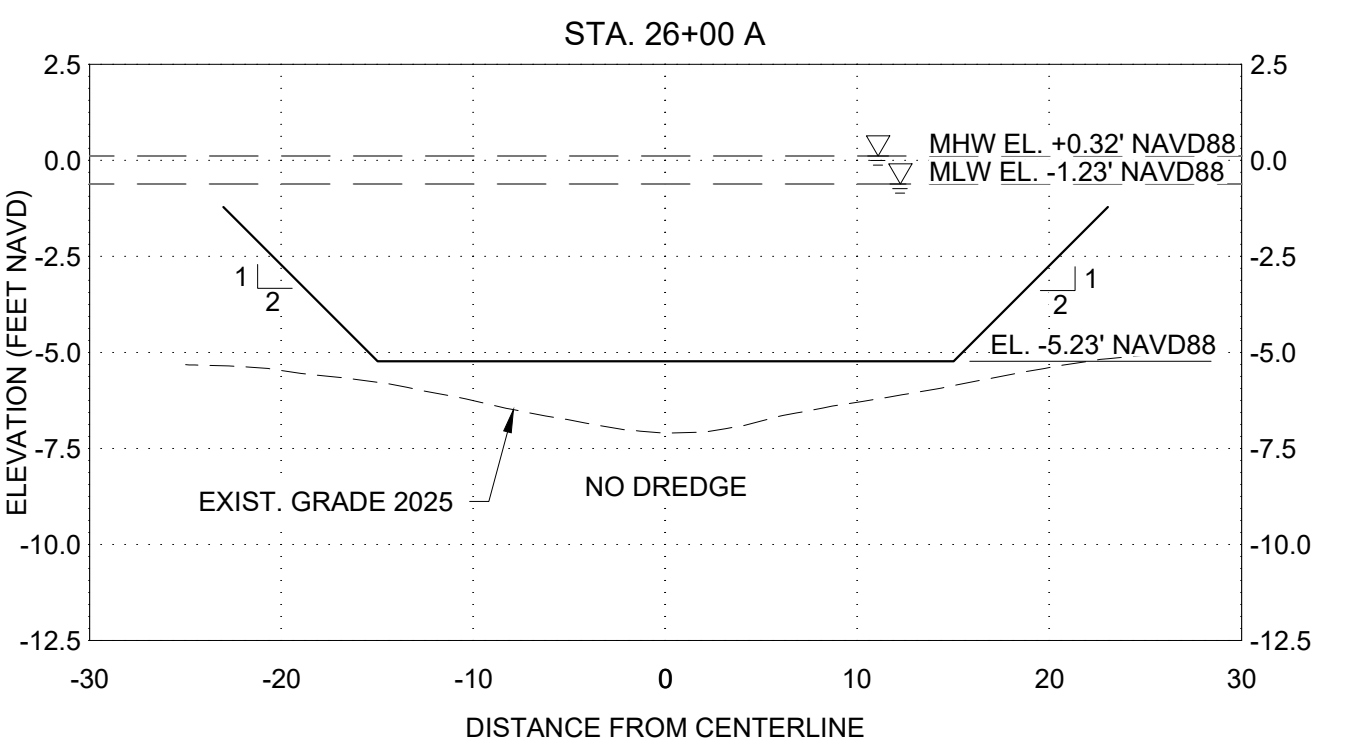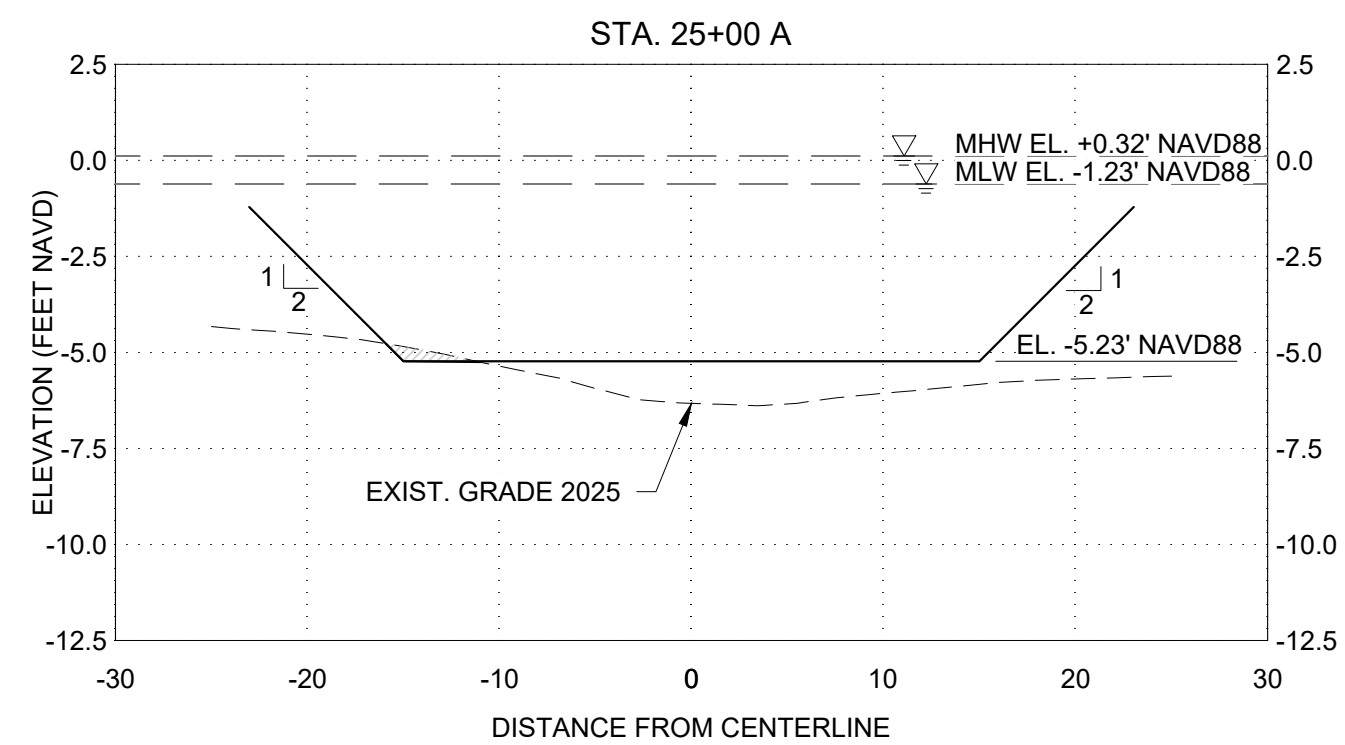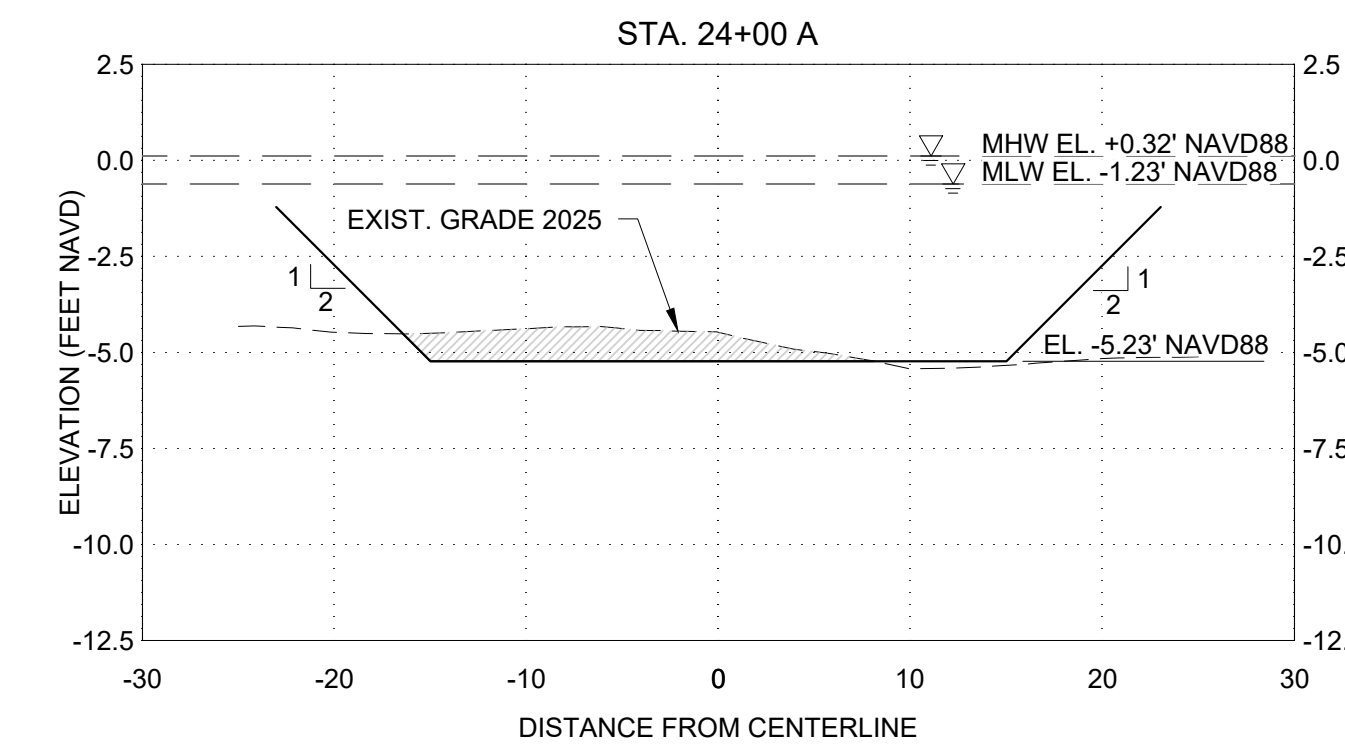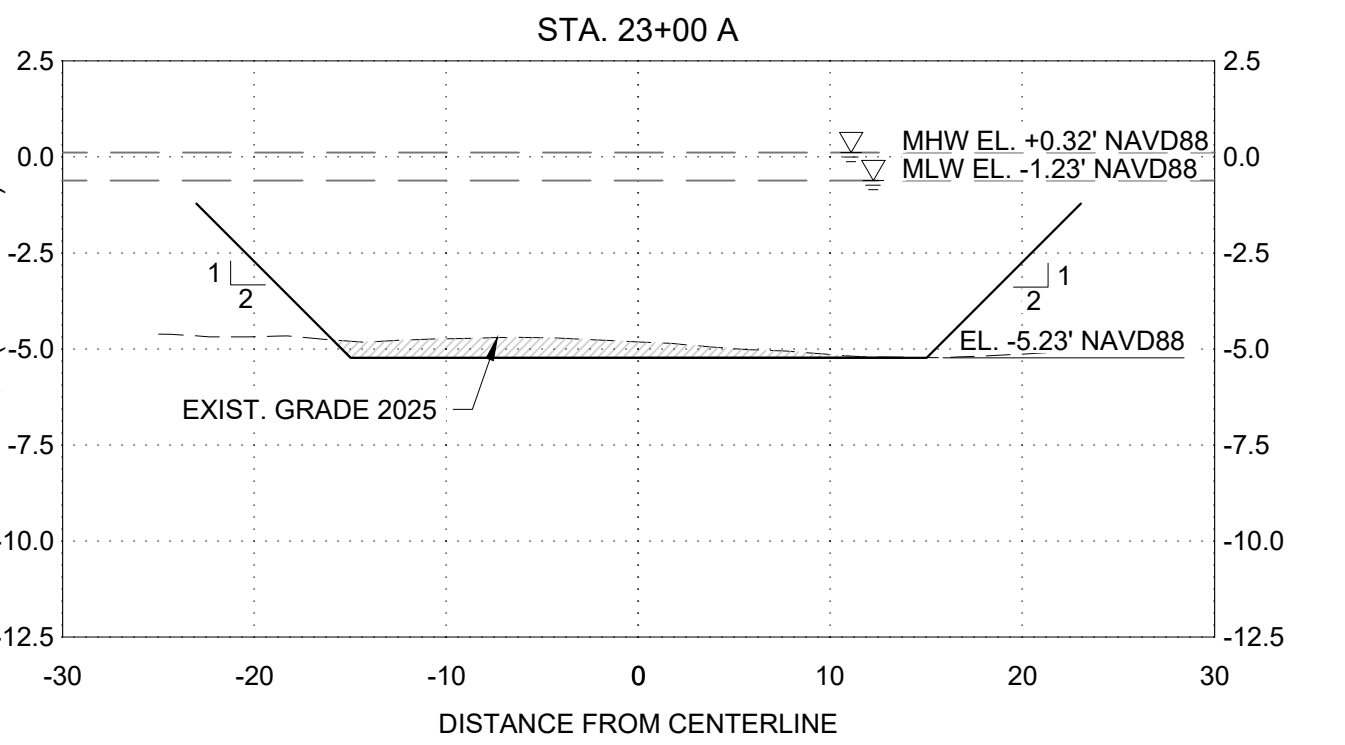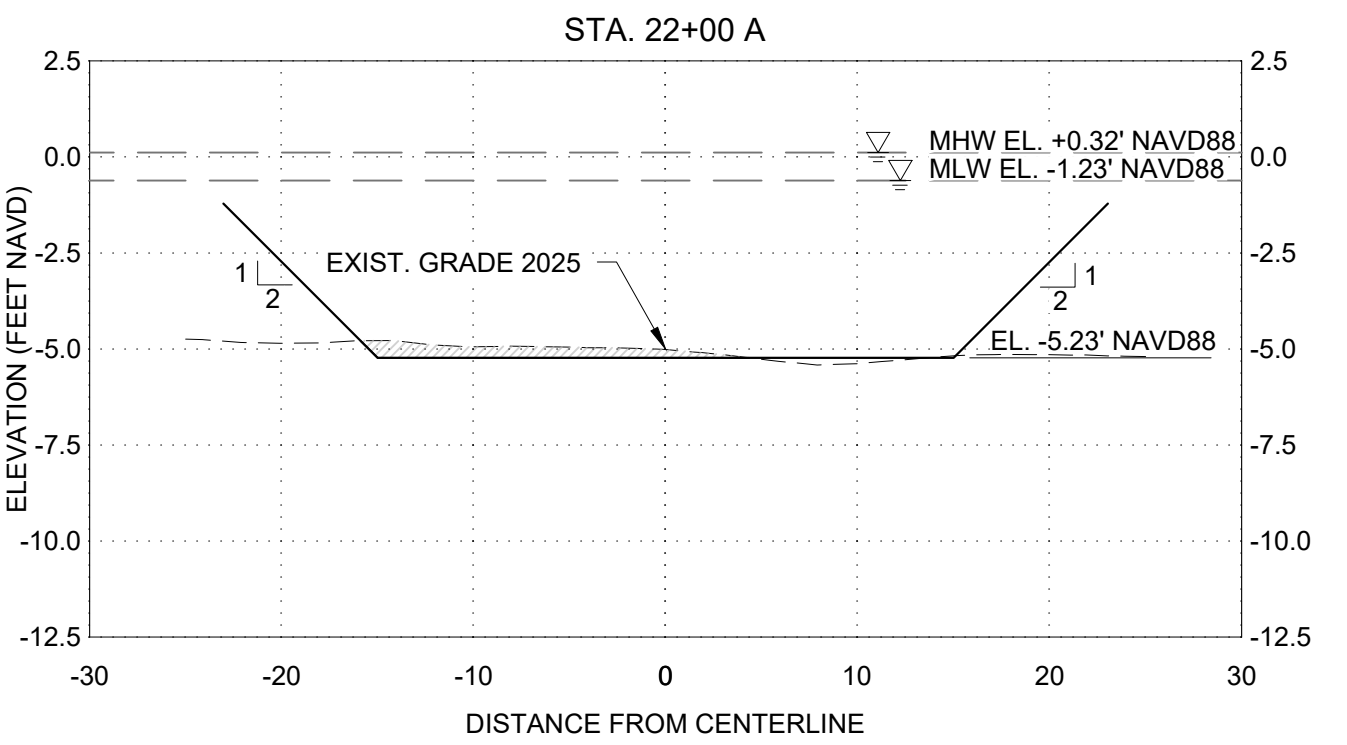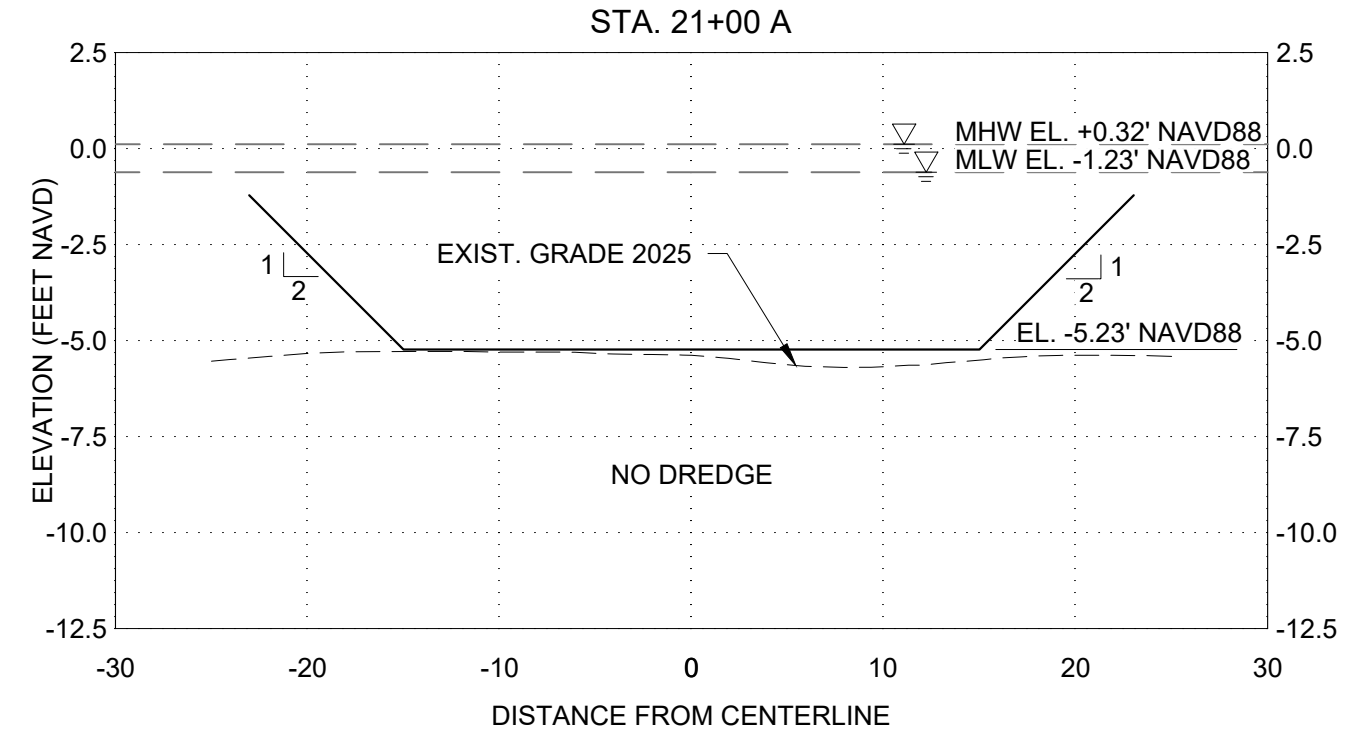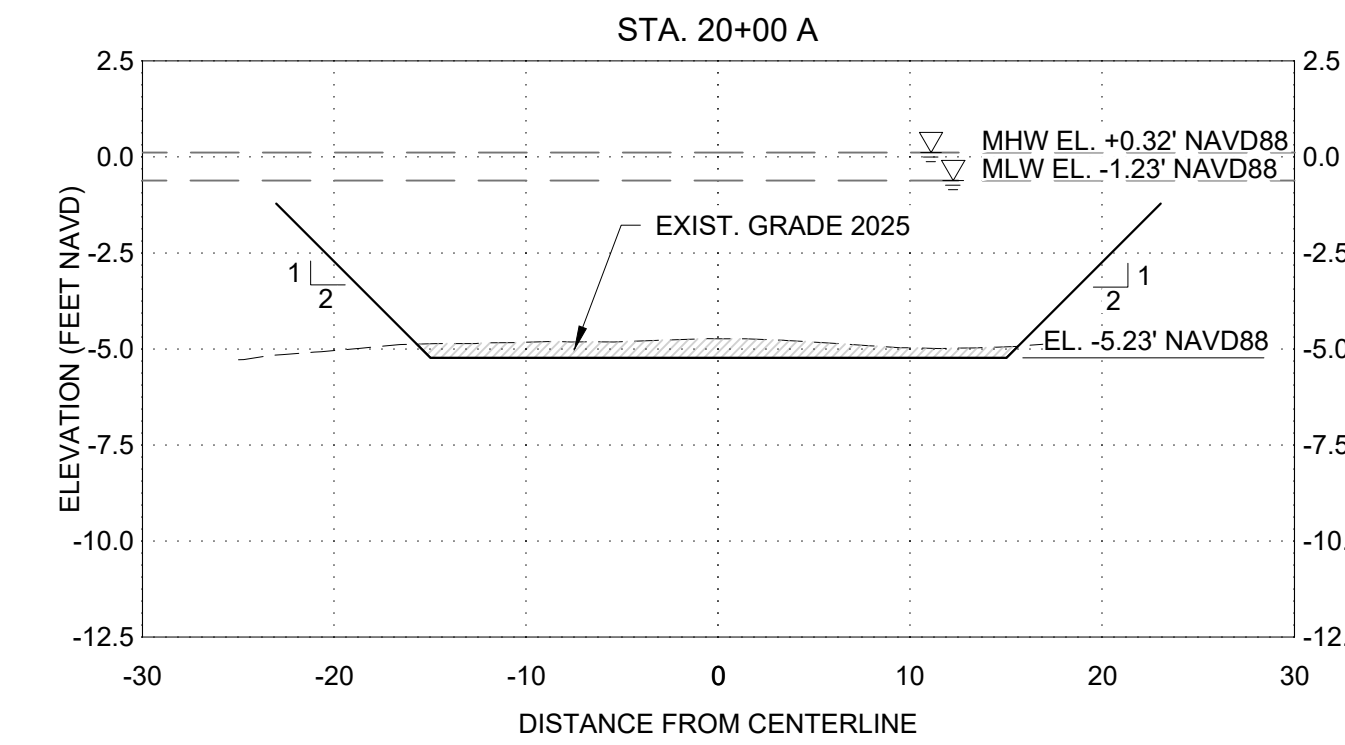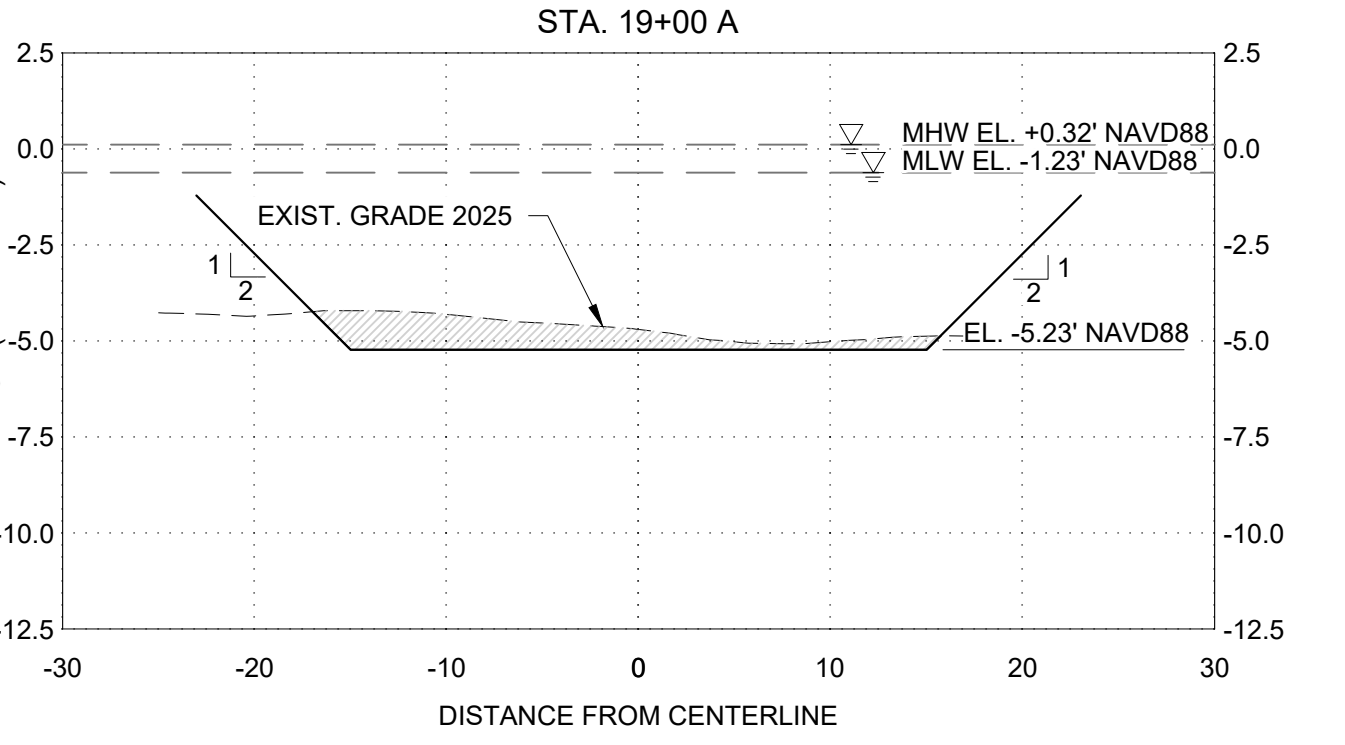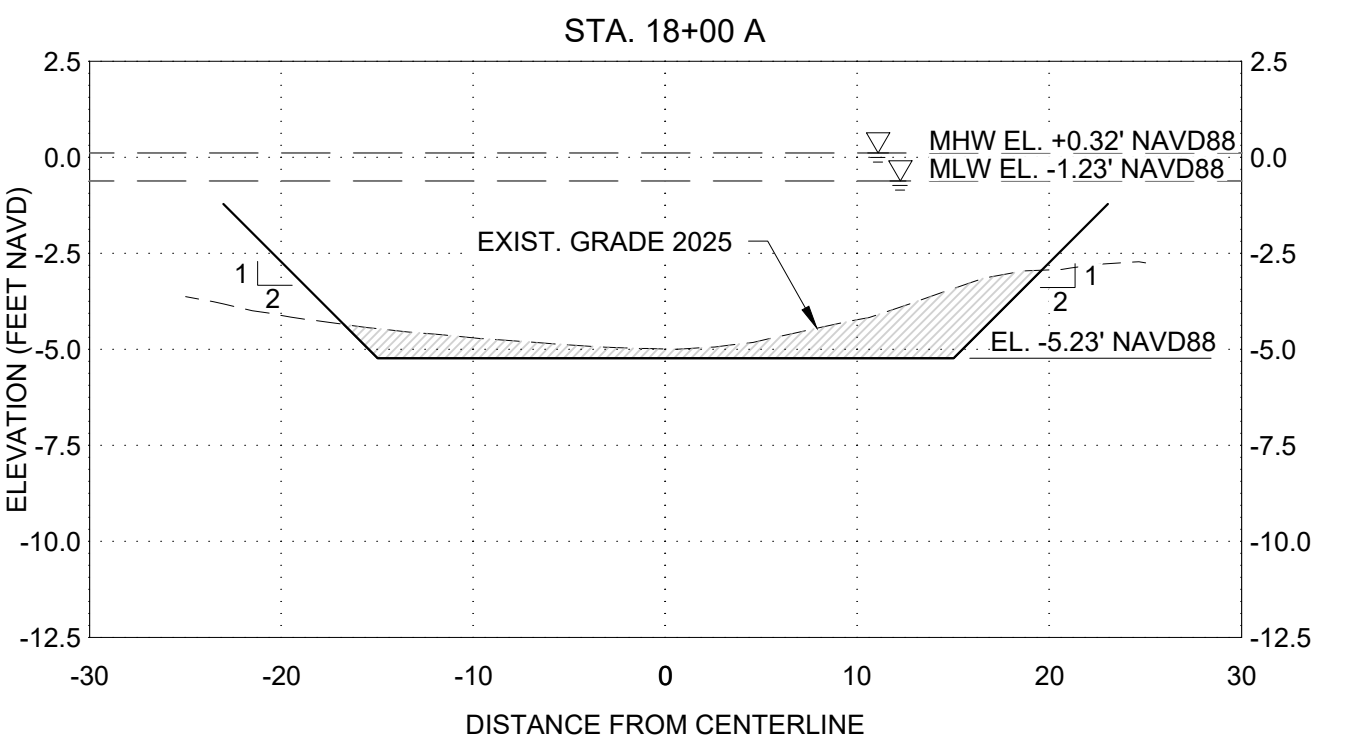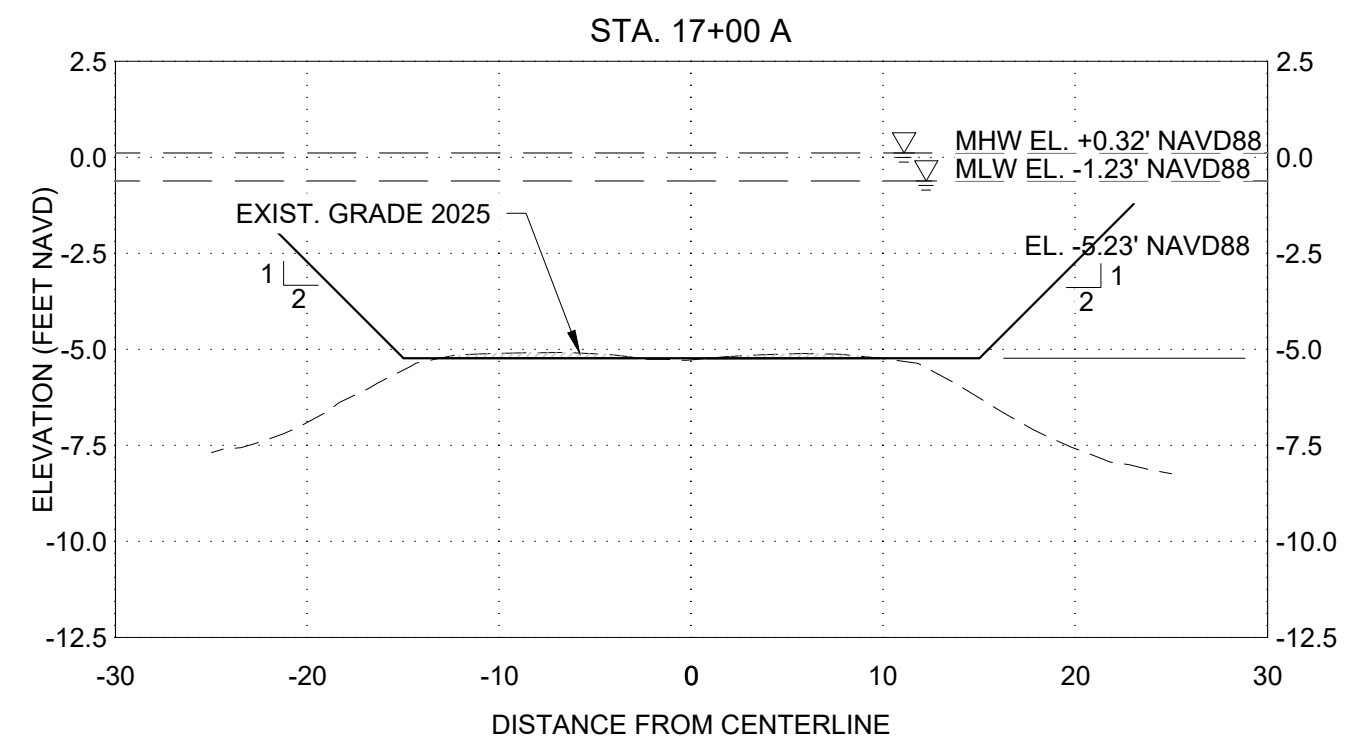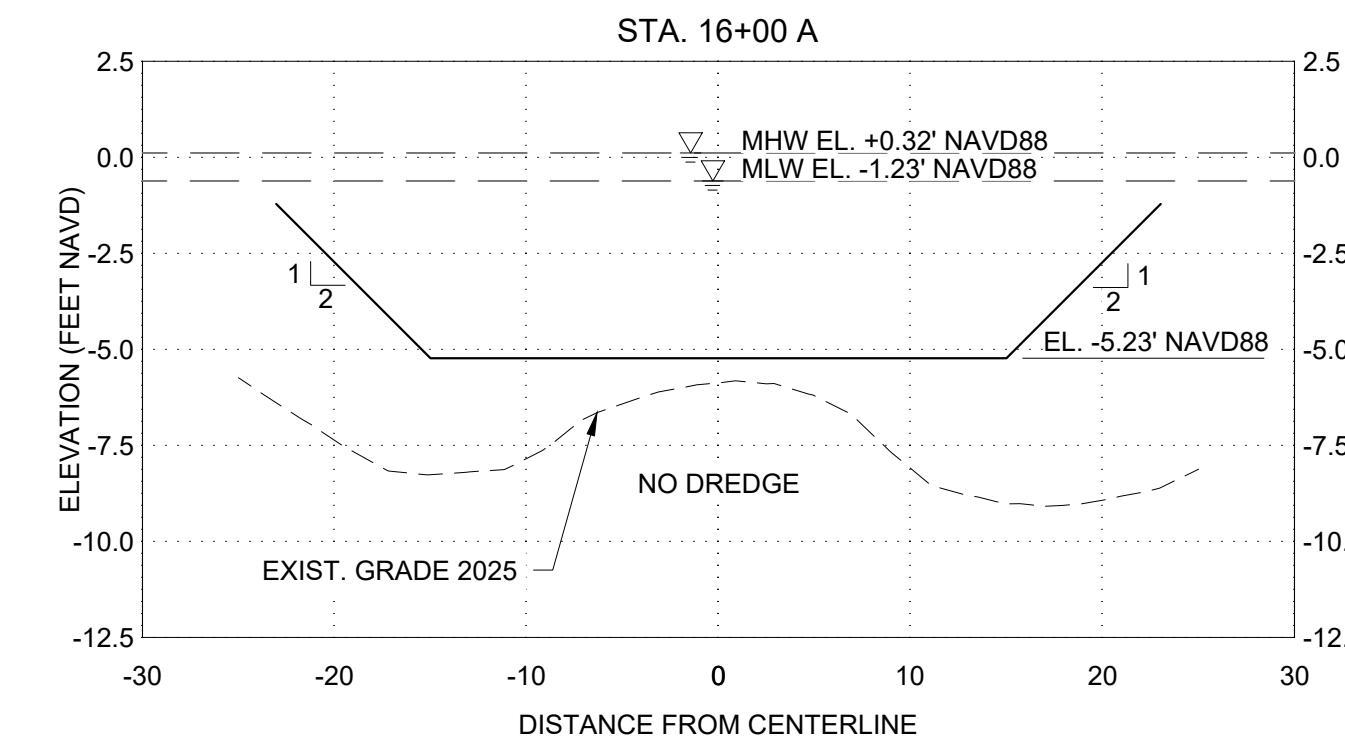

NOTE:
AREA SHOWN WITH SHOALING ARE BSAED ON THE DESIGN SURVEY
COMPILED BY SURVTECH SOLUTIONS DATED JANUARY 2025. THE
CONTRACTOR SHALL CONDUCT A PRE-DREDGE SURVEY TO DETERMINE
ACTUAL AREAS REQUIRING DREDGING.

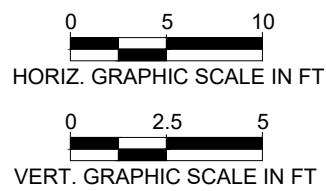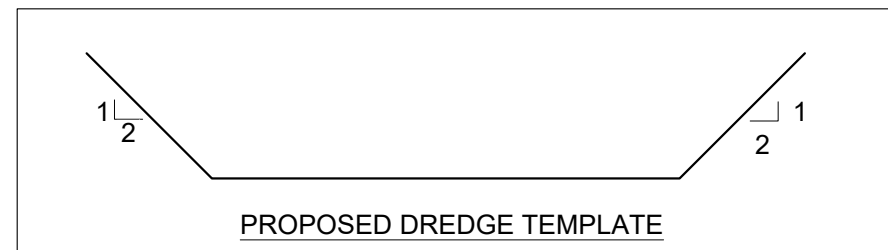

PROJECT:
PHILLIPPI CREEK
MAINTENANCE
DREDGING PROJECT

ADDRESS:

SARASOTA, FL

CLIENT:



ADDRESS:

200 E. MIAMI AVE.

VENICE, FL 34285

ENGINEER:

CUMMINS CEDERBERG

COASTAL & MARINE ENGINEERING

201 ALHAMBRA CIRCLE, SUITE 601

CORAL GABLES, FL 33134

TEL: +1 305 741-6155 FAX: +1 305-974-1969

WWW.CUMMINSCEDERBERG.COM

COA # 29062

CUMMINS | CEDERBERG

Coastal & Marine Engineering

PROJECT SPONSOR:



SARASOTA COUNTY PLANNING AND

DEVELOPMENT SERVICES,

ENVIRONMENTAL PROTECTION DIVISION

1001 SARASOTA CENTER BLVD

SARASOTA, FL 34240

SEAL:

CC PROJECT NO: 137125

DRAWN GK


CHECKED KF/JB

SCALE REFERS TO 22X34 SHEET



SHEET TITLE

CROSS SECTIONS
(2 OF 13)

CM-2.4

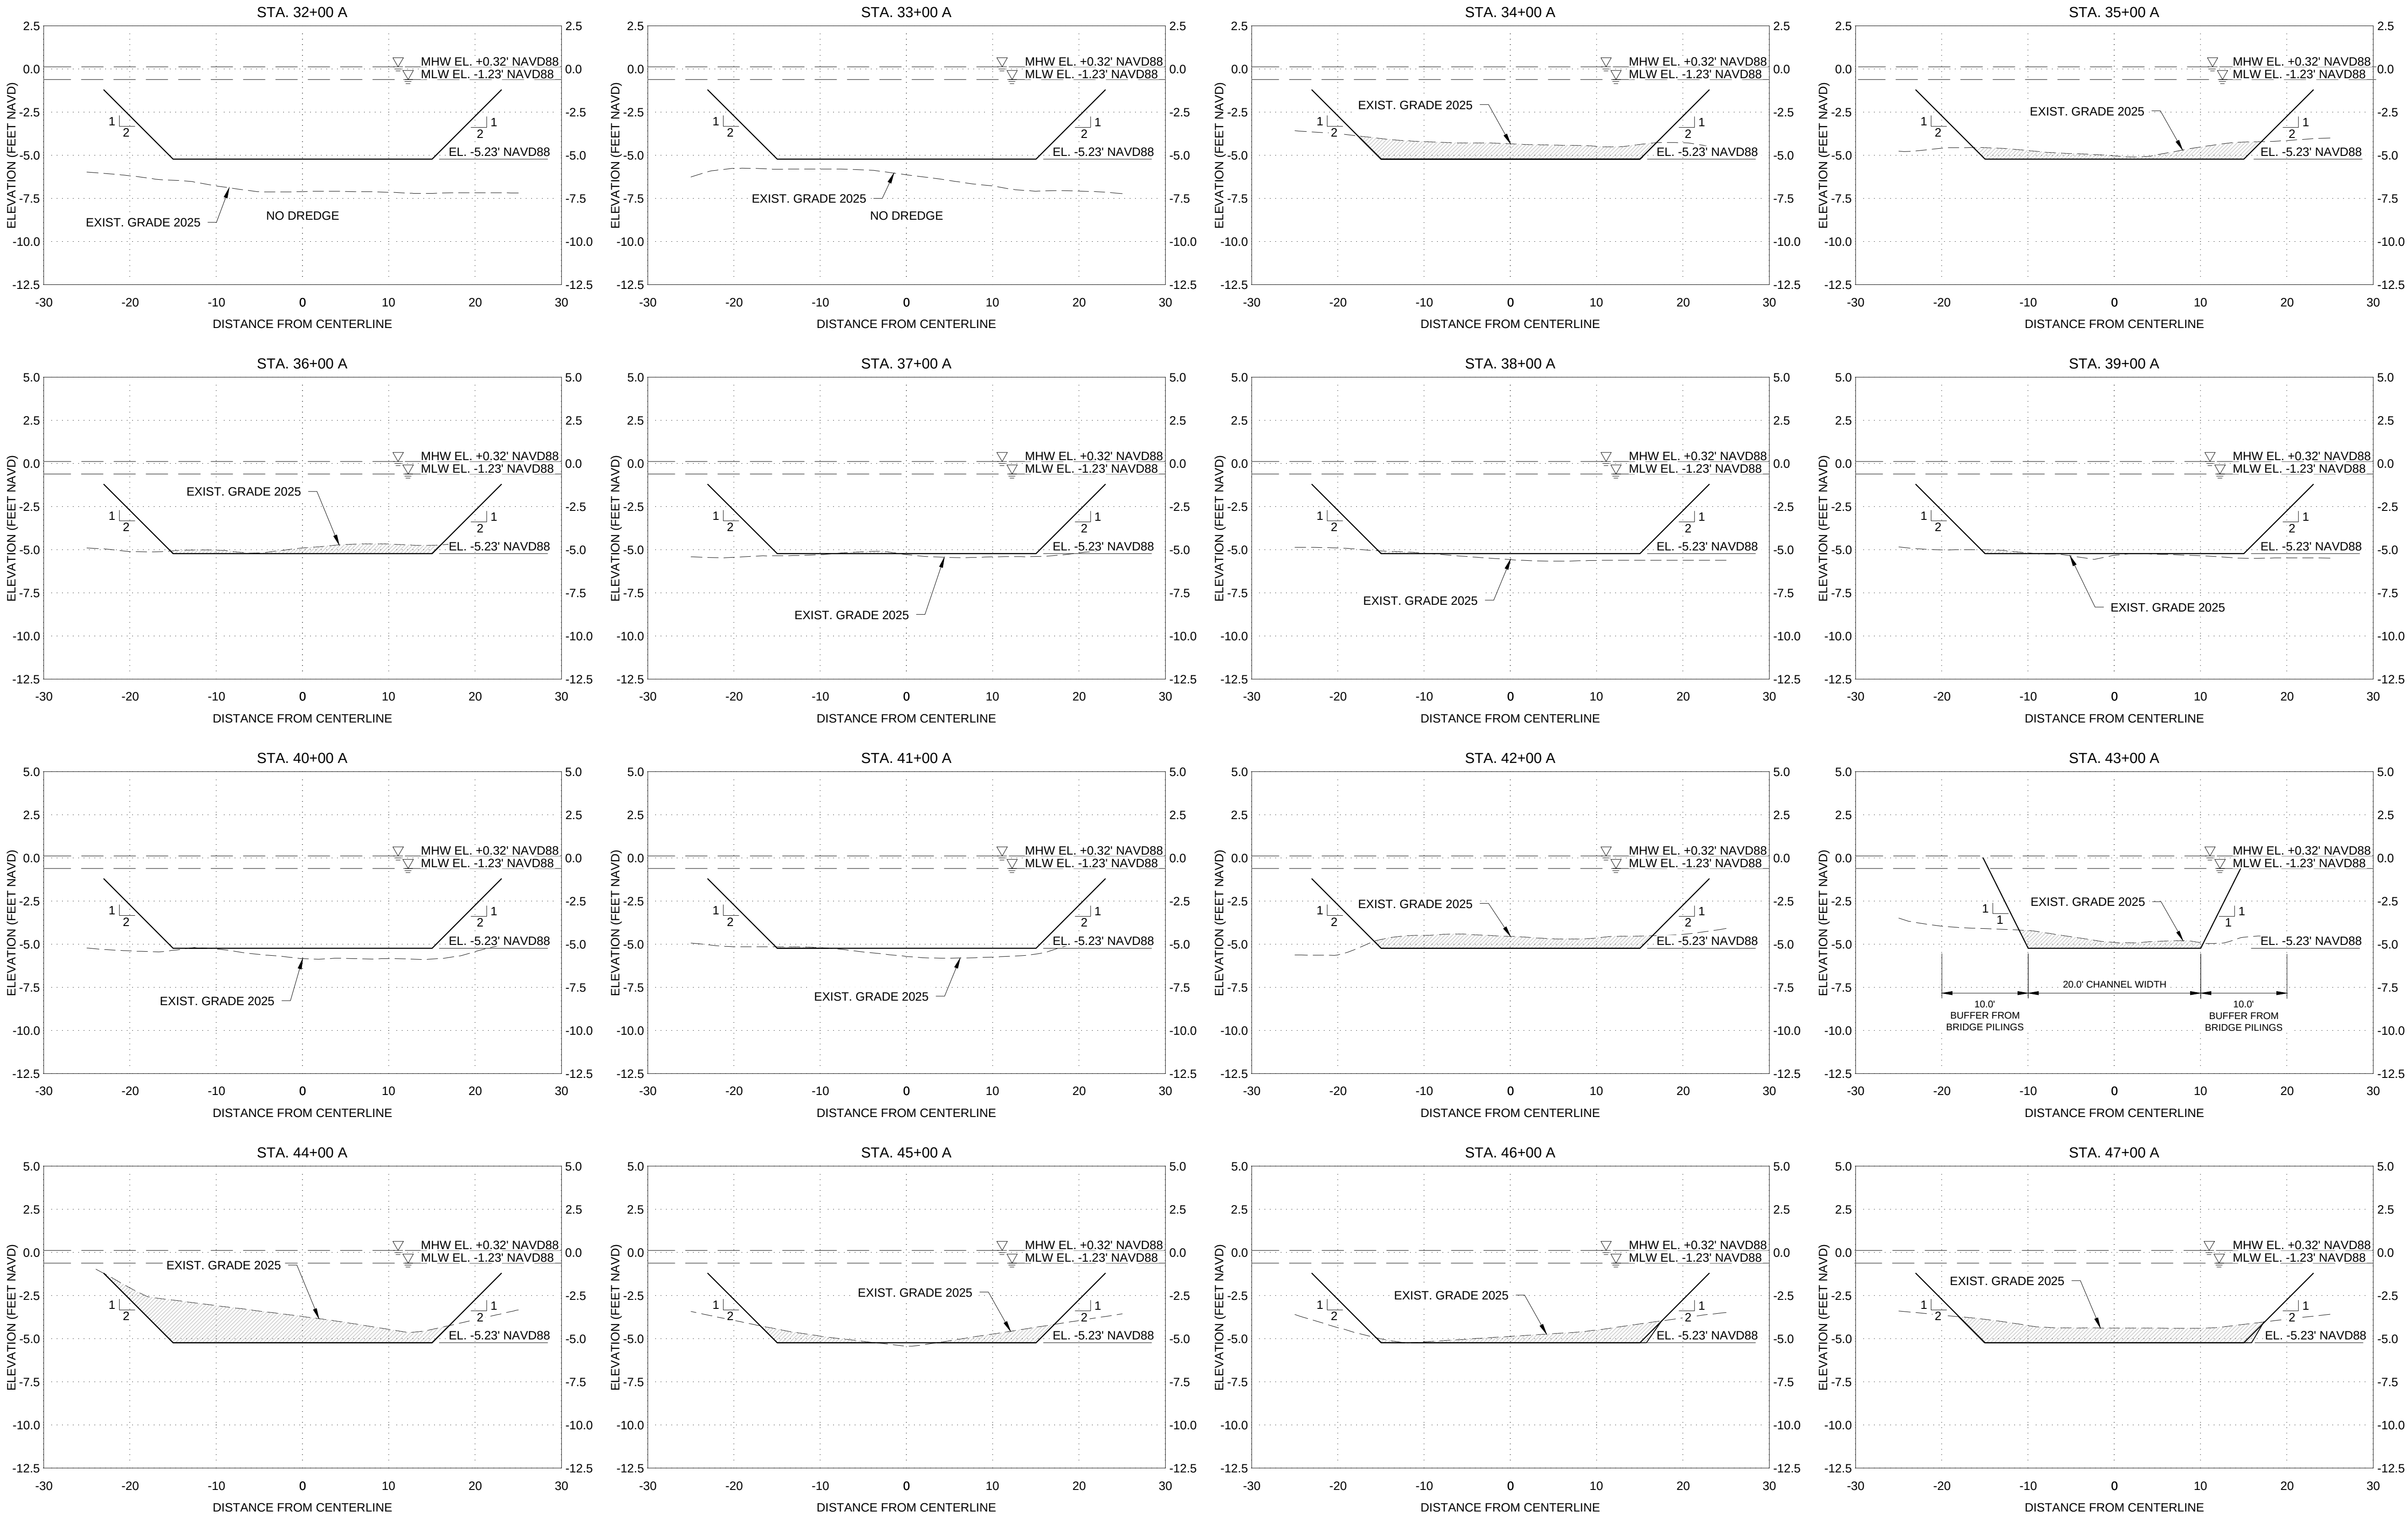

NOTE:
1. AREA SHOWN WITH SHOALING ARE BASED ON THE DESIGN SURVEY COMPLETED BY SURVTECH SOLUTIONS DATED JANUARY 2025. THE CONTRACTOR SHALL CONDUCT A PRE-DREDGE SURVEY TO DETERMINE ACTUAL AREAS REQUIRING DREDGING.
2. DREDGING TEMPLATE UNDER MONTE CARLO DR. BRIDGE IS RESTRICTED TO MAINTAIN 10 FT LATERAL BUFFERS FROM BRIDGE PILINGS. BUFFER IS MAINTAINED 10 FT UPSTREAM AND DOWNSTREAM FROM THE BRIDGE.

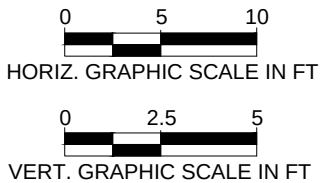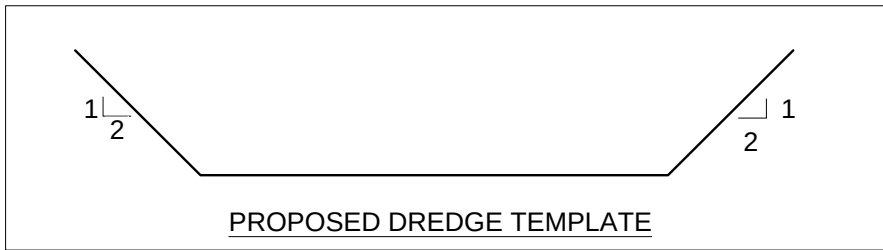

PROJECT:
PHILLIPPI CREEK
MAINTENANCE
DREDGING PROJECT

ADDRESS:

SARASOTA, FL

CLIENT:



ADDRESS:

200 E. MIAMI AVE.
VENICE, FL 34285

ENGINEER:

CUMMINS CEDERBERG
COASTAL & MARINE ENGINEERING
201 ALHAMBRA CIRCLE, SUITE 601
CORAL GABLES, FL 33134
TEL: +1 305 741-6155 FAX: +1 305-974-1969
WWW.CUMMINSCEDERBERG.COM
COA # 29062

CUMMINS | CEDERBERG
Coastal & Marine Engineering

PROJECT SPONSOR:



SARASOTA COUNTY PLANNING AND
DEVELOPMENT SERVICES,
ENVIRONMENTAL PROTECTION DIVISION
1001 SARASOTA CENTER BLVD
SARASOTA, FL 34240

SEAL:

										CONSTRUCTION DRAWINGS
										SUBMISSION / REVISION
										09/29/2025
										DATE
										1
										ISSUE

CC PROJECT NO: 137125

DRAWN GK

CHECKED KF/JB


SCALE REFERS TO 22X34 SHEET

SHEET TITLE



CROSS SECTIONS
(3 OF 13)

CM-2.5

C:\Users\glaysynak\Documents\WORK\1371250\2025-09-29\CM-2.6\137125 Phippii Dredge.dwg

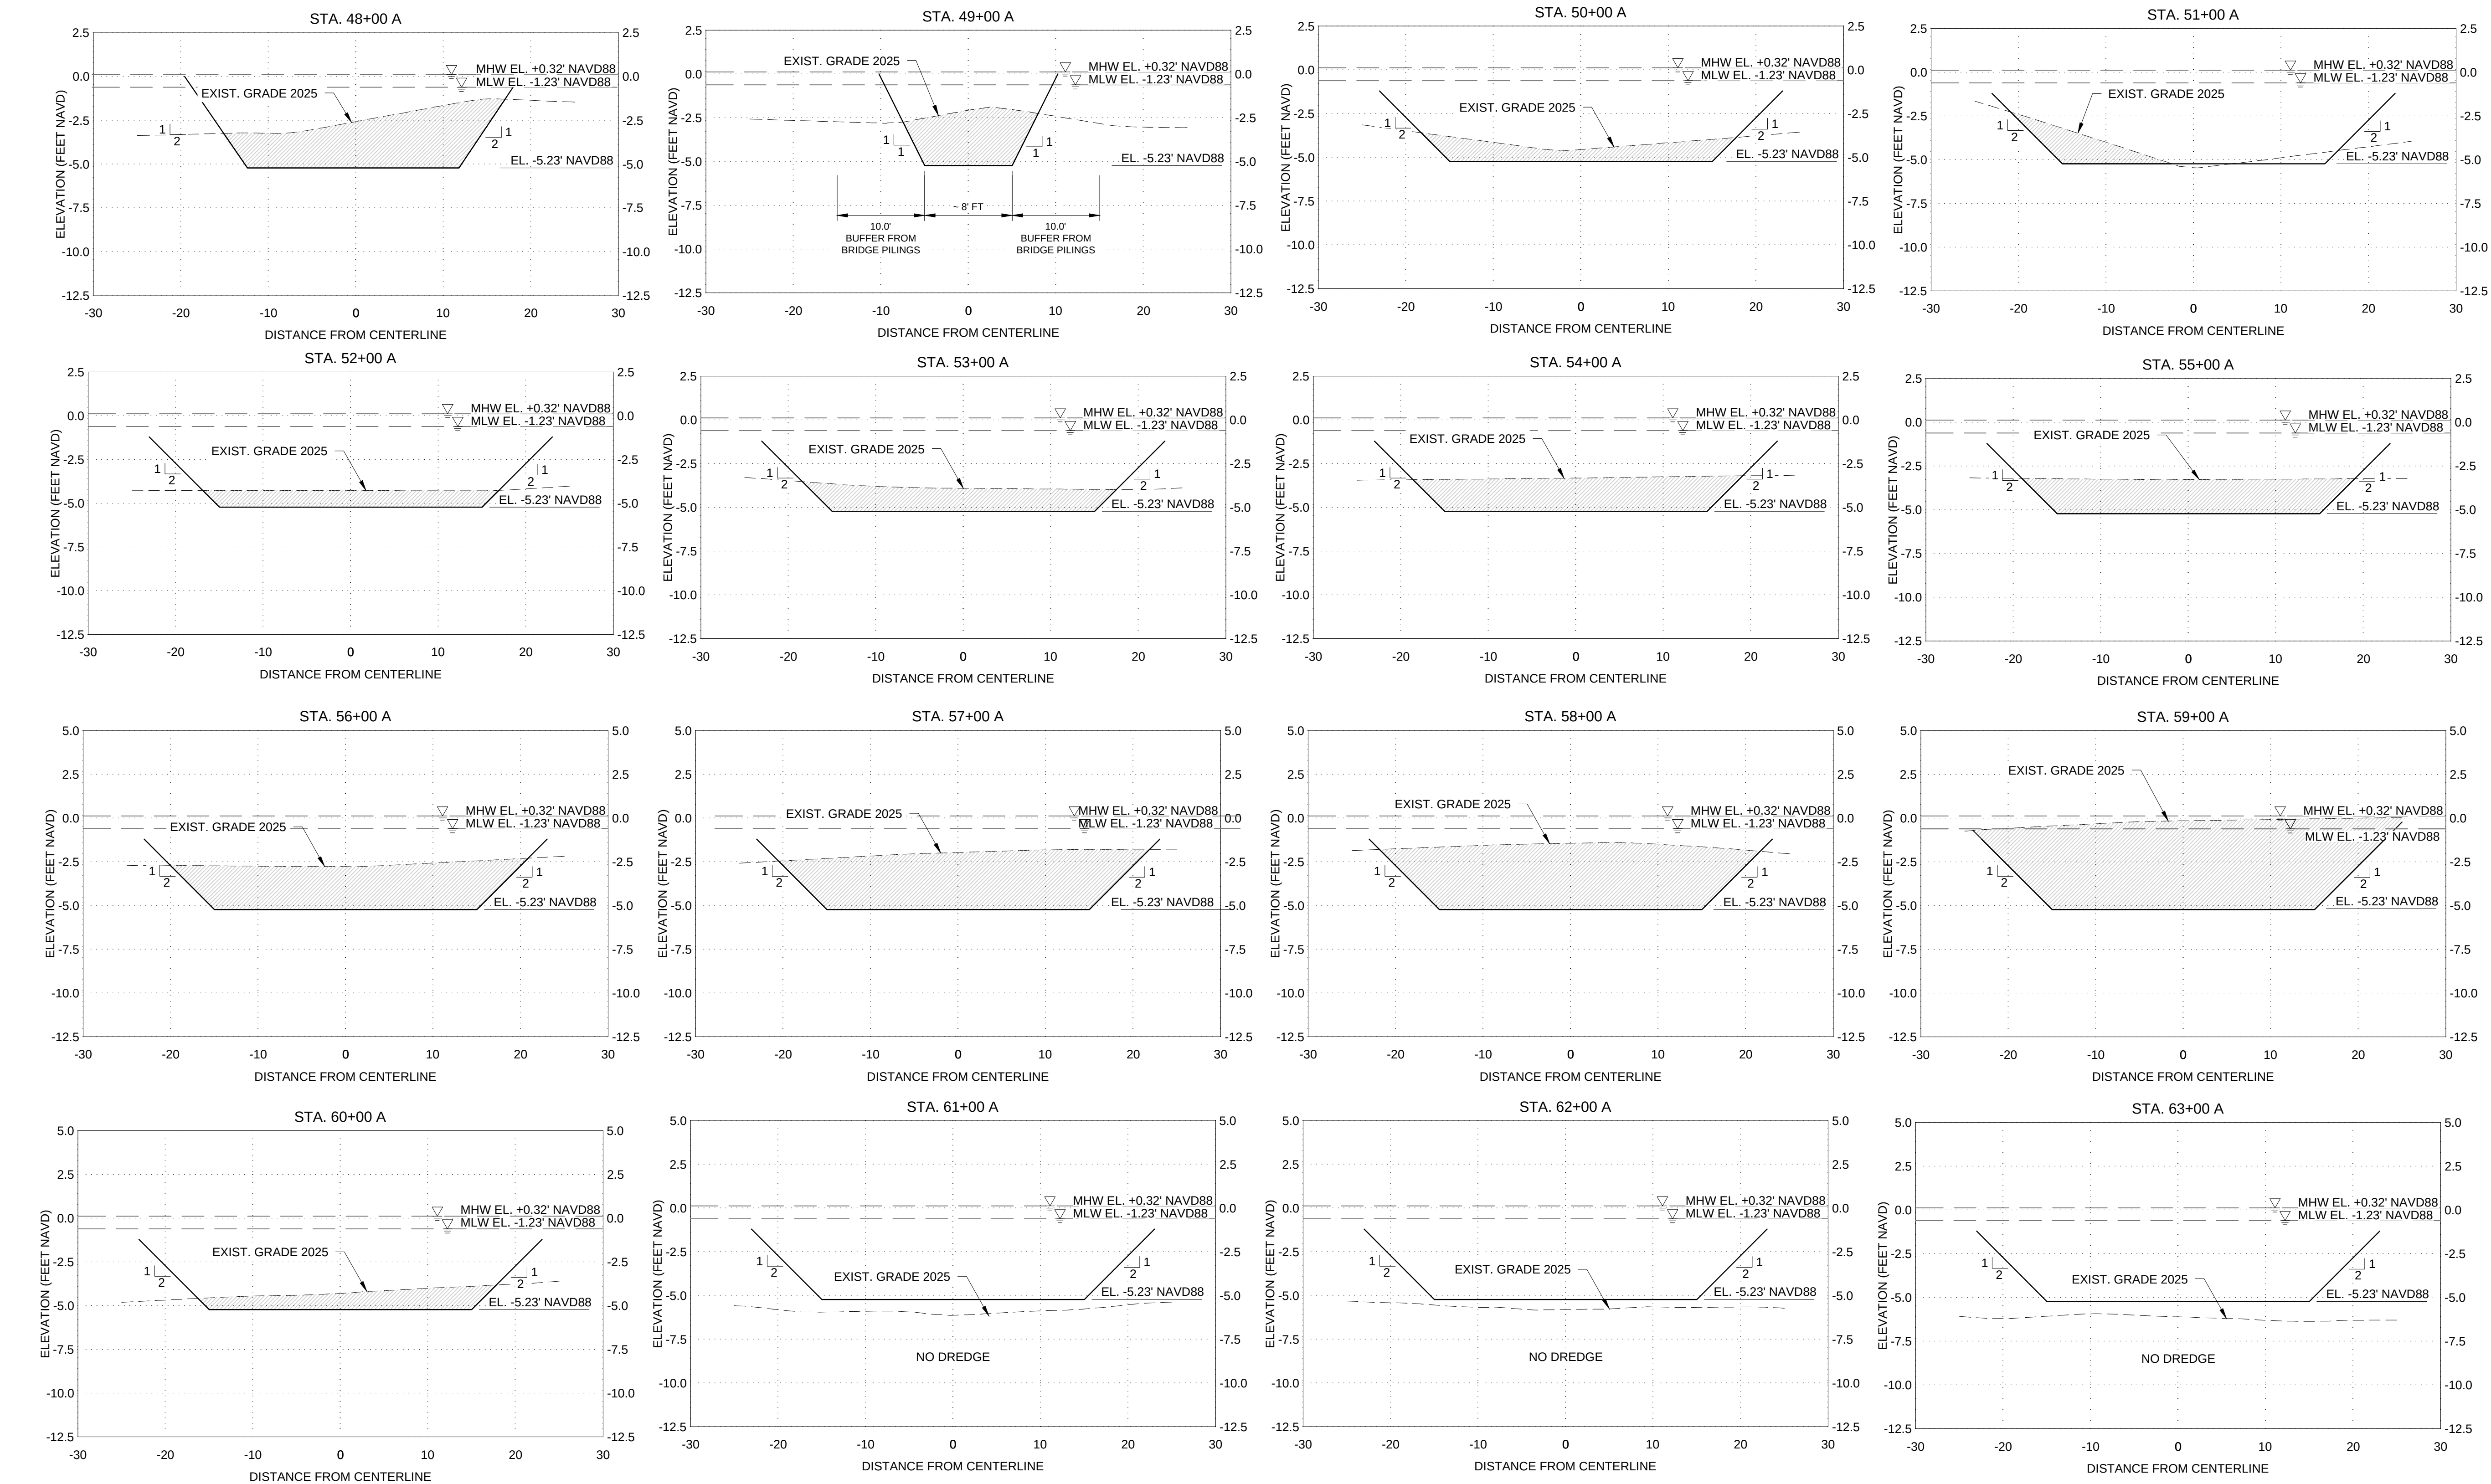

- NOTE:
- AREA SHOWN WITH SHOALING ARE BASED ON THE DESIGN SURVEY COMPLETED BY SURVTECH SOLUTIONS DATED JANUARY 2025. THE CONTRACTOR SHALL CONDUCT A PRE-DREDGE SURVEY TO DETERMINE ACTUAL AREAS REQUIRING DREDGING.
 - DREDGING TEMPLATE UNDER US-41 BRIDGE (BRIDGE NUMBER 170165) IS RESTRICTED TO MAINTAIN 10 FT LATERAL BUFFERS FROM BRIDGE PILINGS. BUFFER IS MAINTAINED 10 FT UPSTREAM AND DOWNSTREAM FROM THE BRIDGE.

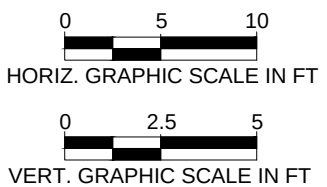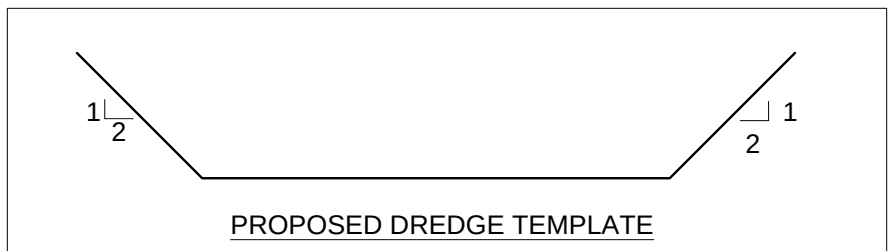

PROJECT:
PHILLIPPI CREEK
MAINTENANCE
DREDGING PROJECT

ADDRESS:
SARASOTA, FL

CLIENT:
 **WCIND**
West Coast Inland Navigation District

ADDRESS:
200 E. MIAMI AVE.
VENICE, FL 34285

ENGINEER:
CUMMINS CEDERBERG
COASTAL & MARINE ENGINEERING
201 ALHAMBRA CIRCLE, SUITE 601
CORAL GABLES, FL 33134
TEL: +1 305 741-6155 FAX: +1 305-974-1969
WWW.CUMMINSCEDERBERG.COM
COA # 29062

CUMMINS | CEDERBERG
Coastal & Marine Engineering

PROJECT SPONSOR:
 **Sarasota County**
SARASOTA COUNTY PLANNING AND
DEVELOPMENT SERVICES,
ENVIRONMENTAL PROTECTION DIVISION
1001 SARASOTA CENTER BLVD
SARASOTA, FL 34240


SEAL:

CONSTRUCTION DRAWINGS	SUBMISSION / REVISION	DATE	ISSUE
		09/29/2025	1



CC PROJECT NO: 137125
DRAWN GK
CHECKED KF/JB
SCALE REFERS TO 22X34 SHEET

SHEET TITLE
**CROSS SECTIONS
(4 OF 13)**

CM-2.6

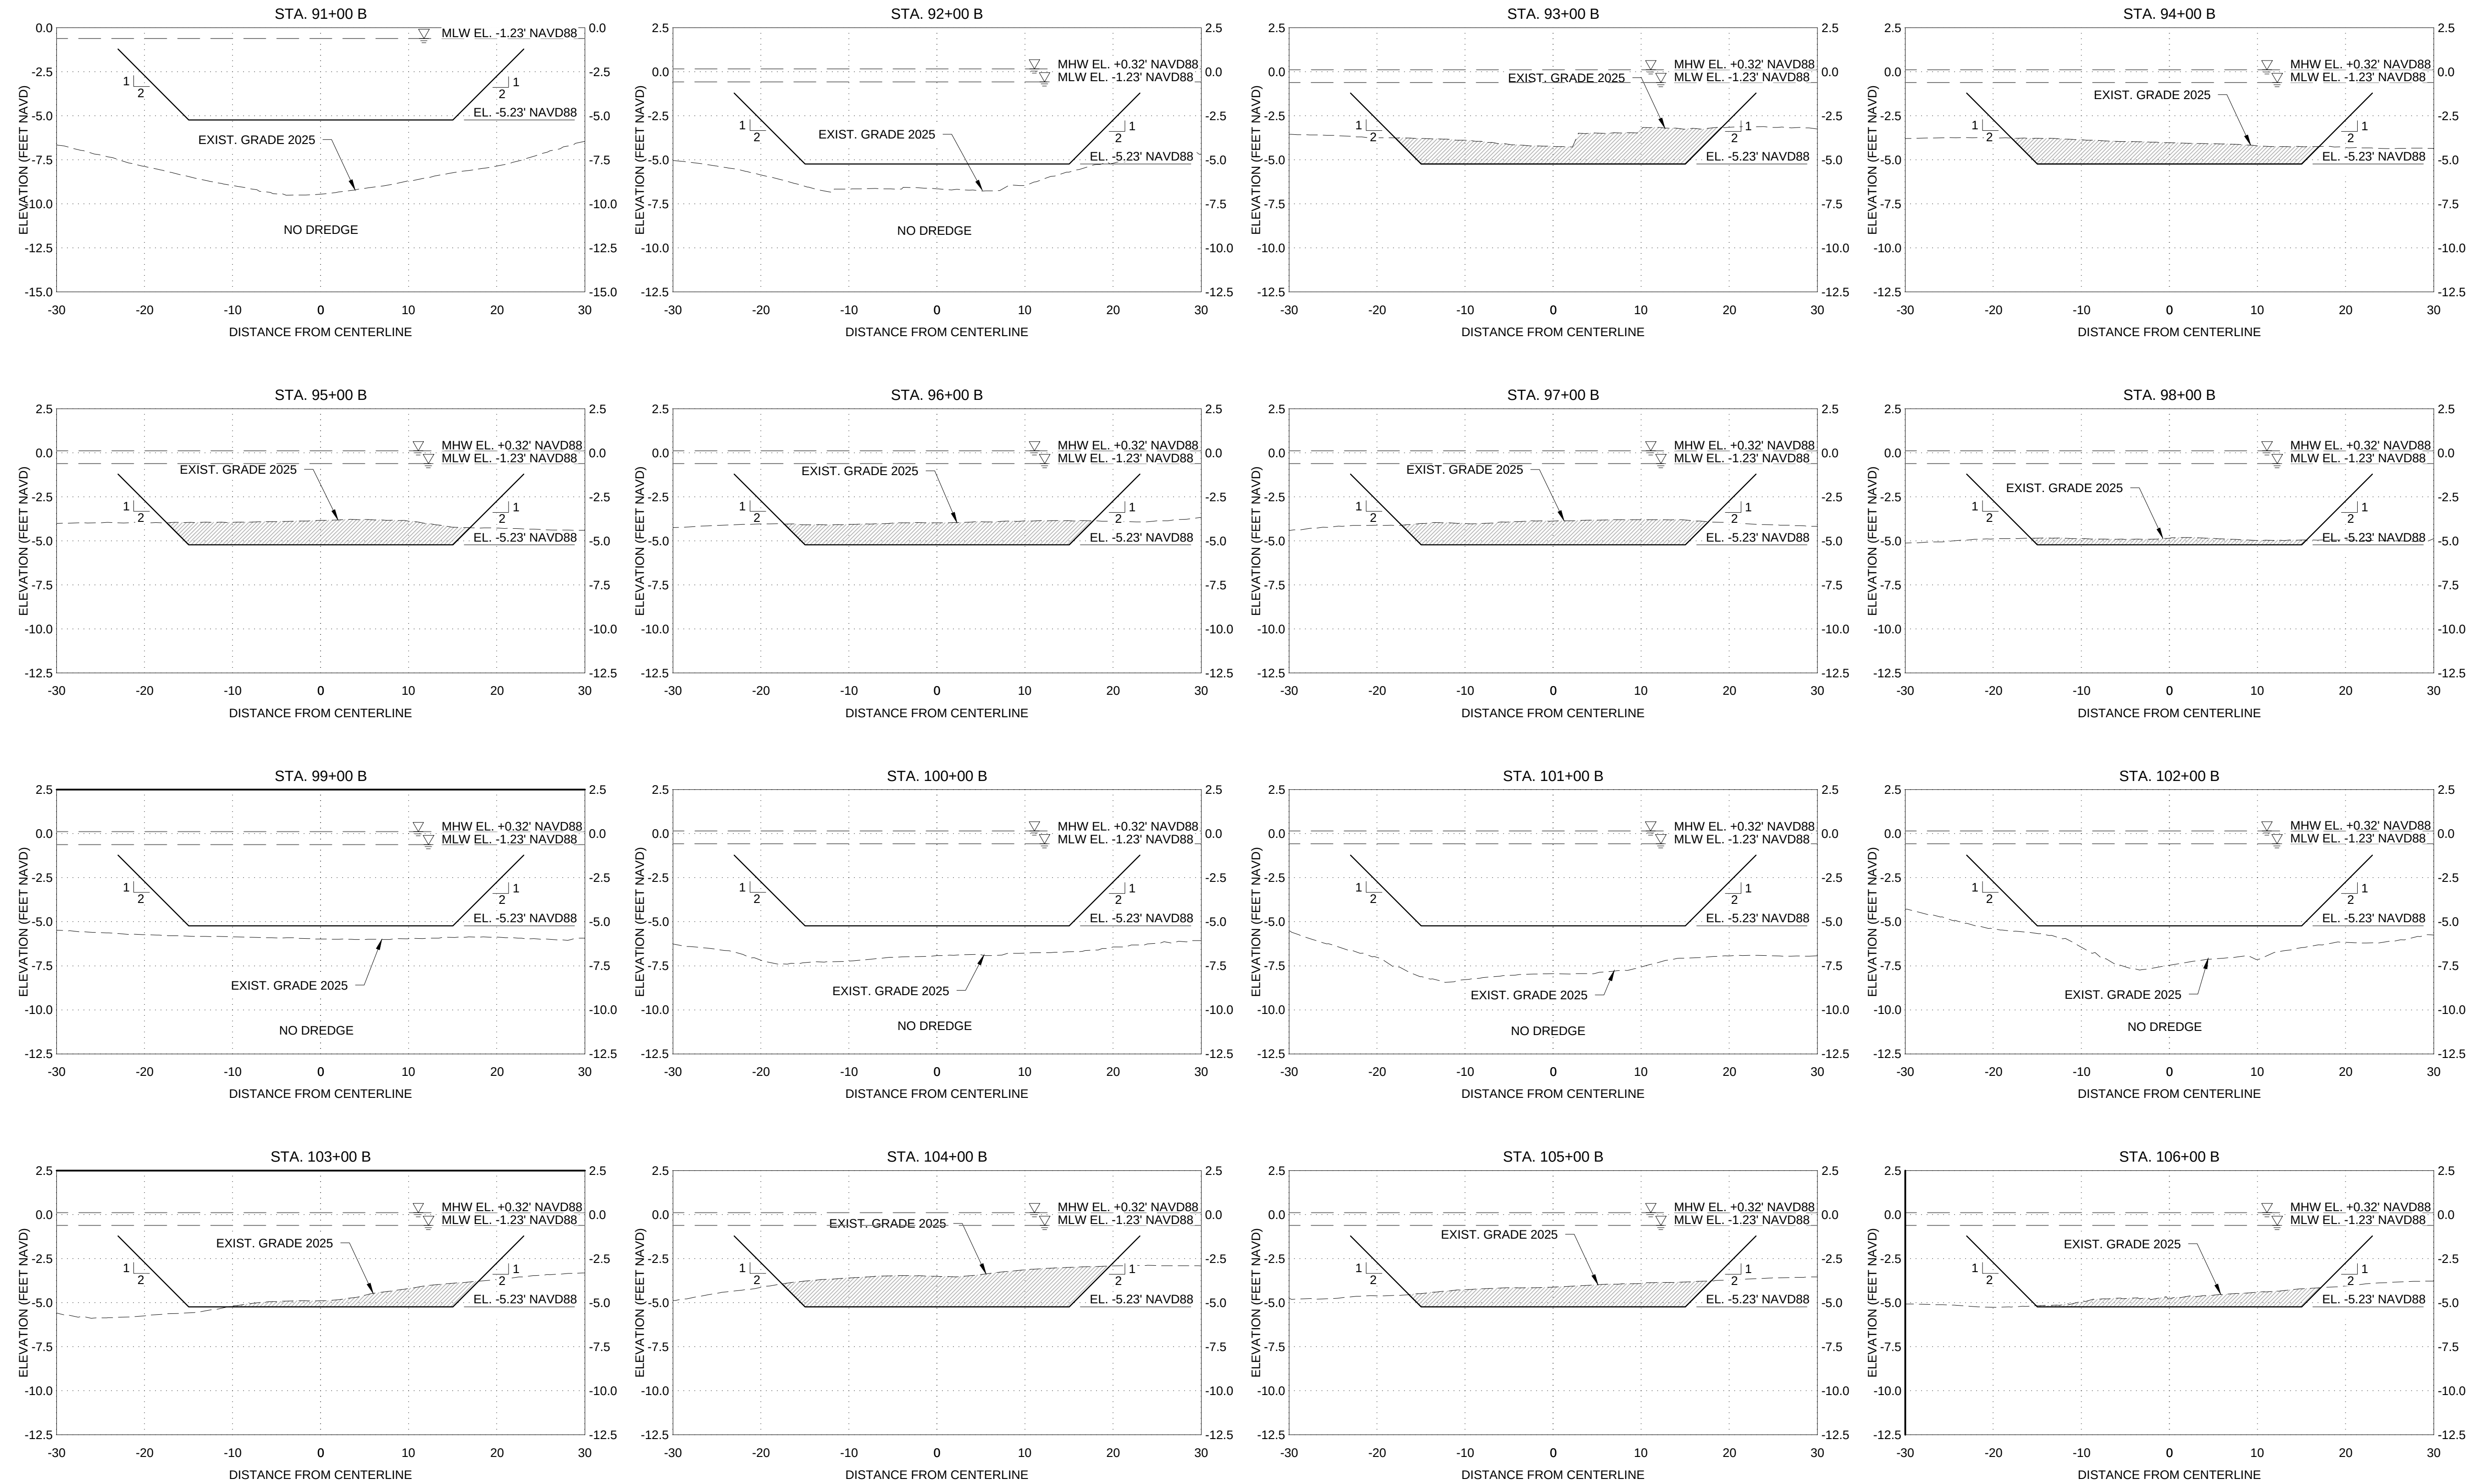

NOTE:
AREA SHOWN WITH SHOALING ARE BSAED ON THE DESIGN SURVEY
COMPLTED BY SURVTECH SOLUTIONS DATED JANUARY 2025. THE
CONTRACTOR SHALL CONDUCT A PRE-DREDGE SURVEY TO DETERMINE
ACTUAL AREAS REQUIRING DREDGING.

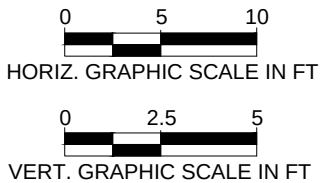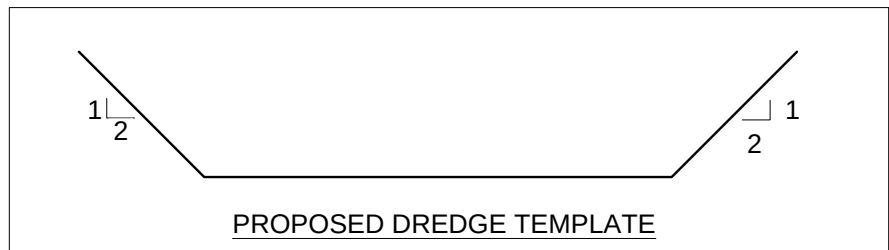

PROJECT:
PHILLIPPI CREEK
MAINTENANCE
DREDGING PROJECT

ADDRESS:

SARASOTA, FL

CLIENT:



ADDRESS:

200 E. MIAMI AVE.
VENICE, FL 34285

ENGINEER:

CUMMINS CEDERBERG

COASTAL & MARINE ENGINEERING

201 ALHAMBRA CIRCLE, SUITE 601

CORAL GABLES, FL 33134

TEL: +1 305 741-6155 FAX: +1 305-974-1969

WWW.CUMMINSCEDERBERG.COM

COA # 29062

CUMMINS | CEDERBERG

Coastal & Marine Engineering

PROJECT SPONSOR:



SARASOTA COUNTY PLANNING AND
DEVELOPMENT SERVICES,

ENVIRONMENTAL PROTECTION DIVISION

1001 SARASOTA CENTER BLVD

SARASOTA, FL 34240

SEAL:

CONSTRUCTION DRAWINGS	SUBMISSION / REVISION	DATE	ISSUE
		09/29/2025	1

CC PROJECT NO: 137125

DRAWN GK

CHECKED KF/JB


SCALE REFERS TO 22X34 SHEET

SHEET TITLE

CROSS SECTIONS
(7 OF 13)

CM-2.9

C:\Users\glorys\Documents\WORK\1371250\2025-09-29\1371250 PHILLIP CREEK DREDGE EXTEN.dwg

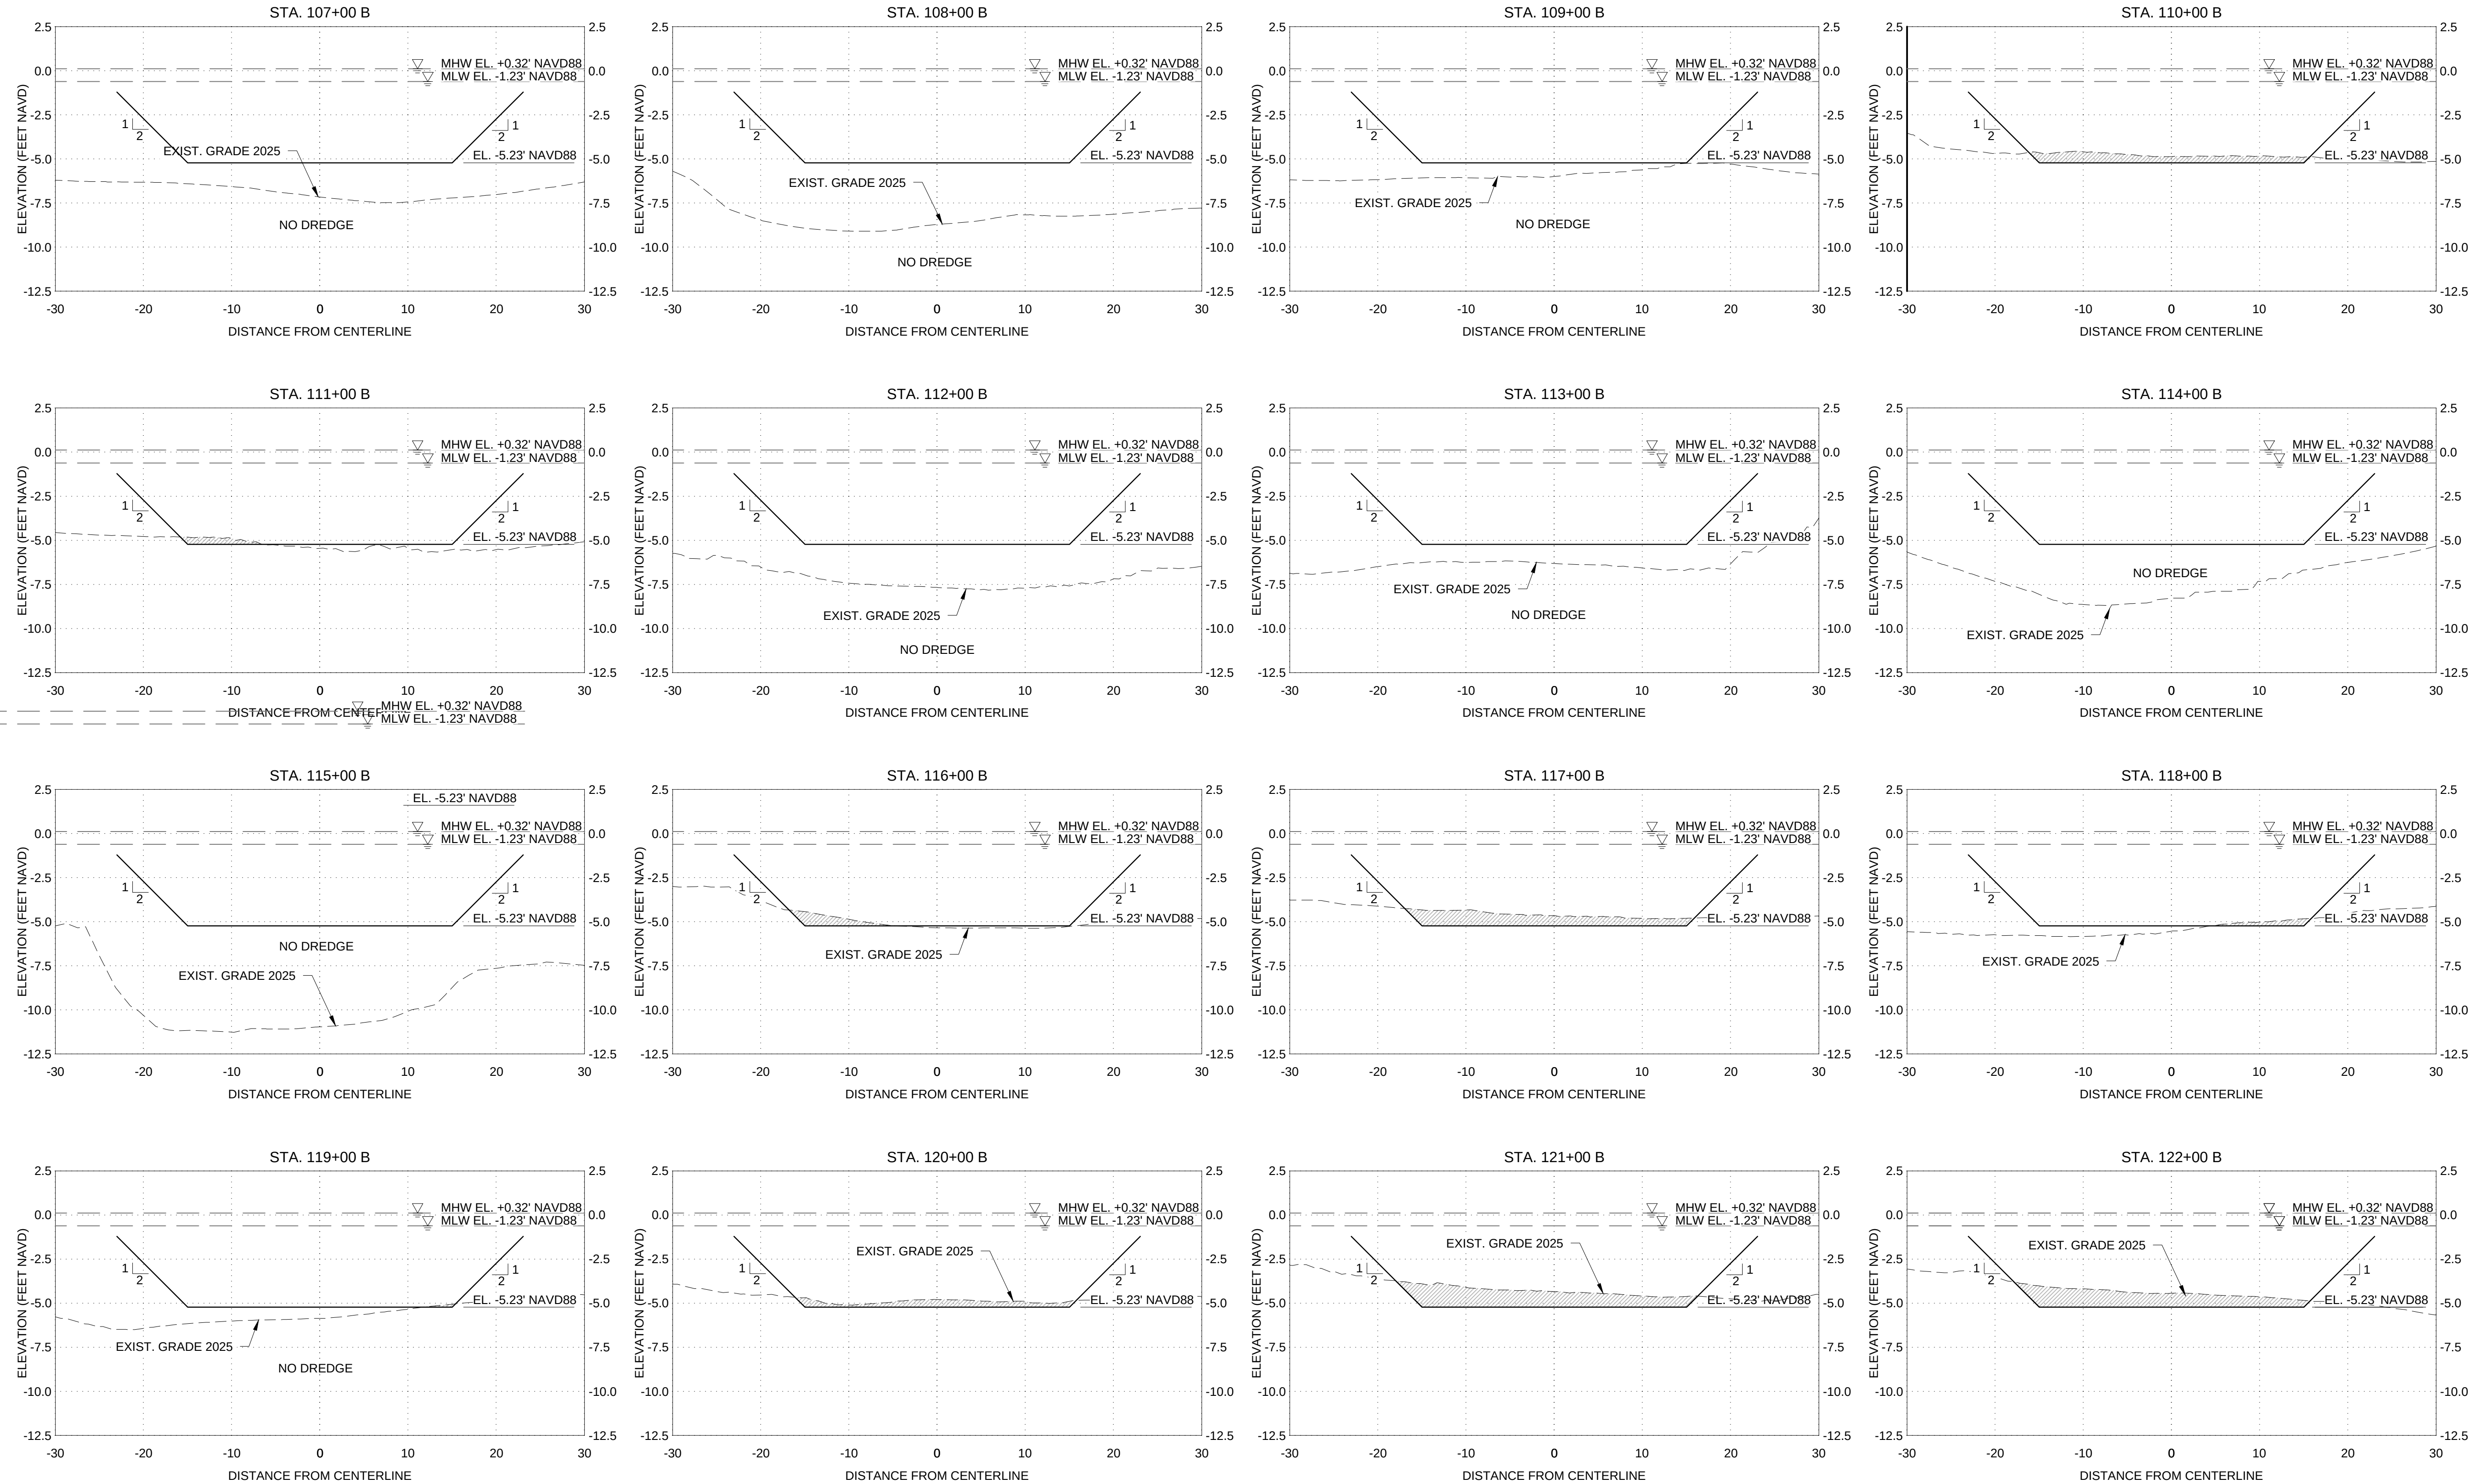

PROJECT:
PHILLIPPI CREEK
MAINTENANCE
DREDGING PROJECT

ADDRESS:

SARASOTA, FL

CLIENT:



ADDRESS:

200 E. MIAMI AVE.
VENICE, FL 34285

ENGINEER:

CUMMINS CEDERBERG
COASTAL & MARINE ENGINEERING

201 ALHAMBRA CIRCLE, SUITE 601
CORAL GABLES, FL 33134
TEL: +1 305 741-6155 FAX: +1 305-974-1969
WWW.CUMMINSCEDERBERG.COM
COA # 29062

CUMMINS | CEDERBERG

Coastal & Marine Engineering

PROJECT SPONSOR:



SARASOTA COUNTY PLANNING AND
DEVELOPMENT SERVICES,
ENVIRONMENTAL PROTECTION DIVISION
1001 SARASOTA CENTER BLVD
SARASOTA, FL 34240

SEAL:

										CONSTRUCTION DRAWINGS
										SUBMISSION / REVISION
										09/29/2025
										DATE
										1
										ISSUE

CC PROJECT NO: 137125

DRAWN GK

CHECKED KF/JB


SCALE REFERS TO 22X34 SHEET

SHEET TITLE

CROSS SECTIONS
(8 OF 13)

















CM-2.10

SARASOTA COUNTY PLANNING AND
DEVELOPMENT SERVICES,
ENVIRONMENTAL PROTECTION DIVISION
1001 SARASOTA CENTER BLVD
SARASOTA, FL 34240


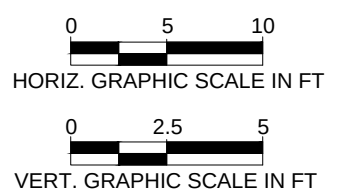


NOTE:
AREA SHOWN WITH SHOALING ARE BSAED ON THE DESIGN SURVEY
COMPLTED BY SURVTECH SOLUTIONS DATED JANUARY 2025. THE
CONTRACTOR SHALL CONDUCT A PRE-DREDGE SURVEY TO DETERMINE
ACTUAL AREAS REQUIRING DREDGING.

CM-2.11

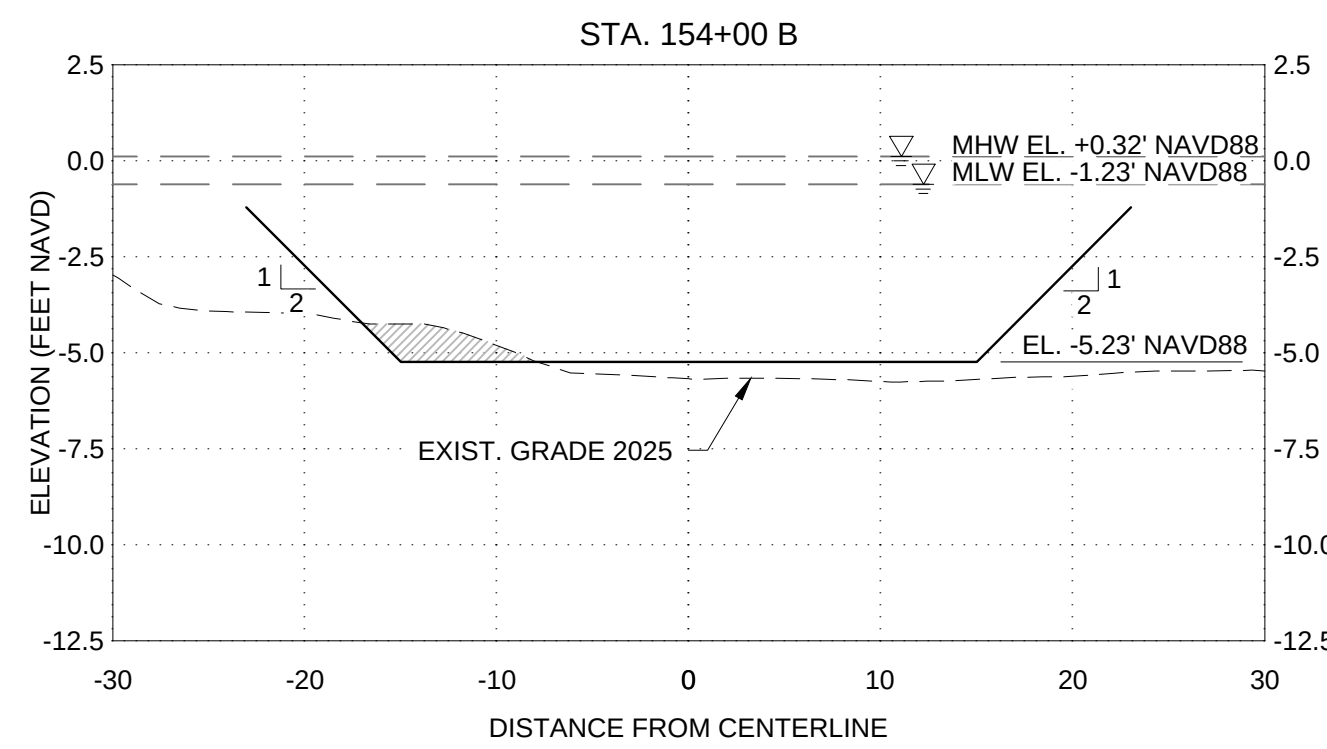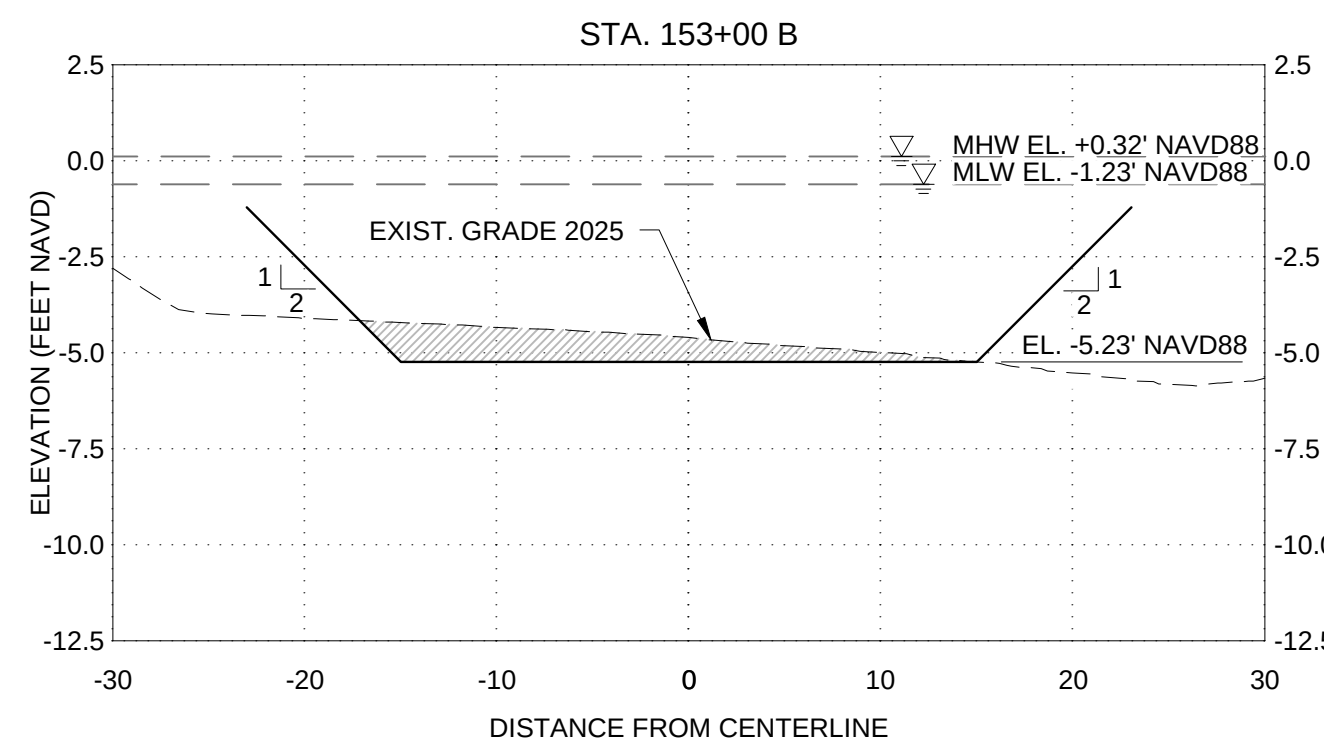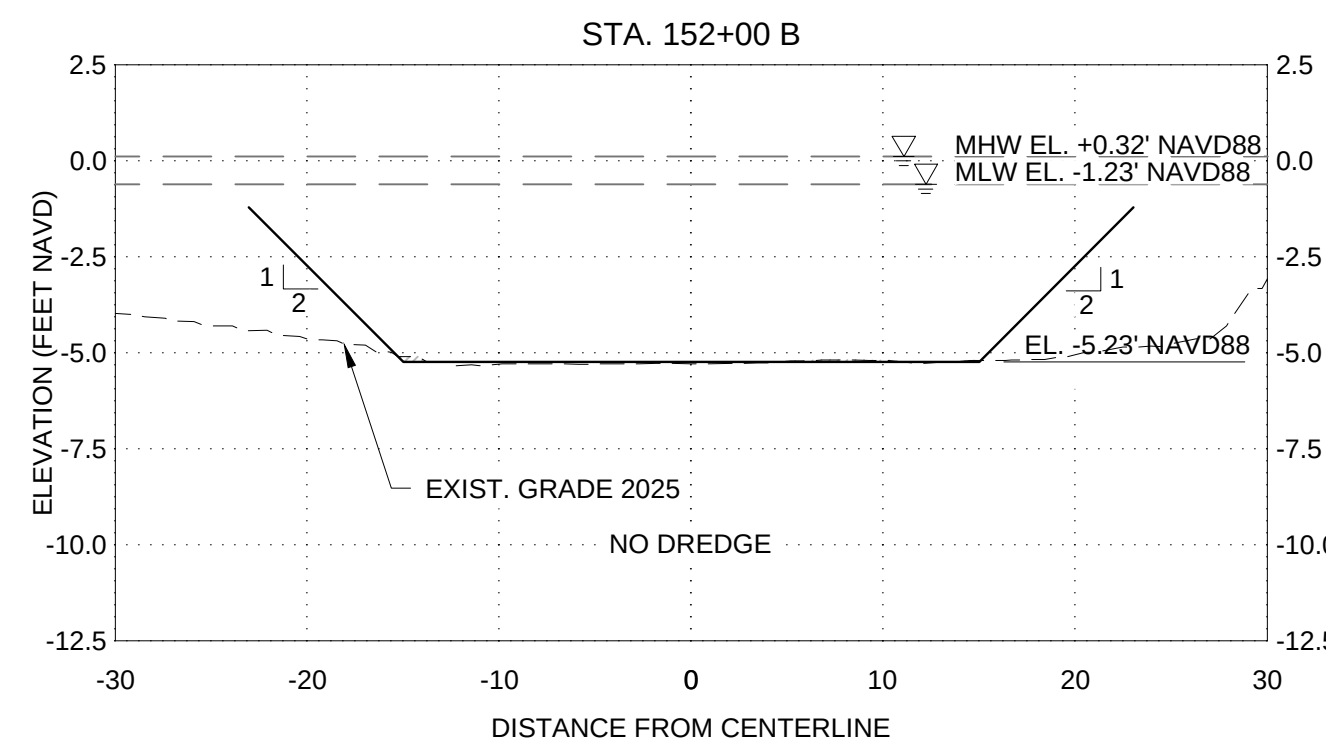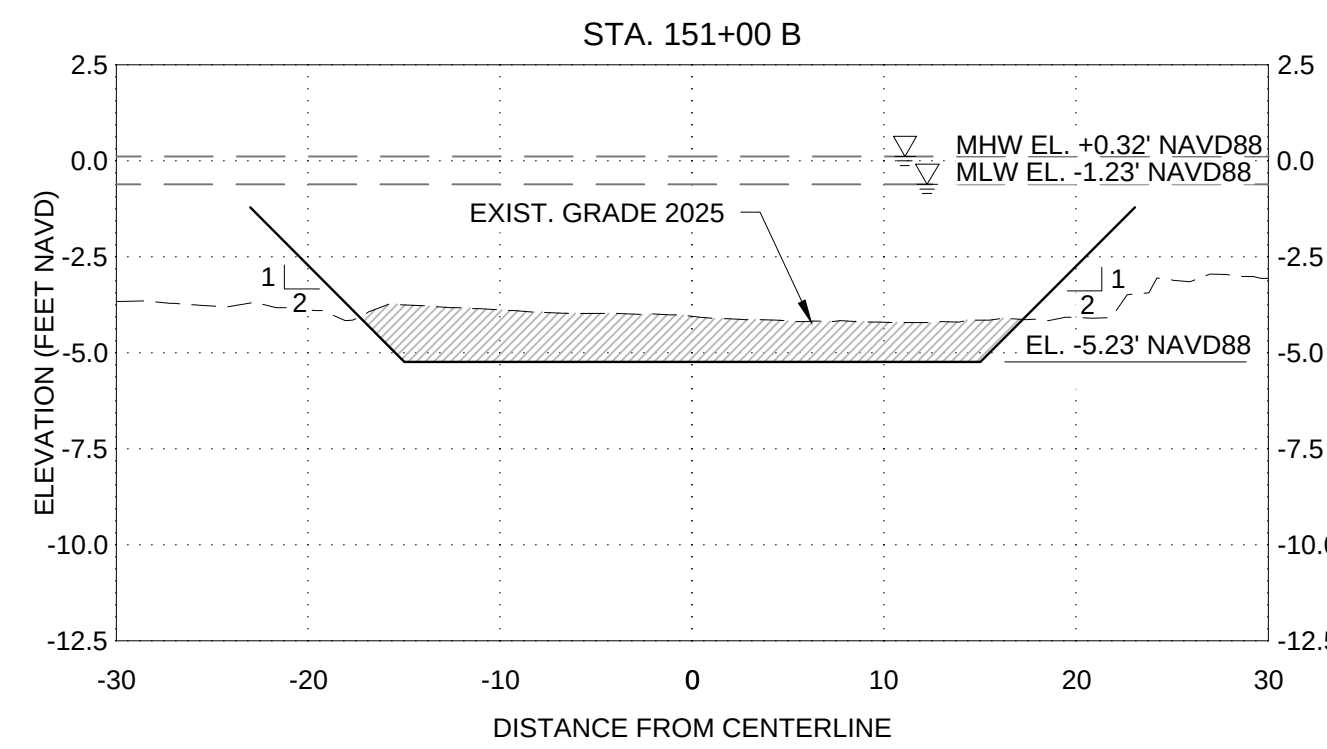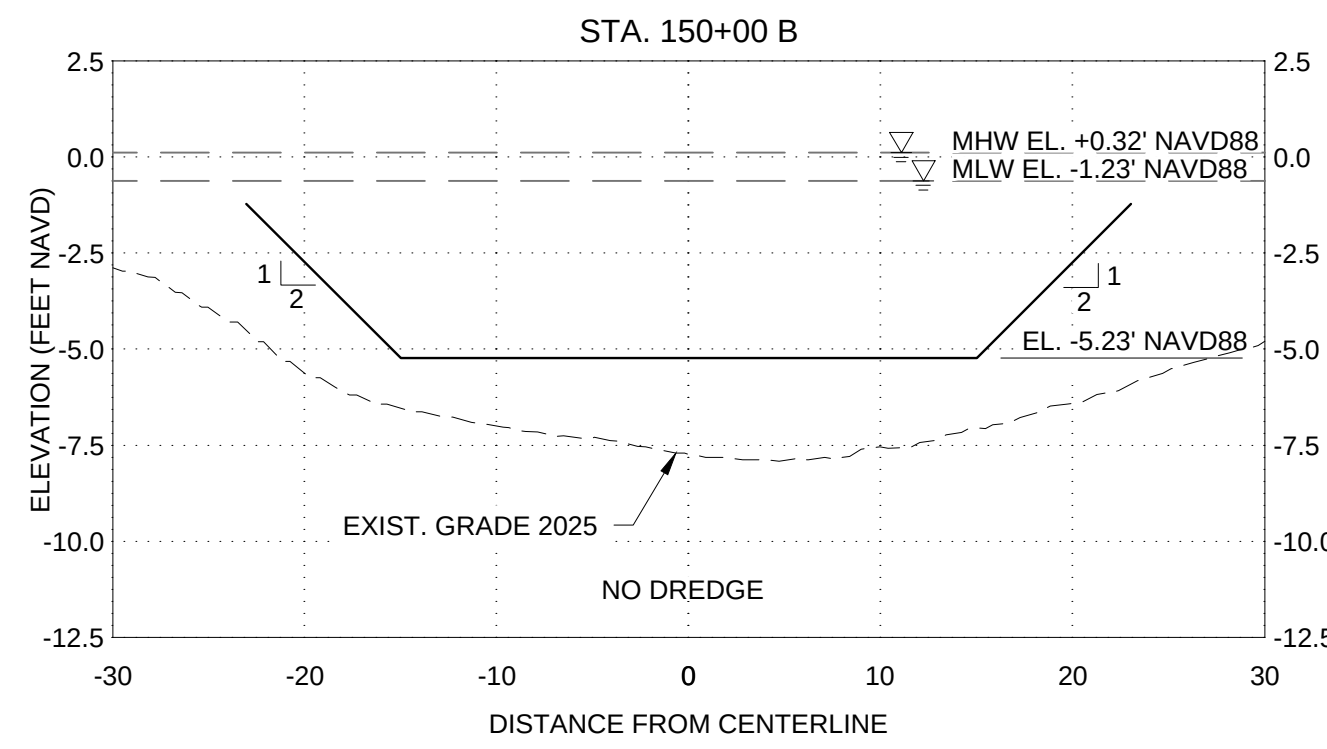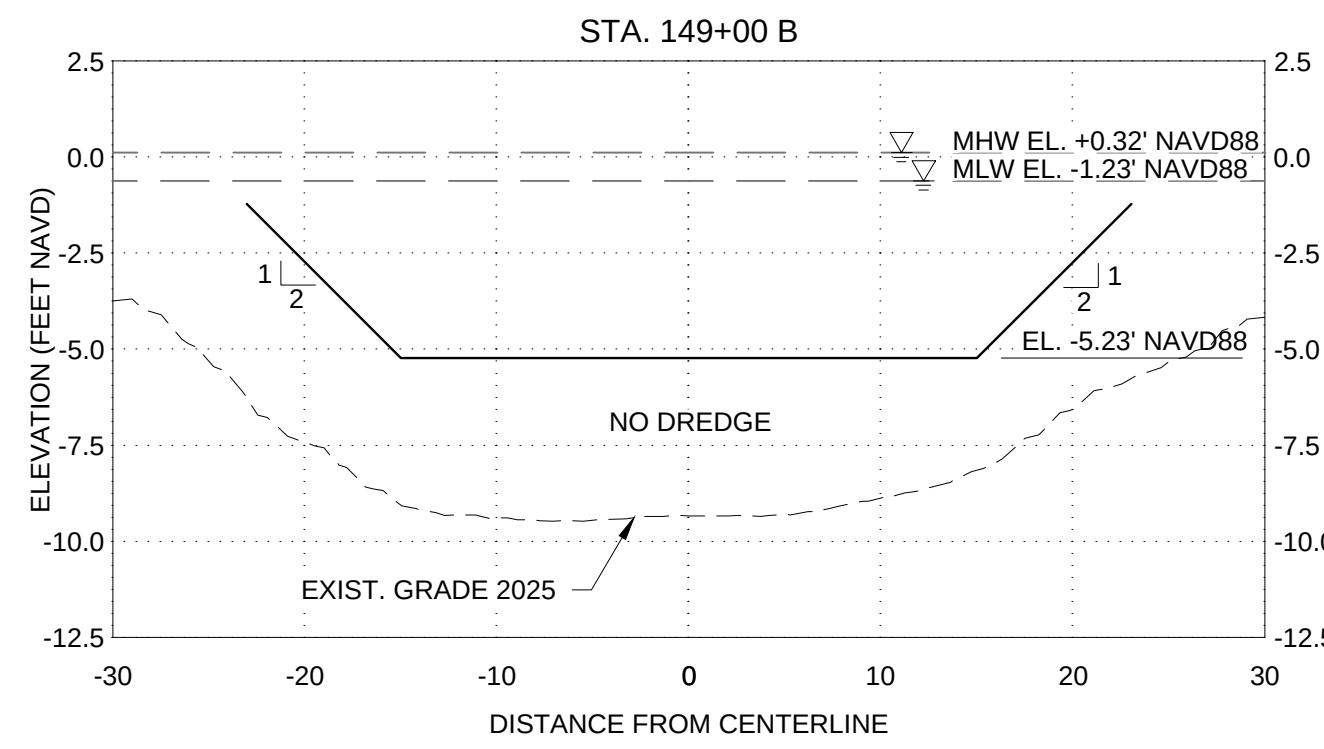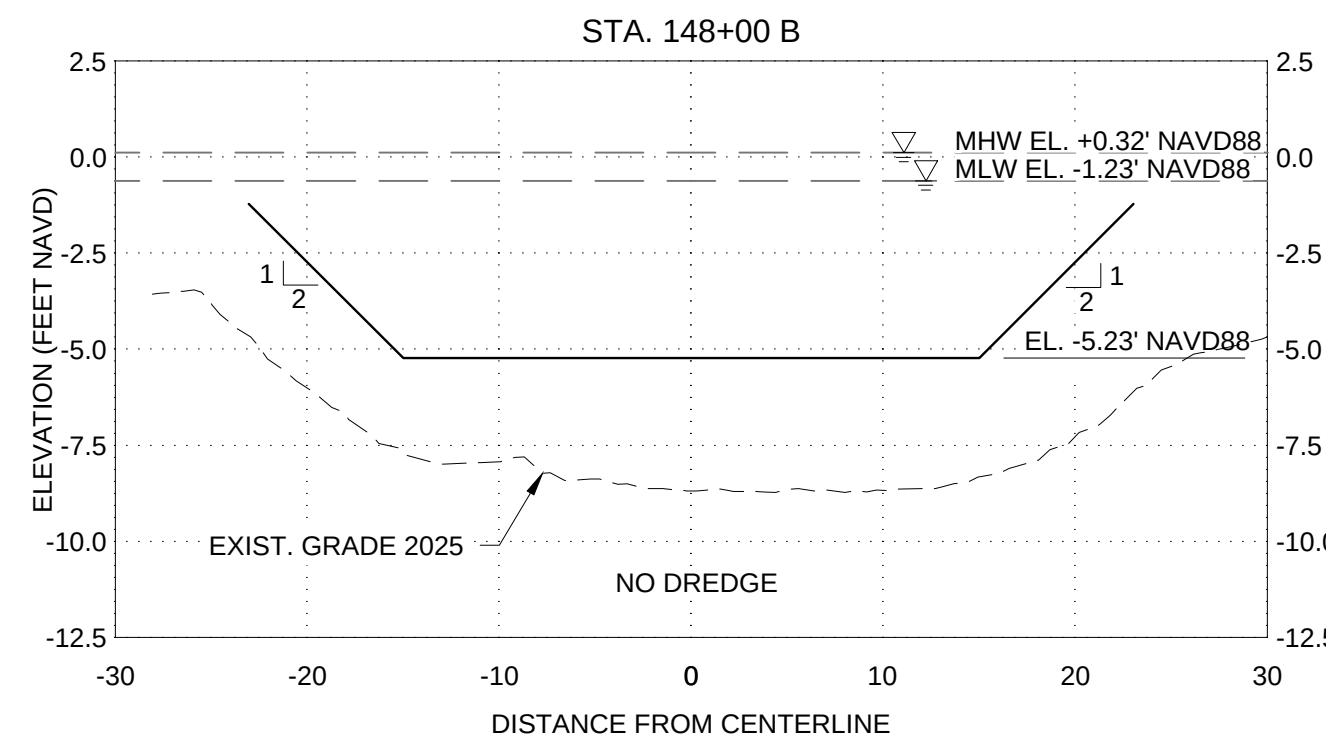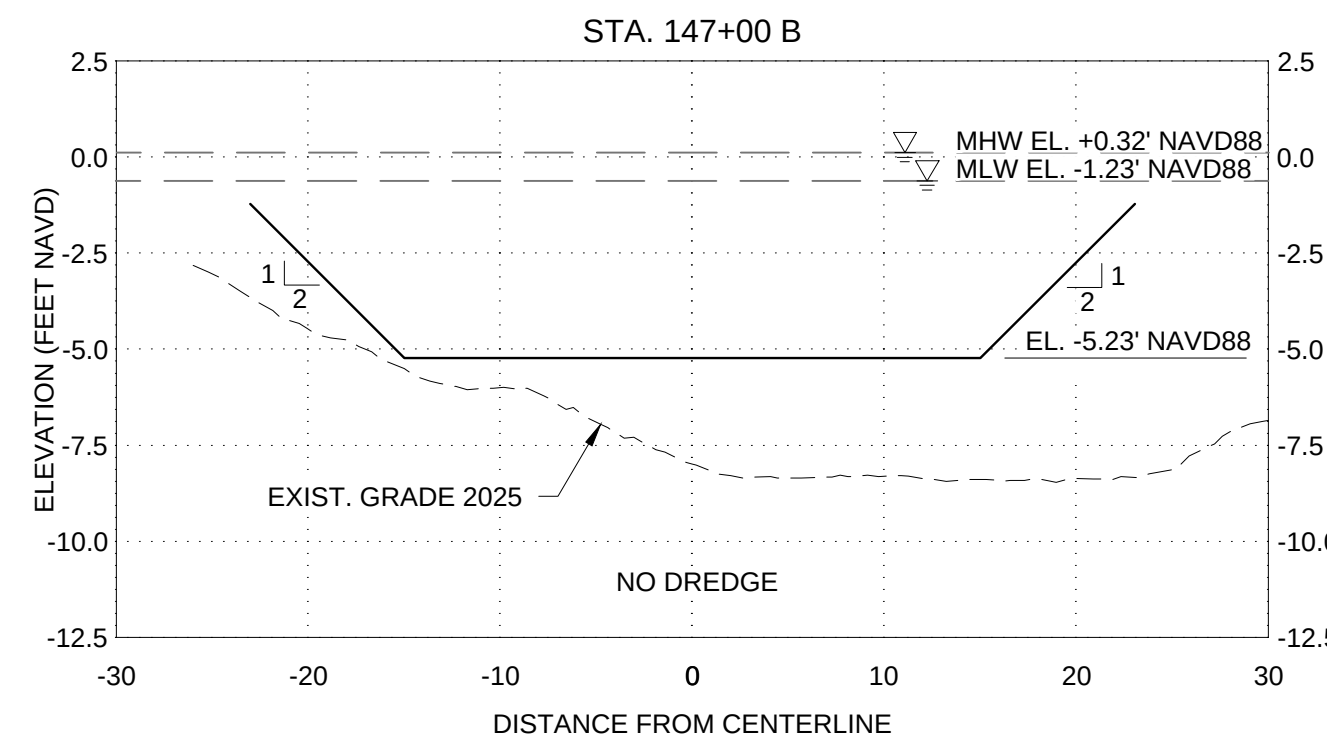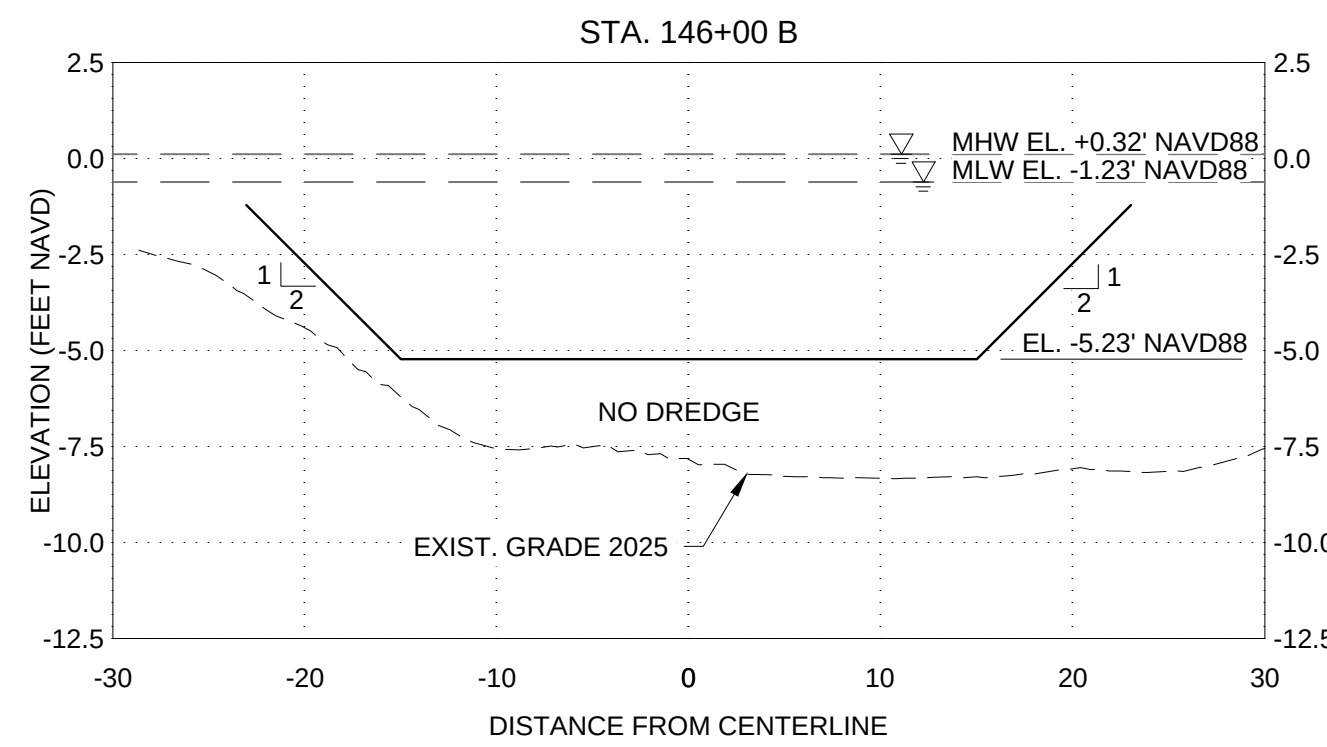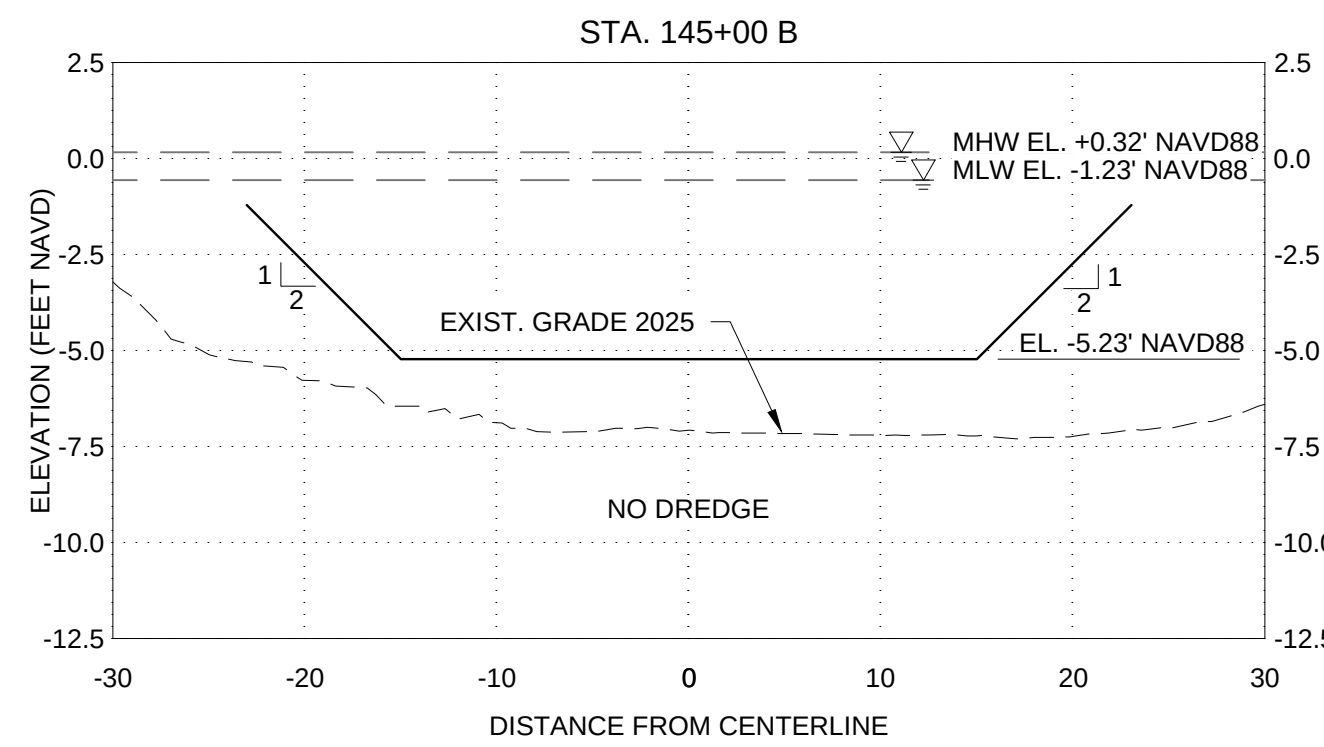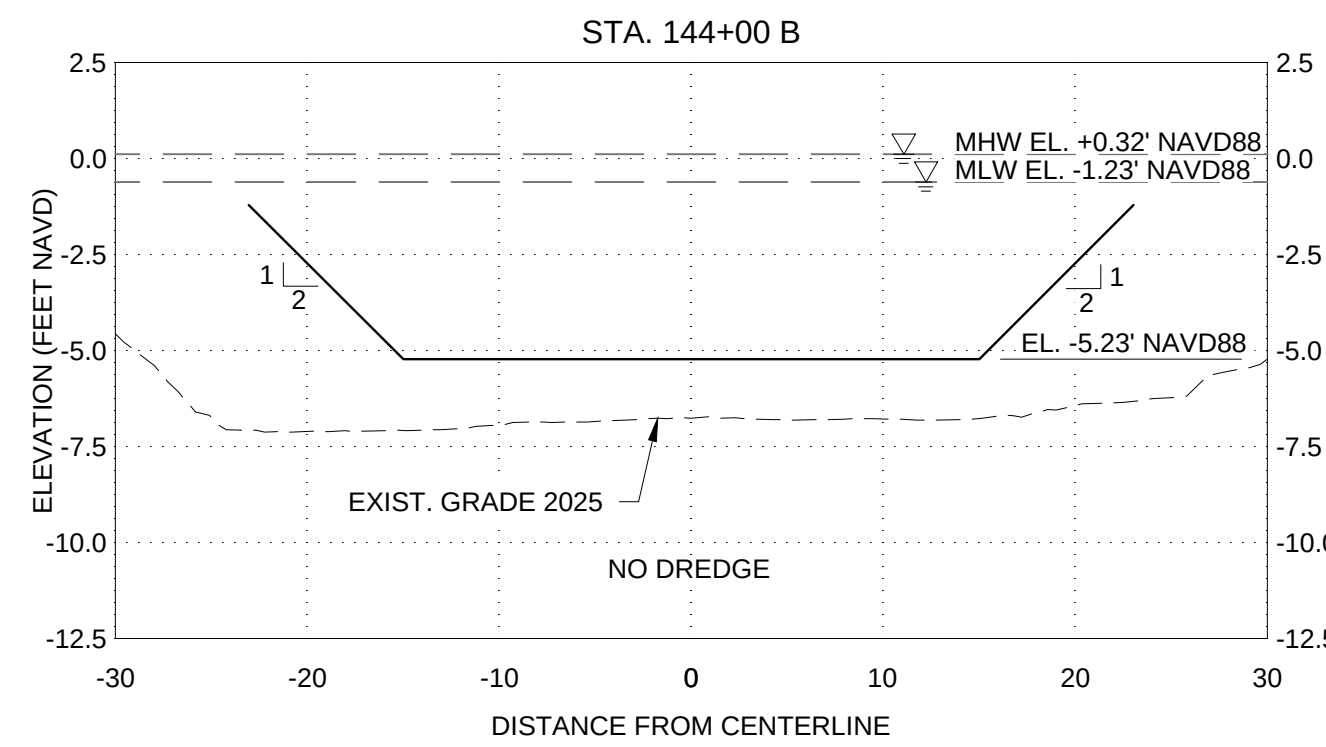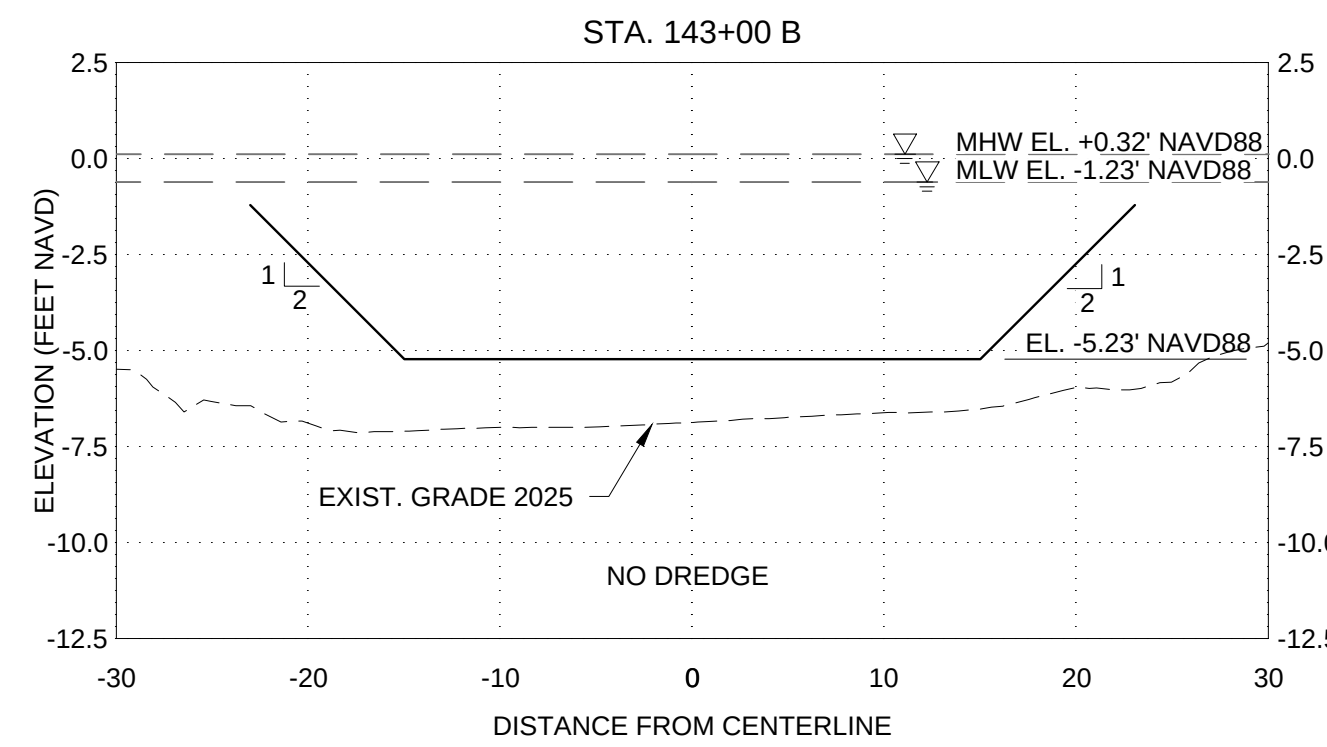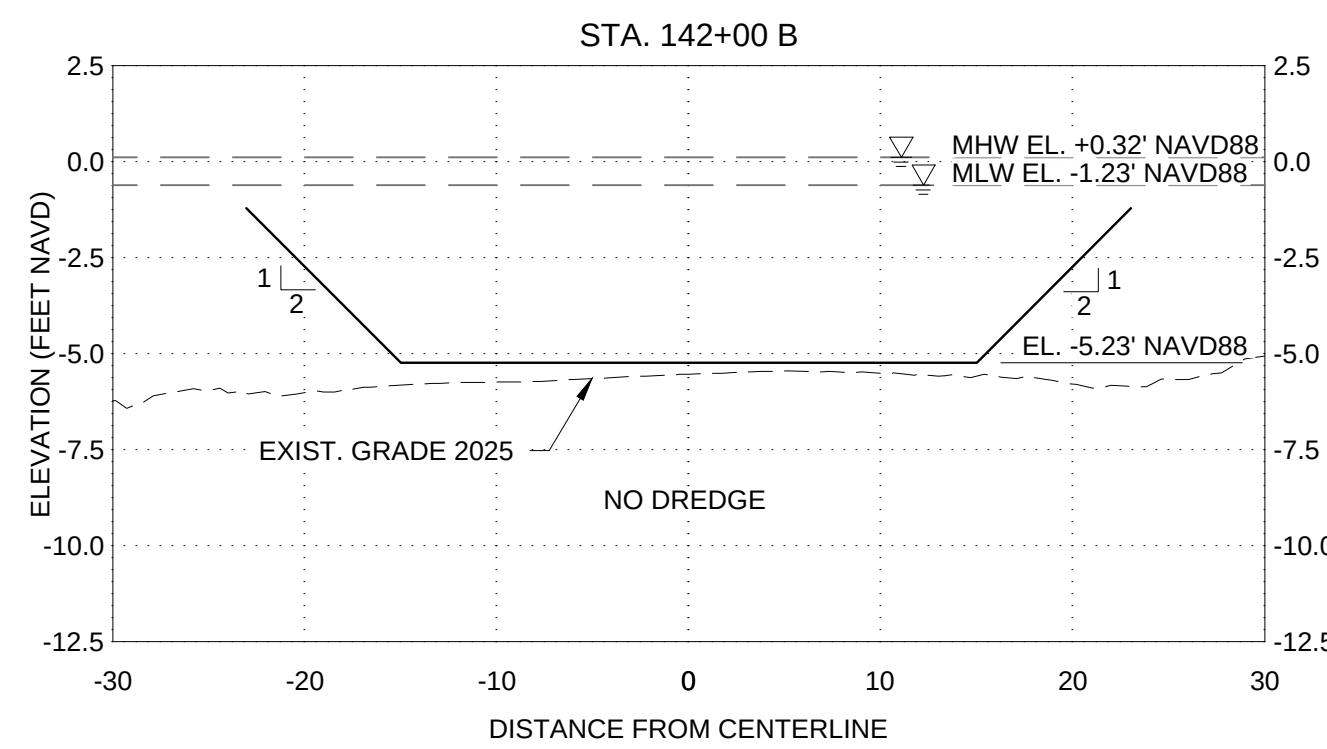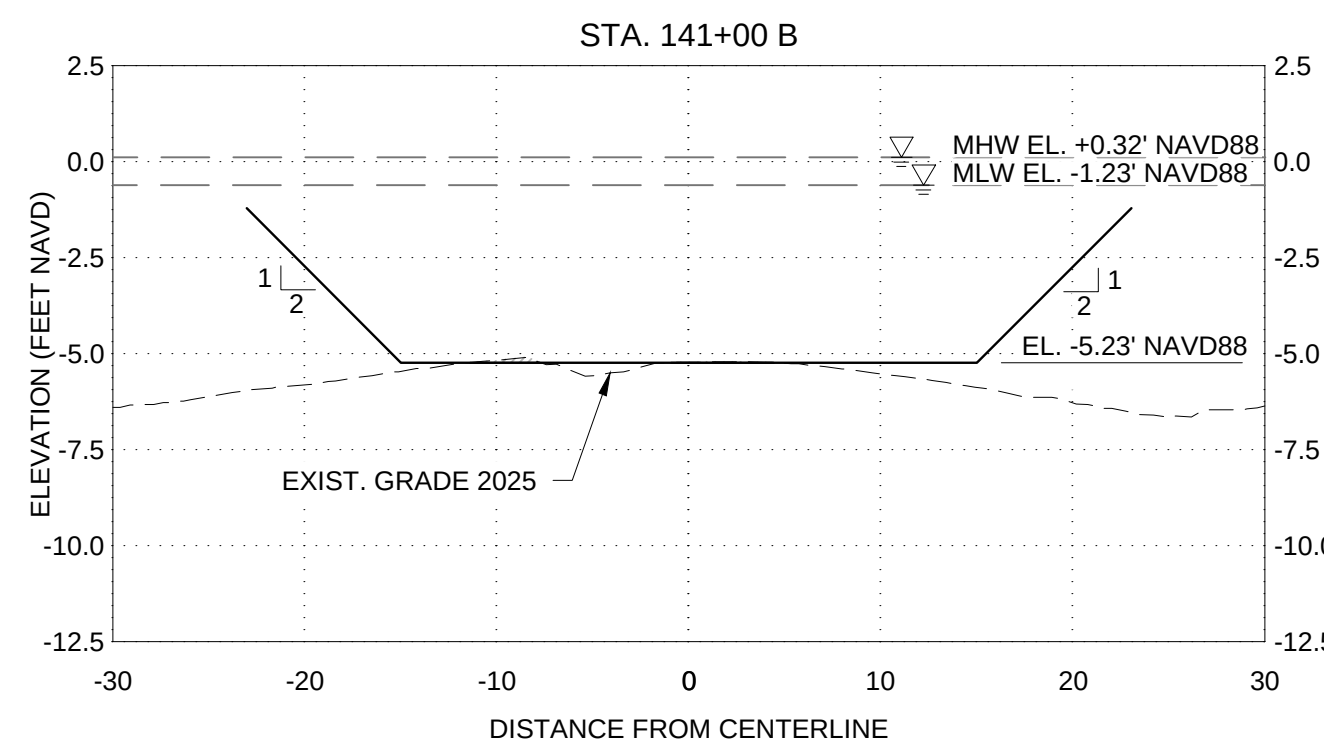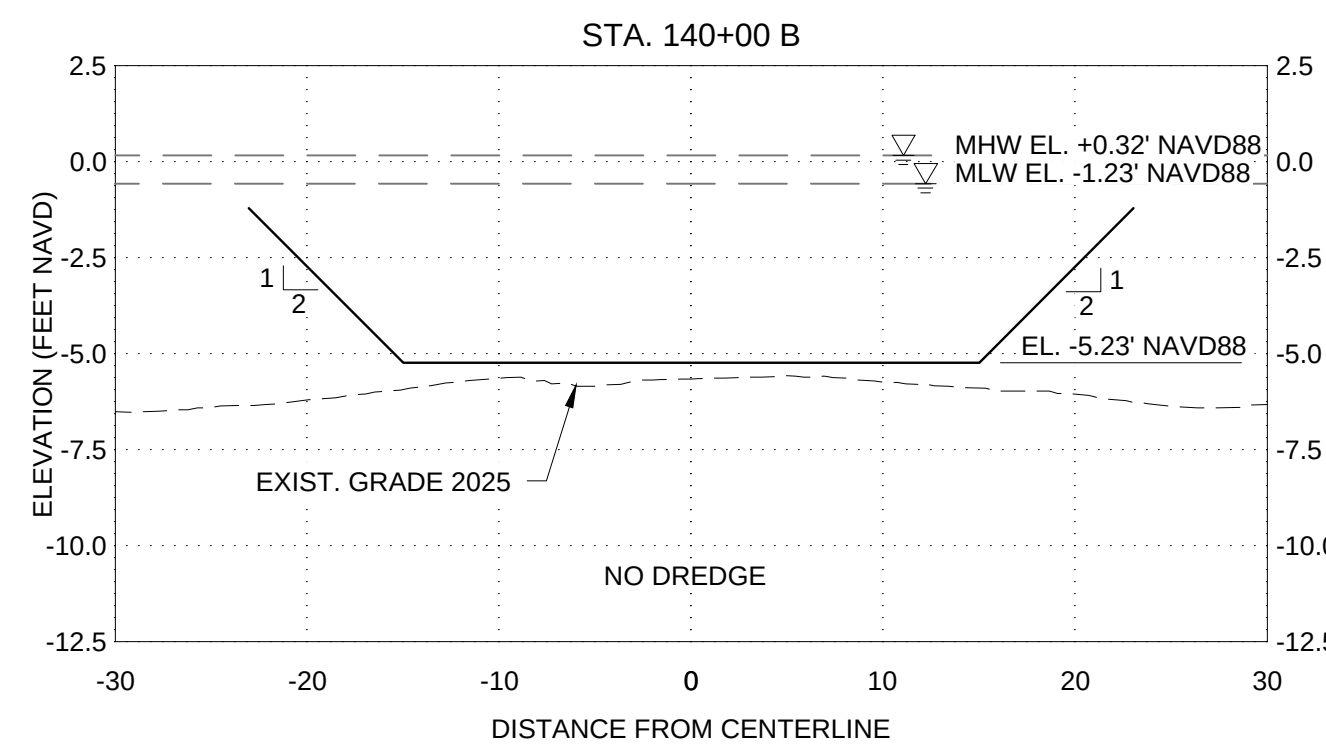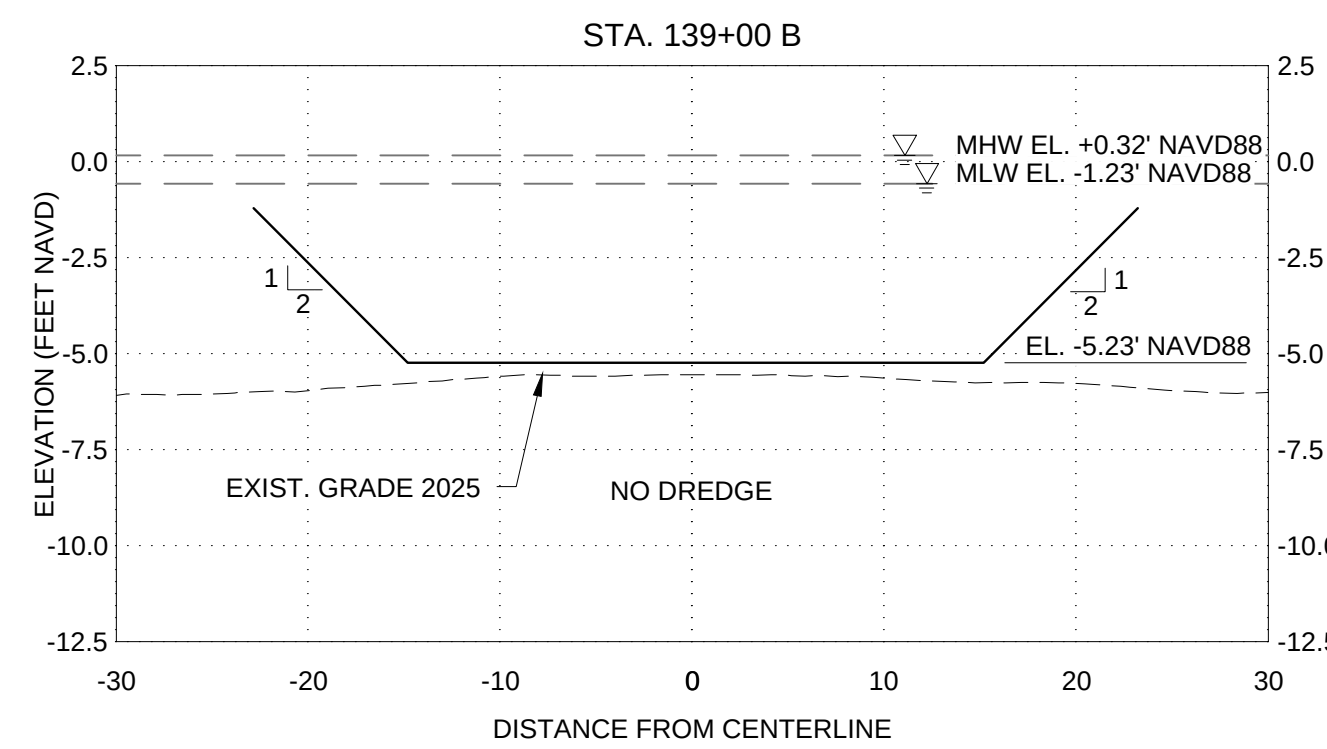

NOTE:
AREA SHOWN WITH SHOALING ARE BSAED ON THE DESIGN SURVEY
COMPLETED BY SURVTECH SOLUTIONS DATED JANUARY 2025. THE
CONTRACTOR SHALL CONDUCT A PRE-DREDGE SURVEY TO DETERMINE
ACTUAL AREAS REQUIRING DREDGING.

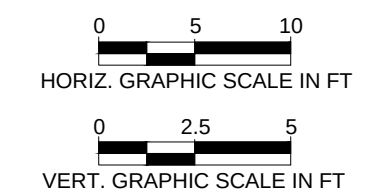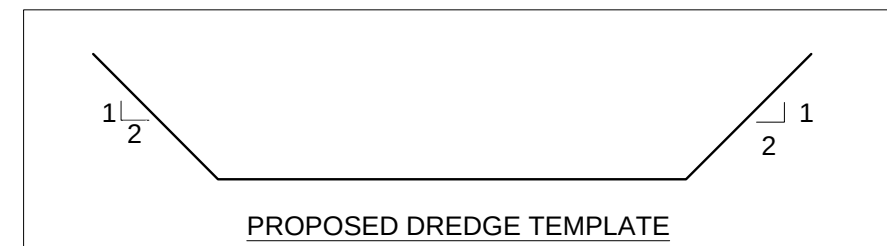

PROJECT:
PHILLIPPI CREEK
MAINTENANCE
DREDGING PROJECT

ADDRESS:

SARASOTA, FL

CLIENT:



ADDRESS:

200 E. MIAMI AVE.
VENICE, FL 34285

ENGINEER:

CUMMINS CEDERBERG
COASTAL & MARINE ENGINEERING
201 ALHAMBRA CIRCLE, SUITE 601
CORAL GABLES, FL 33134
TEL: +1 305 741-6155 FAX: +1 305-974-1969
WWW.CUMMINSCEDERBERG.COM
COA # 29062

CUMMINS | CEDERBERG
Coastal & Marine Engineering

PROJECT SPONSOR:



SARASOTA COUNTY PLANNING AND
DEVELOPMENT SERVICES,
ENVIRONMENTAL PROTECTION DIVISION
1001 SARASOTA CENTER BLVD
SARASOTA, FL 34240

SEAL:

[illegible]

CC PROJECT NO:	137125
----------------	--------

DRAWN	GK
-------	----

















CHECKED	KF/JB
---------	-------

SCALE	REFERS TO 22X34 SHEET
-------	-----------------------



SHEET TITLE

CROSS SECTIONS
(10 OF 13)

CM-2.12

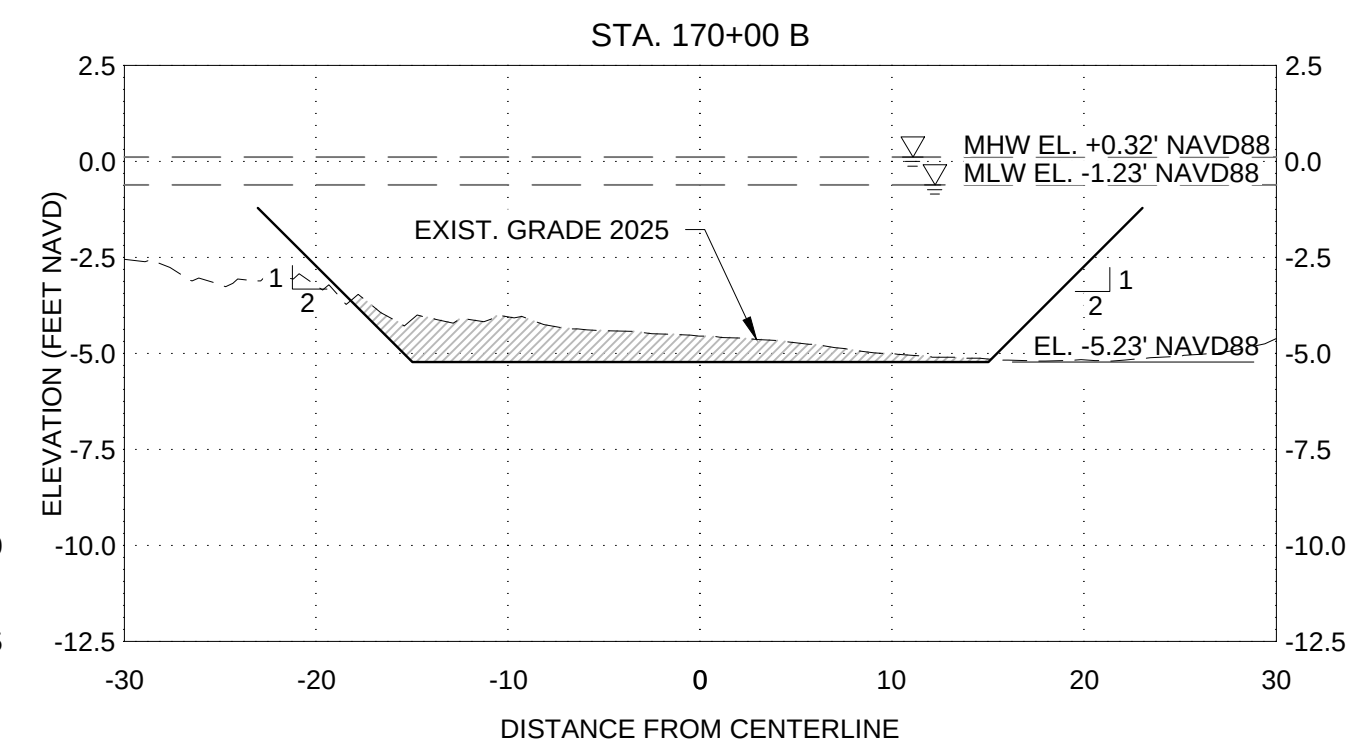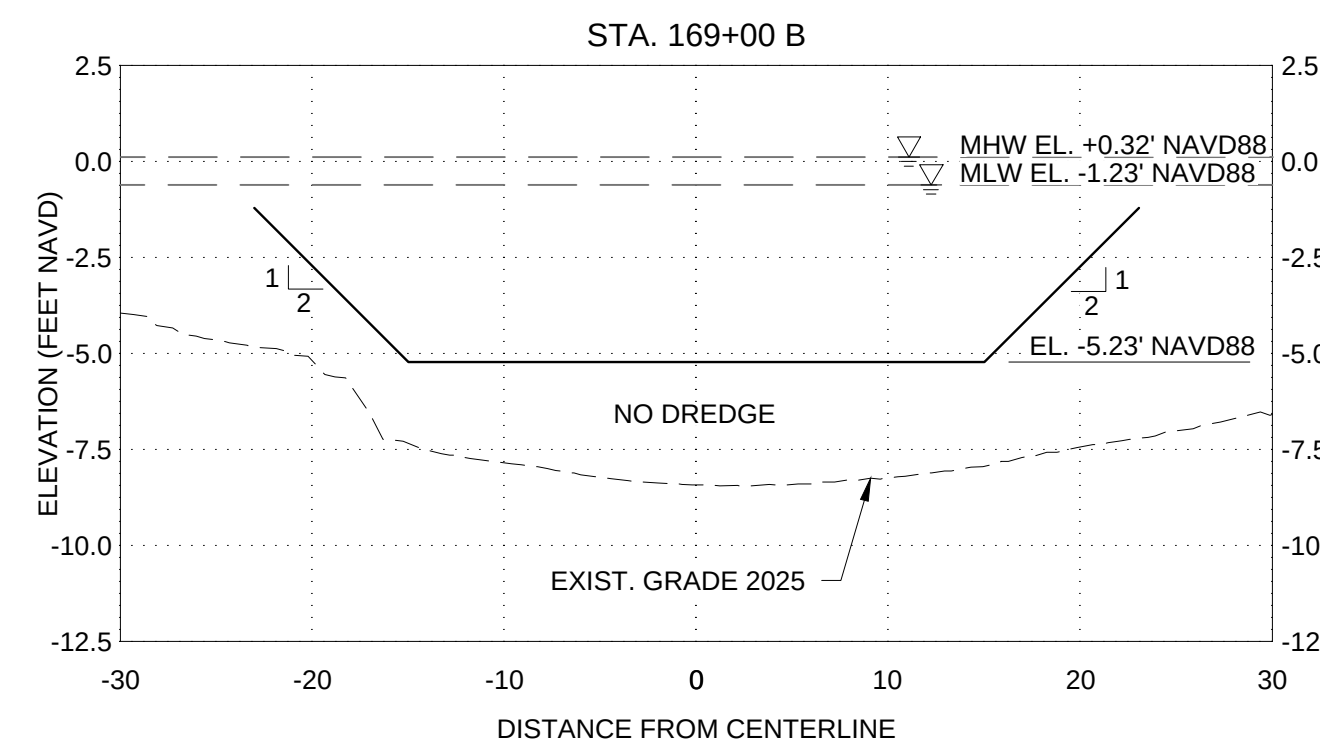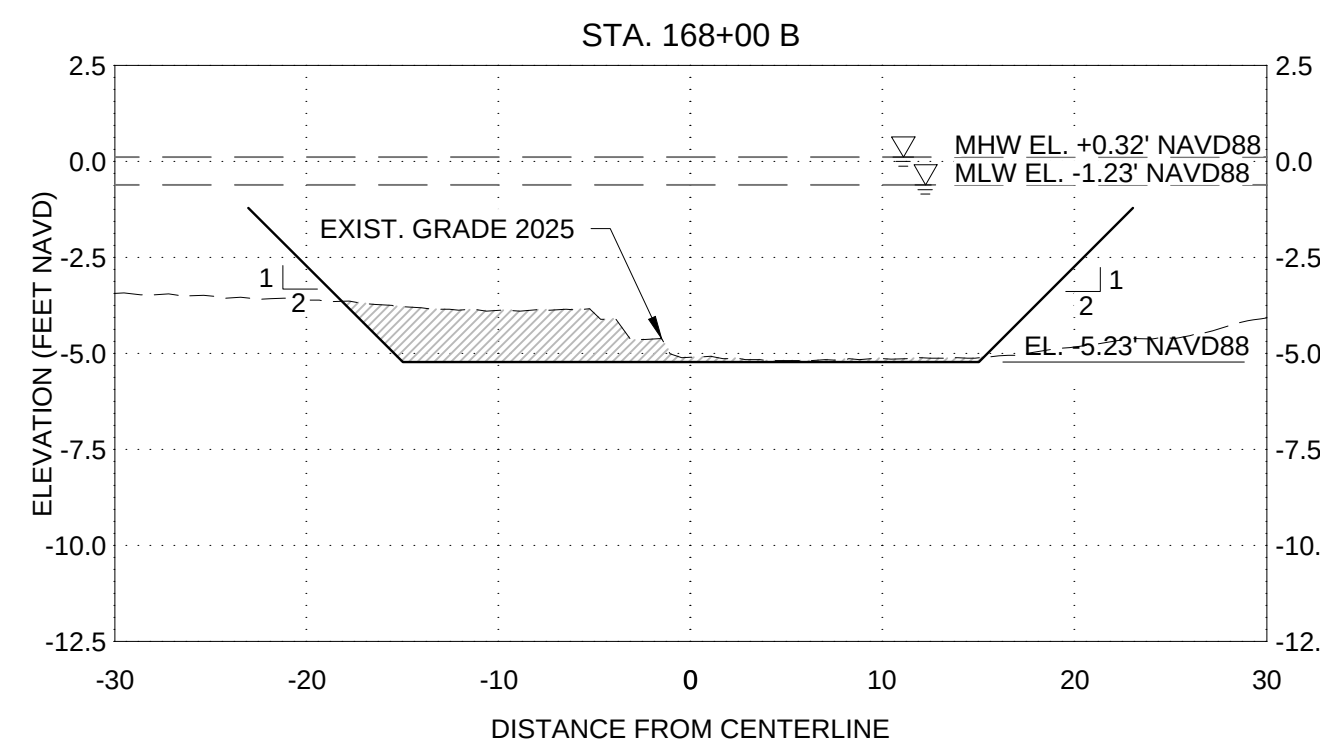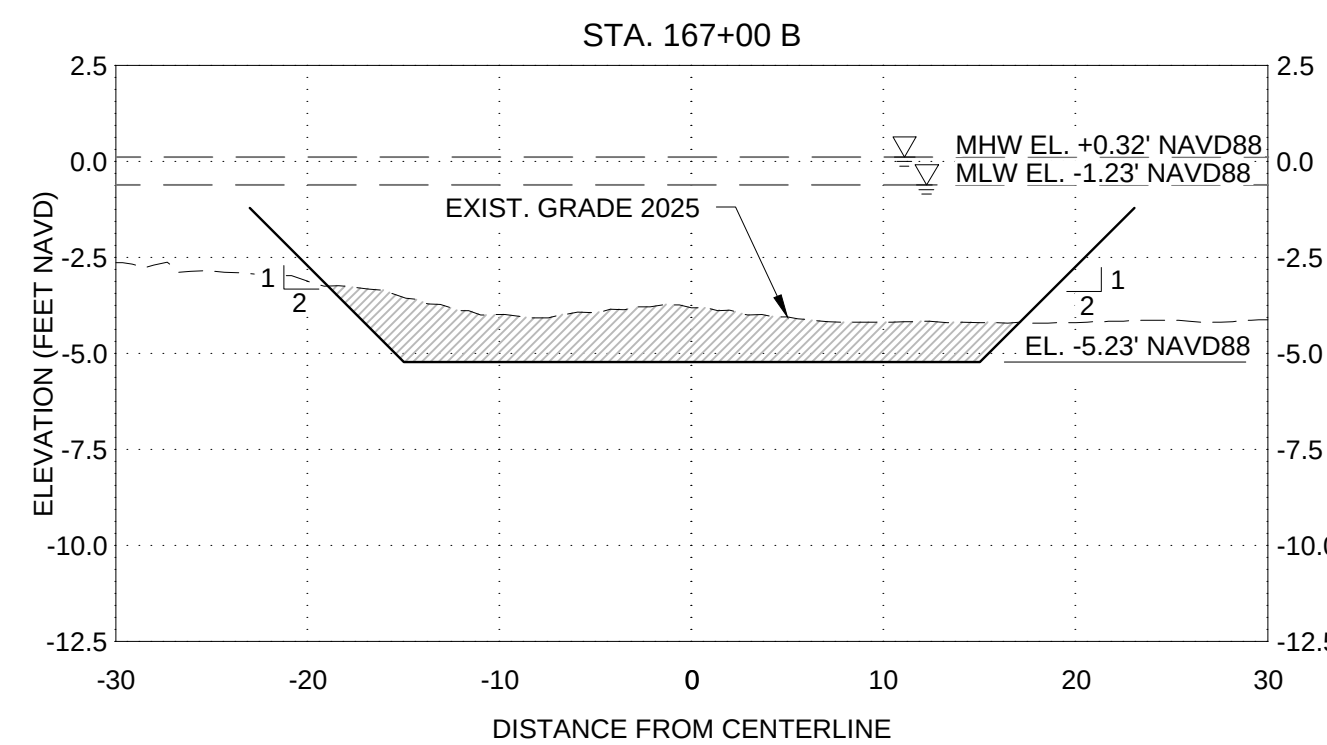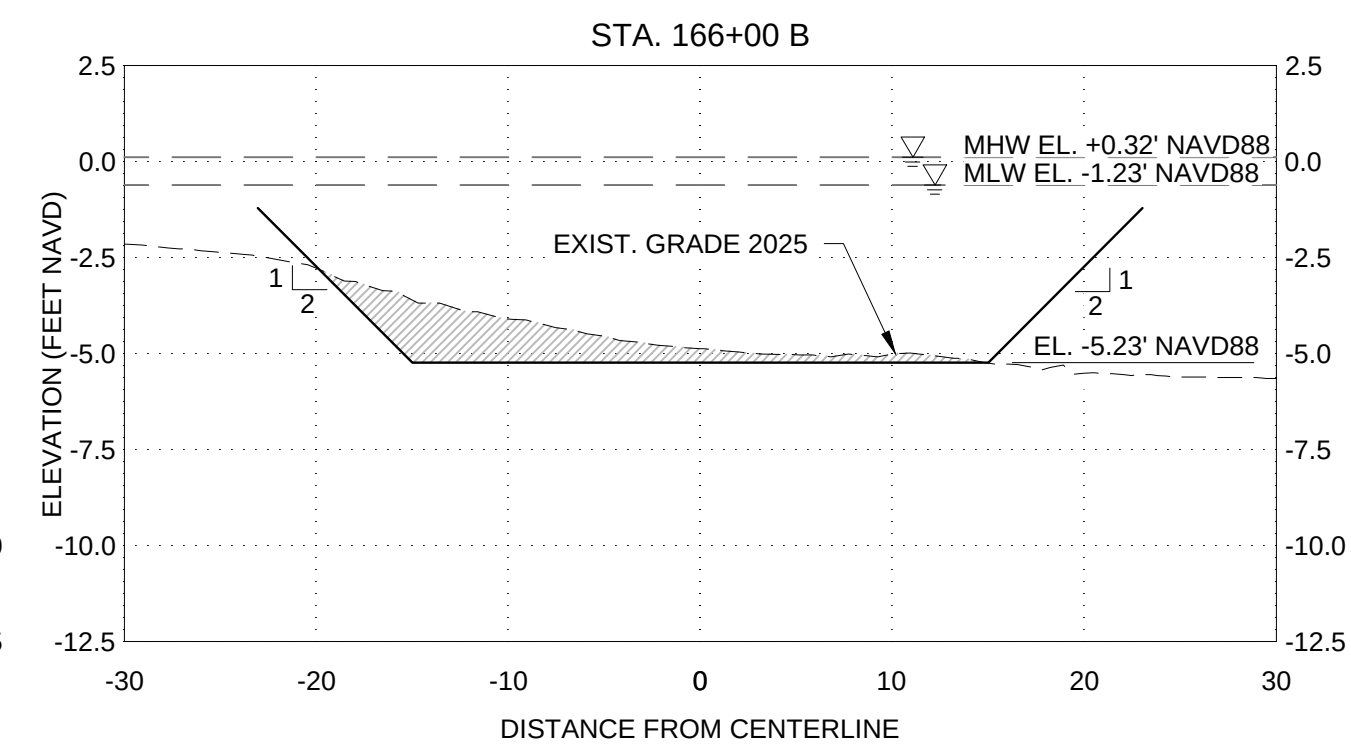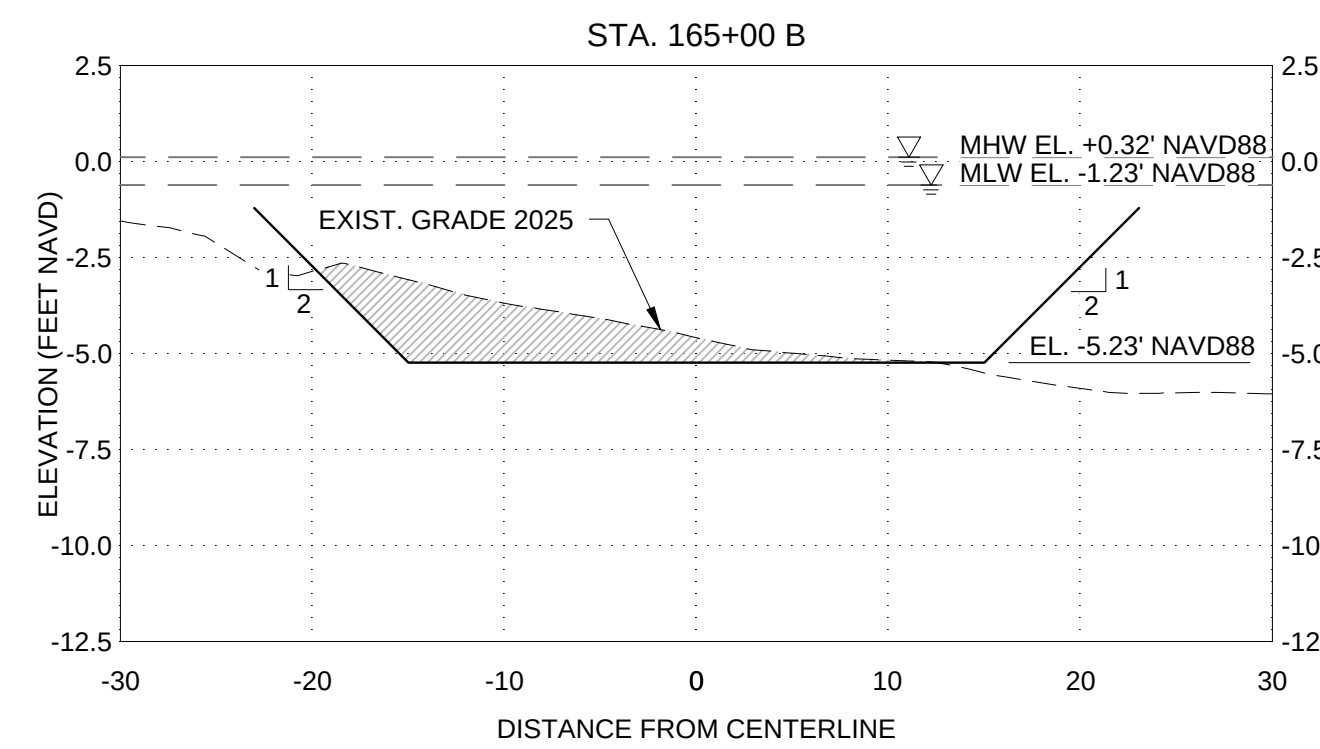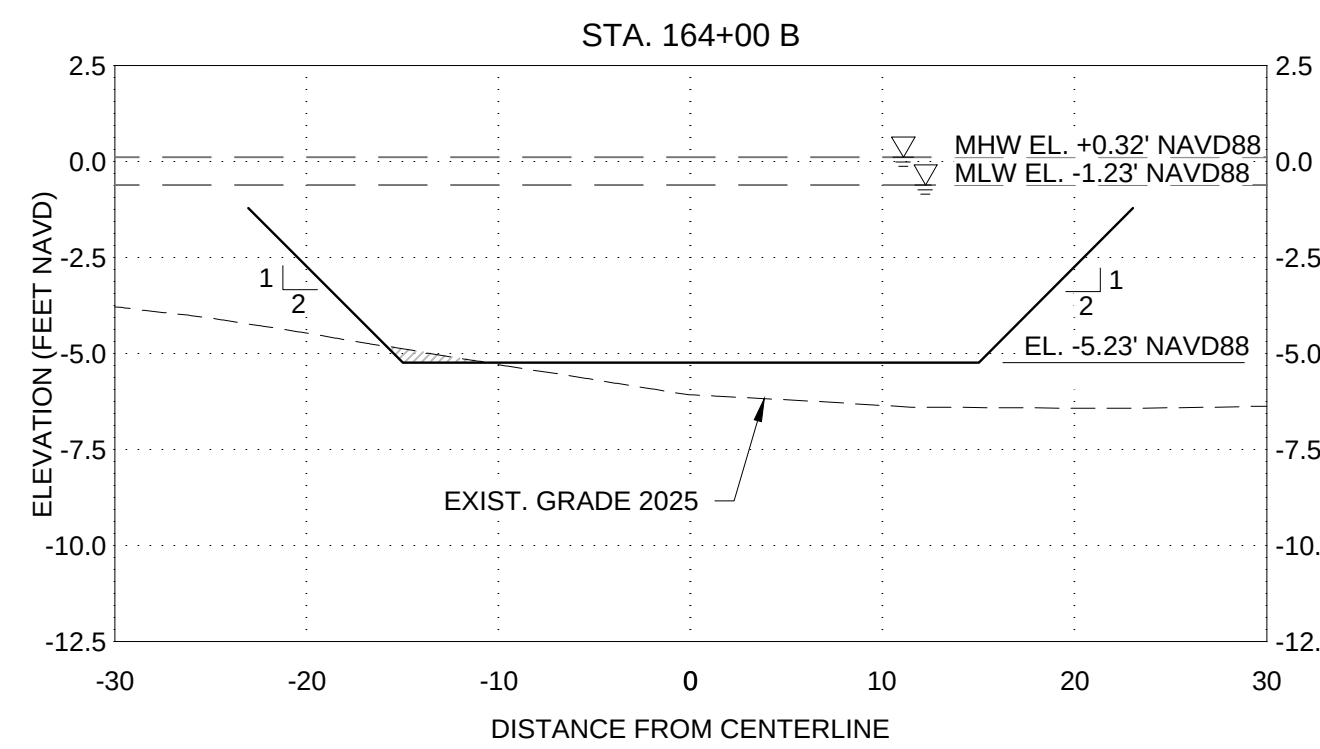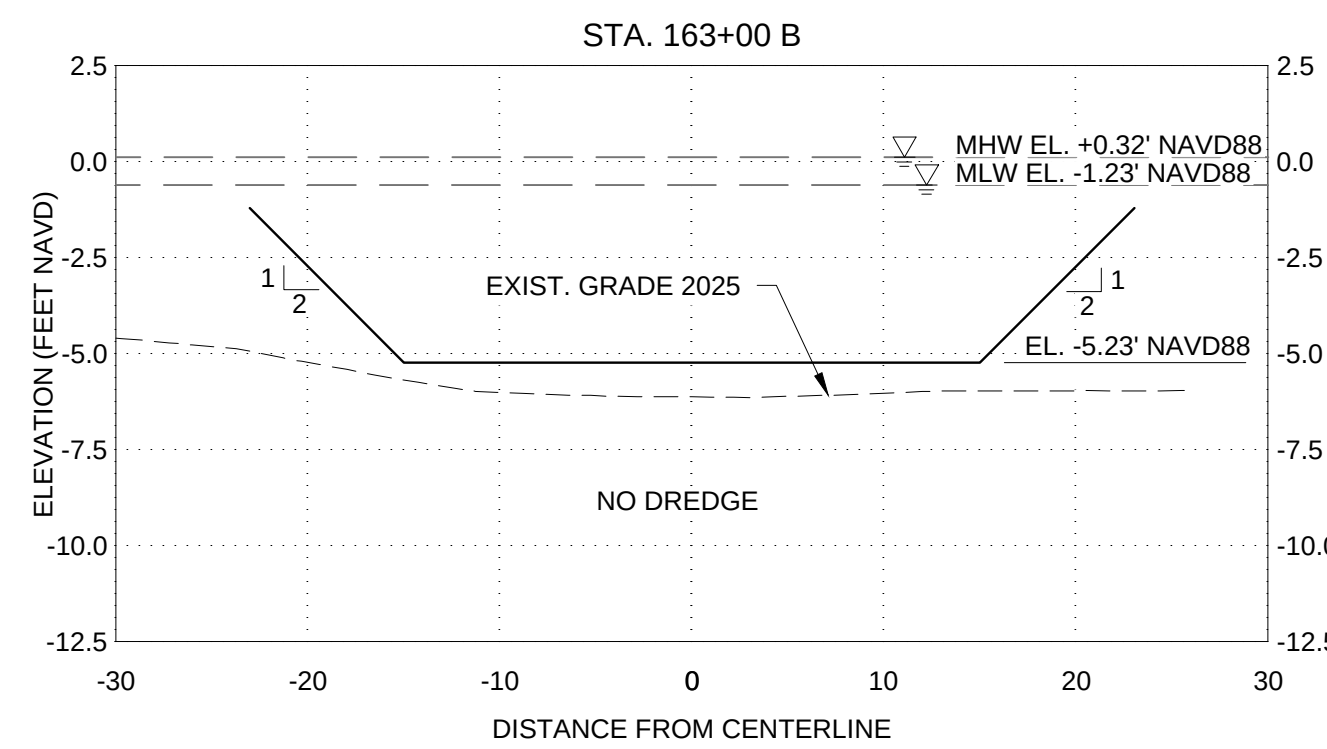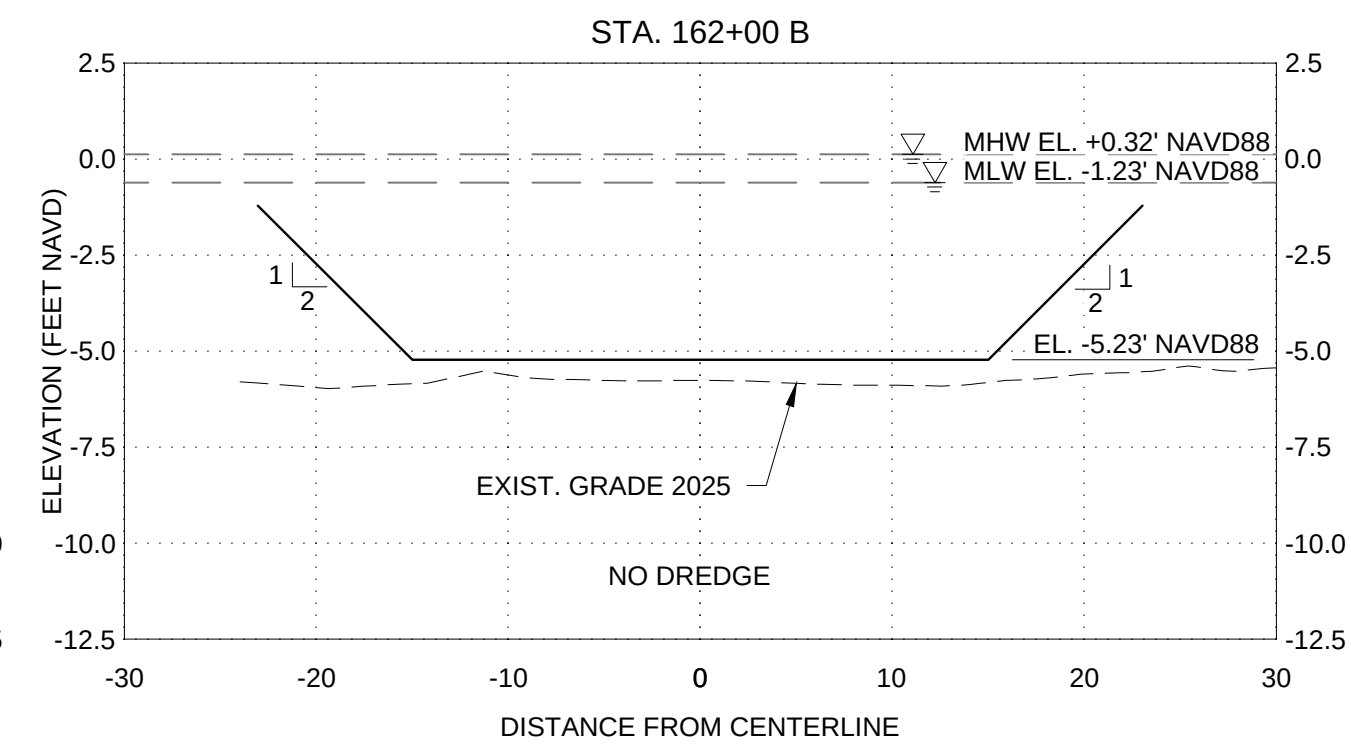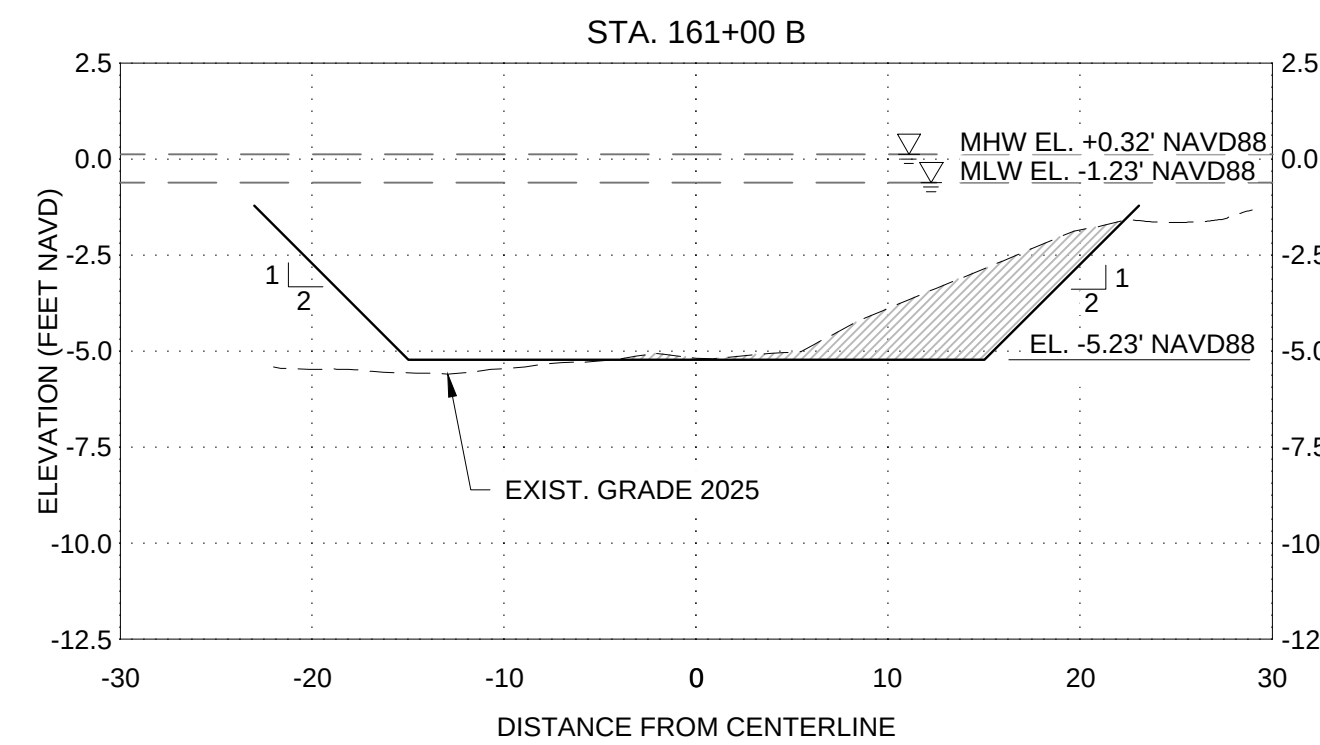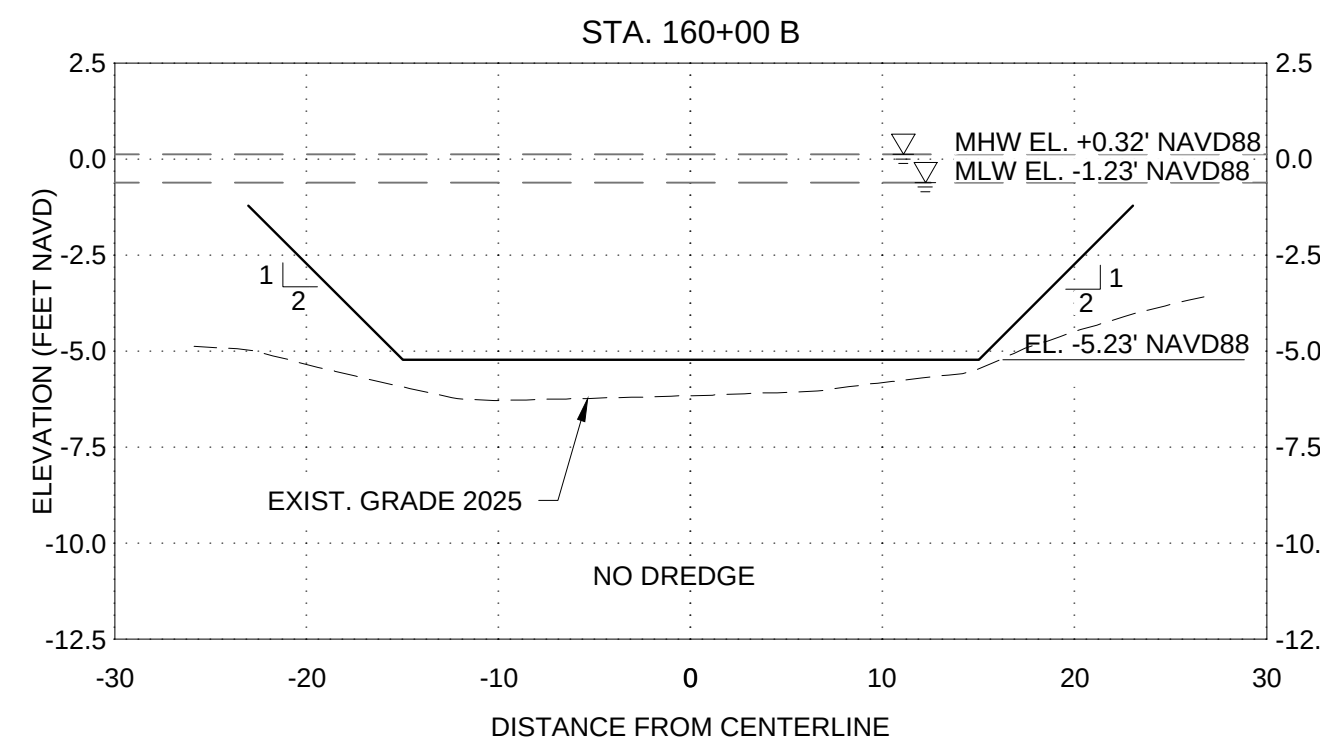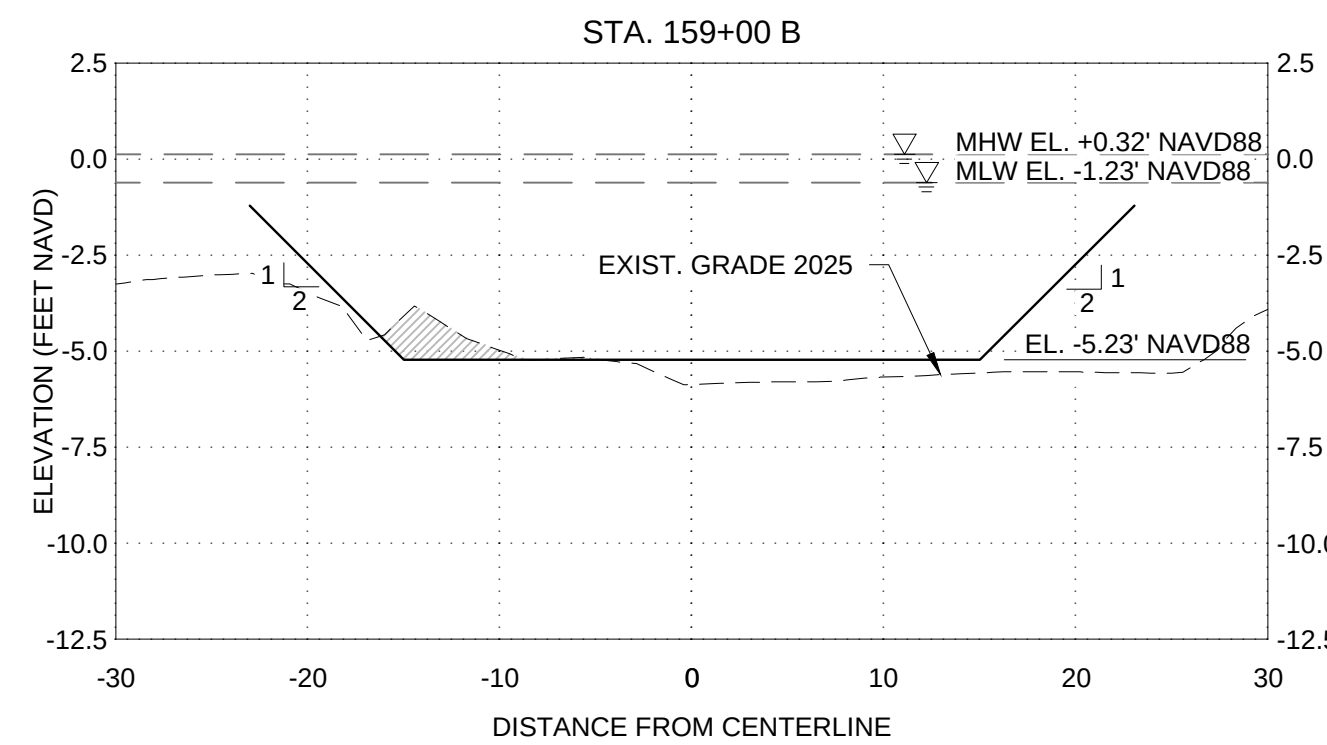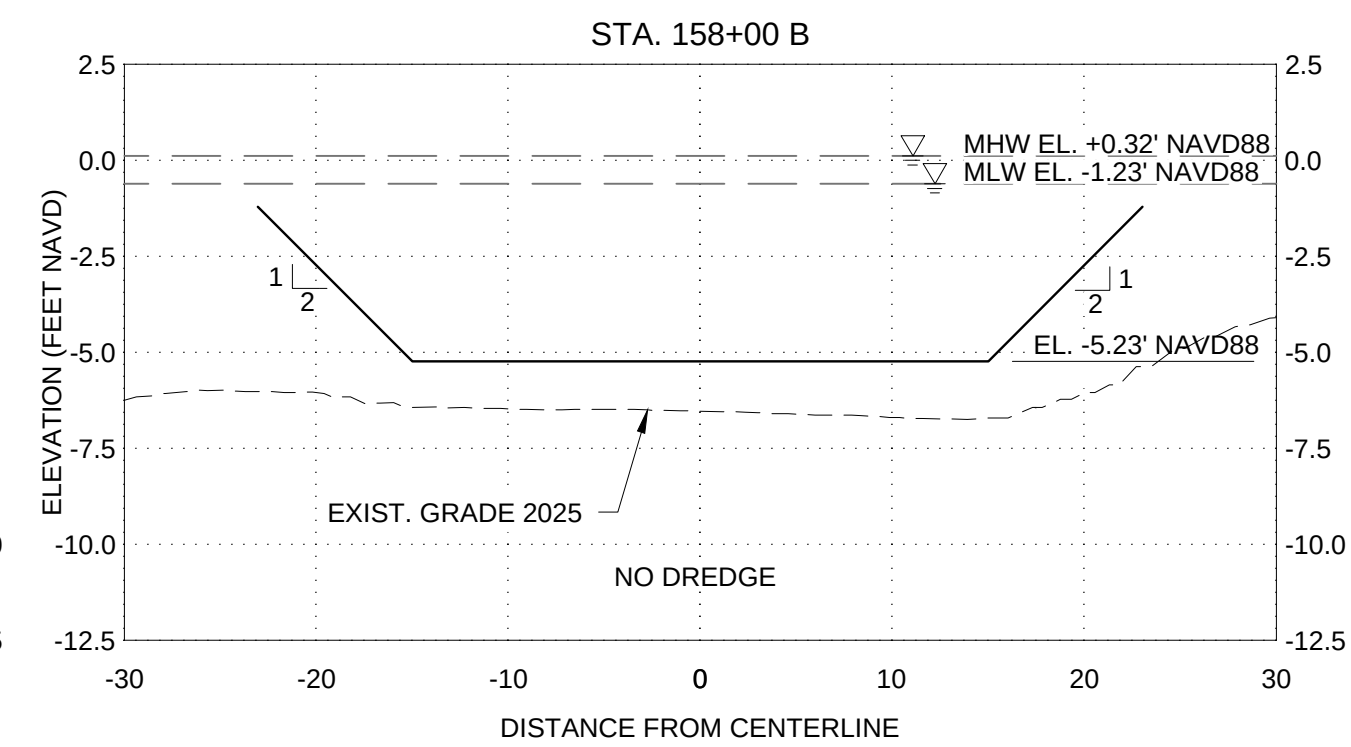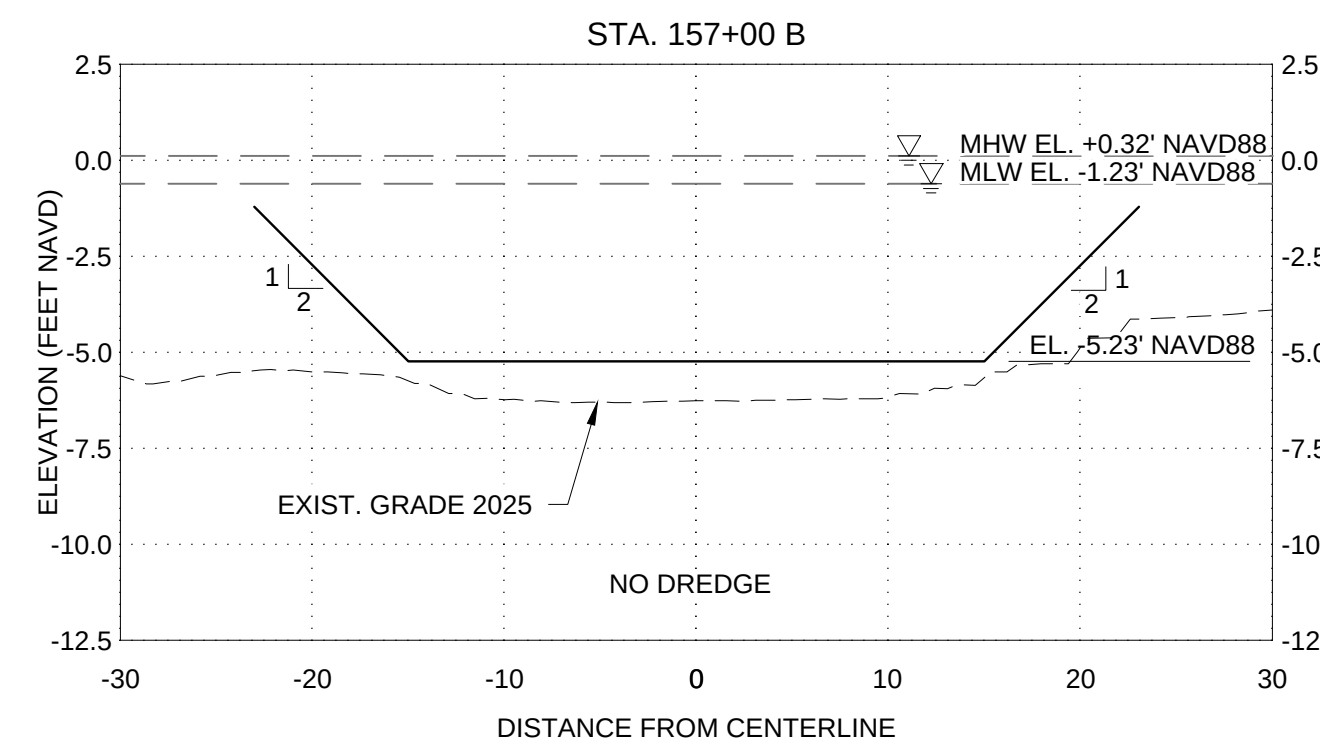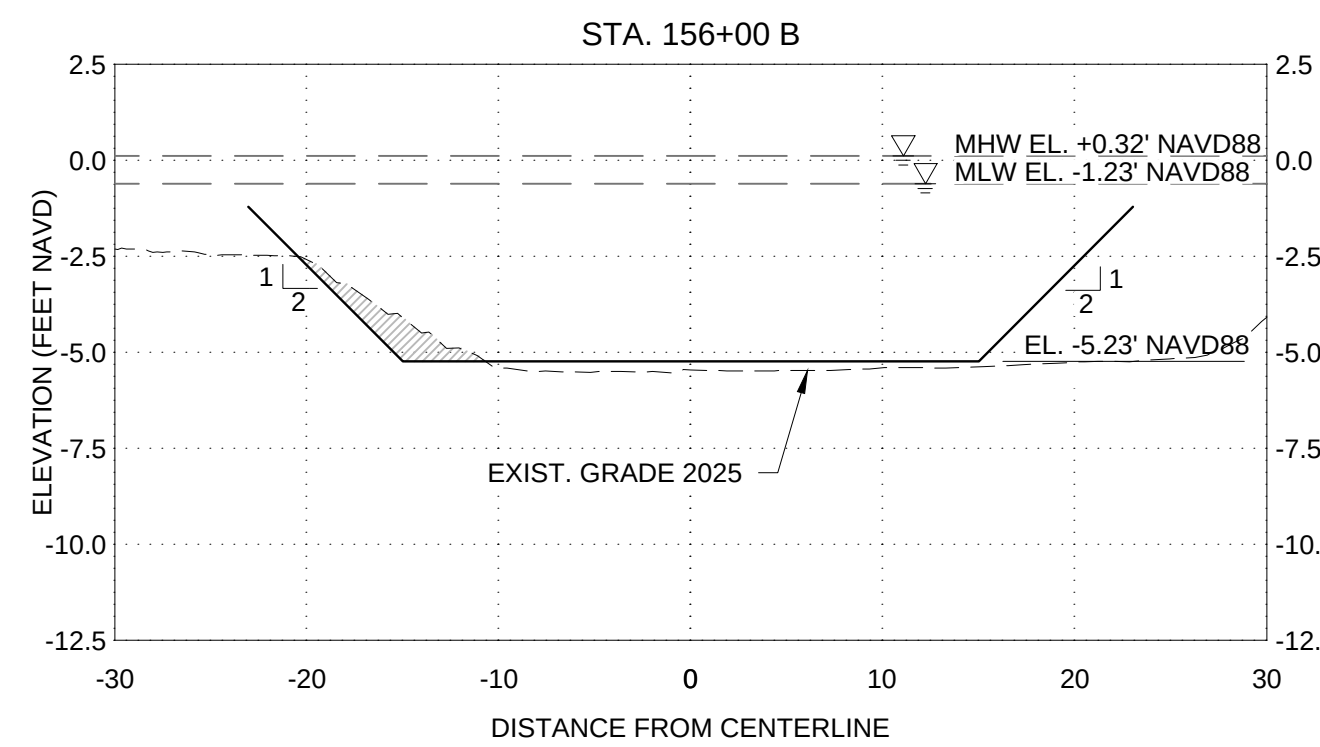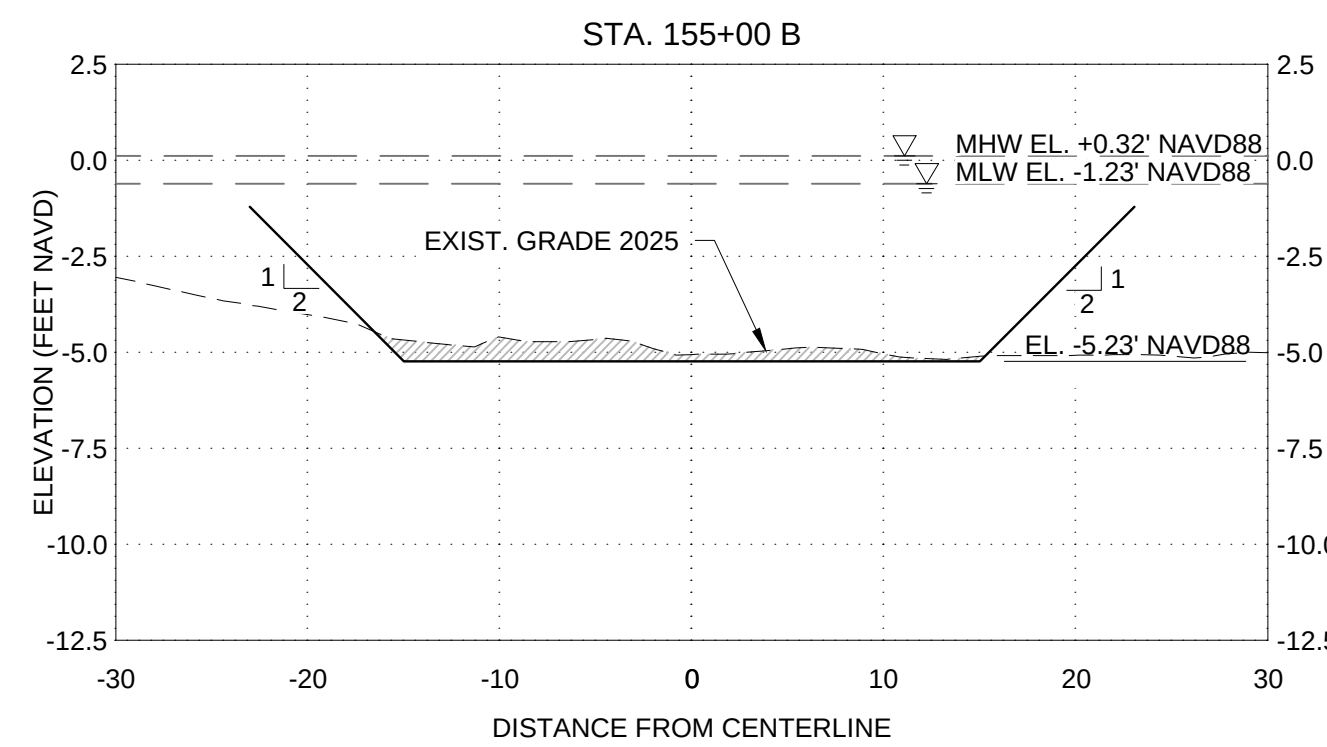

NOTE:
AREA SHOWN WITH SHOALING ARE BSAED ON THE DESIGN SURVEY
COMPLTBY BY SURVTECH SOLUTIONS DATED JANUARY 2025. THE
CONTRACTOR SHALL CONDUCT A PRE-DREDGE SURVEY TO DETERMINE
ACTUAL AREAS REQUIRING DREDGING.

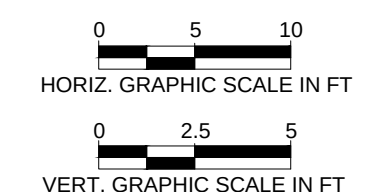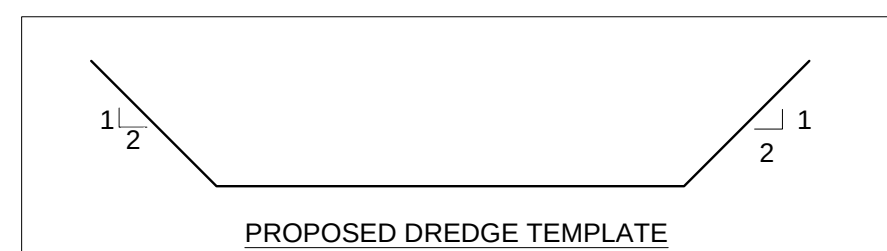

PROJECT:
PHILLIPPI CREEK
MAINTENANCE
DREDGING PROJECT

ADDRESS:
SARASOTA, FL

CLIENT:


 **WCIND**
West Coast Inland Navigation District

ADDRESS:
200 E. MIAMI AVE.
VENICE, FL 34285

ENGINEER:
CUMMINS CEDERBERG
COASTAL & MARINE ENGINEERING
201 ALHAMBRA CIRCLE, SUITE 601
CORAL GABLES, FL 33134
TEL: +1 305 741-6155 FAX: +1 305-974-1969
WWW.CUMMINSCEDERBERG.COM
COA # 29062

CUMMINS | CEDERBERG
Coastal & Marine Engineering

PROJECT SPONSOR:


SARASOTA COUNTY PLANNING AND
DEVELOPMENT SERVICES,
ENVIRONMENTAL PROTECTION DIVISION
1001 SARASOTA CENTER BLVD
SARASOTA, FL 34240

















SEAL:

[illegible]



CC PROJECT NO:	137125
DRAWN	GK
CHECKED	KF/JB
SCALE	REFERS TO 22X34 SHEET

CROSS SECTIONS
(11 OF 13)

CM-2.13

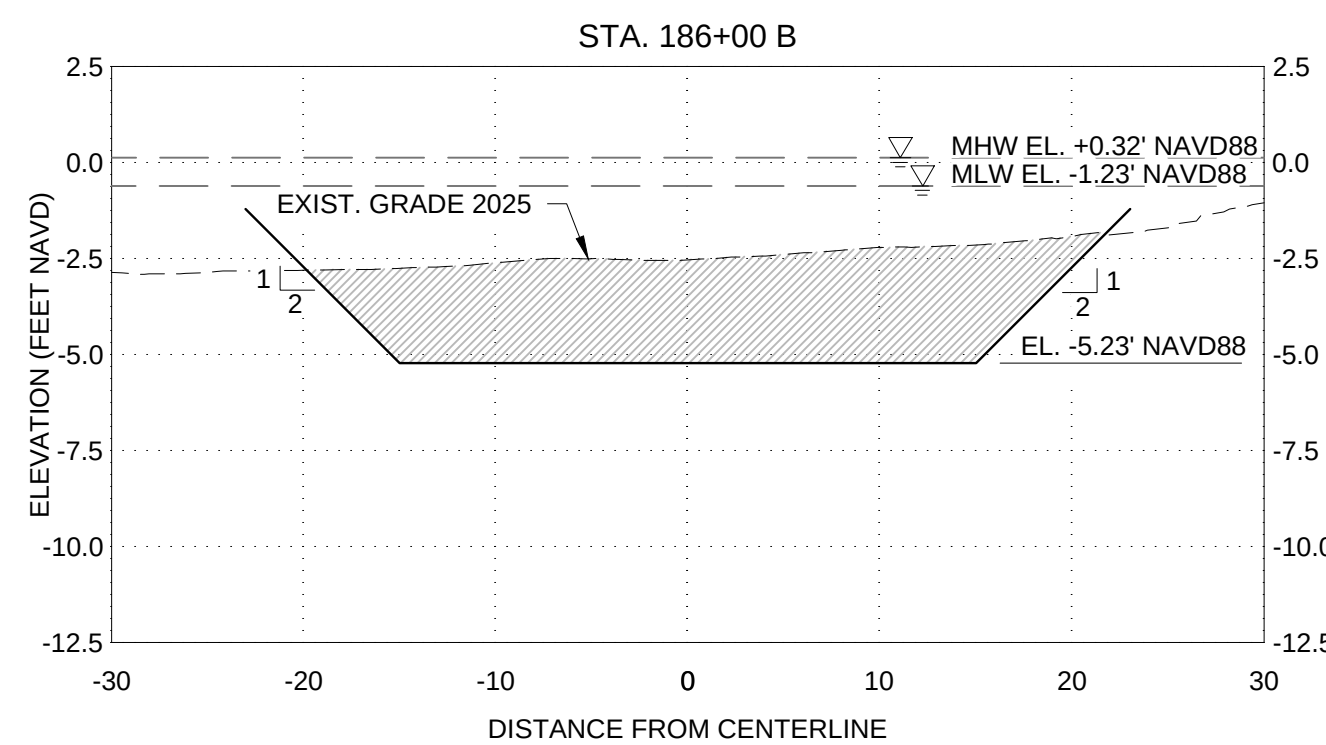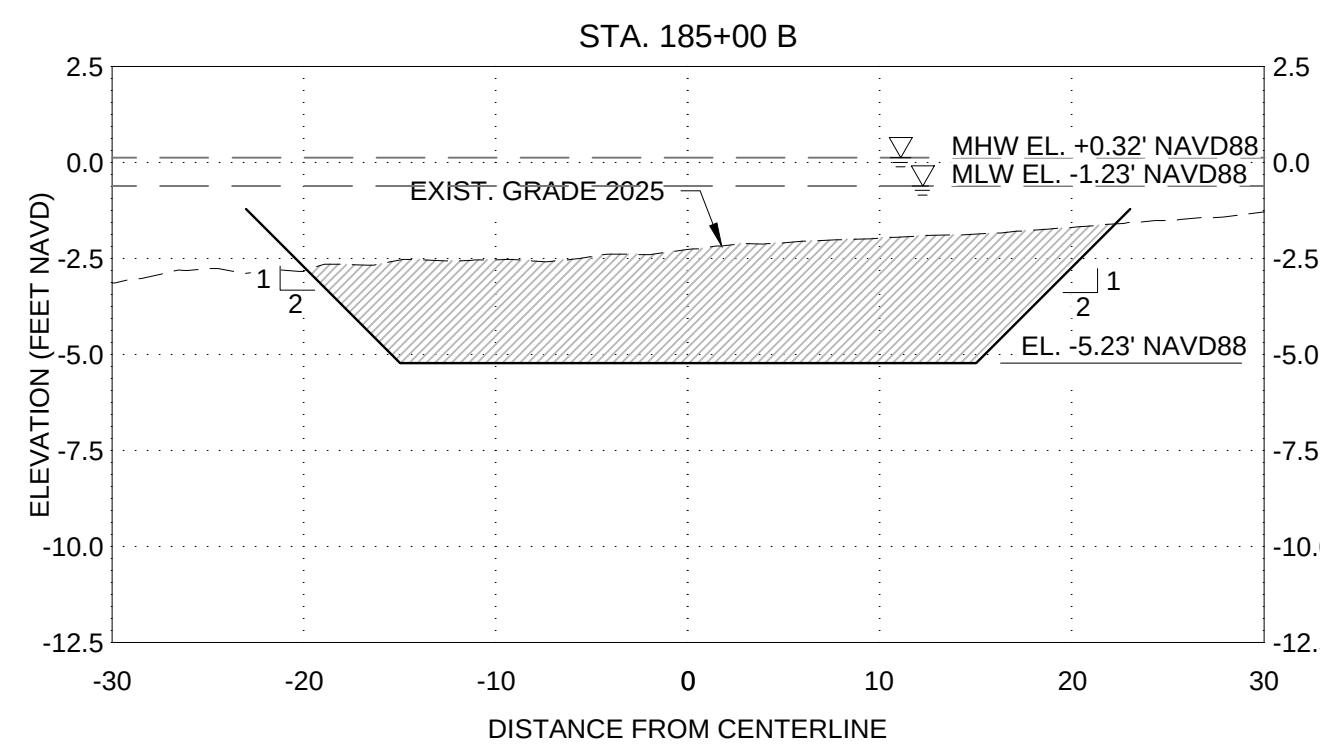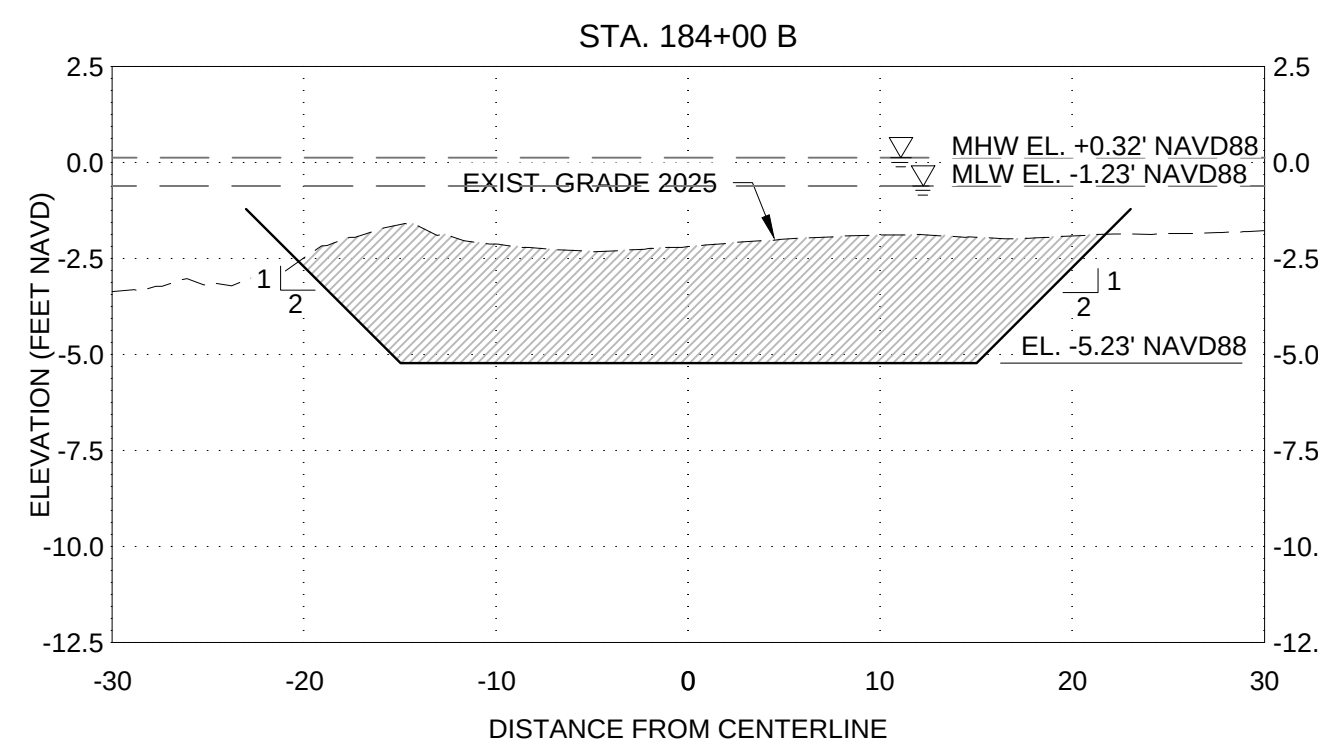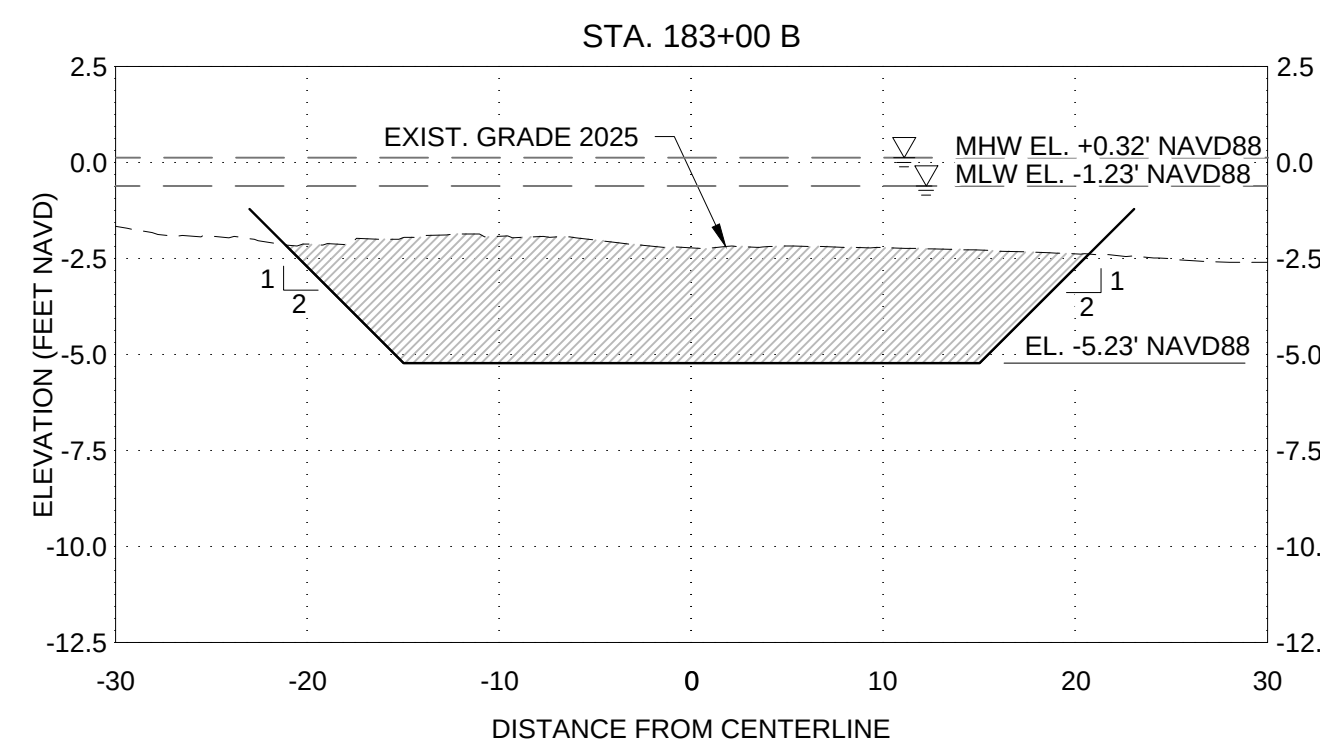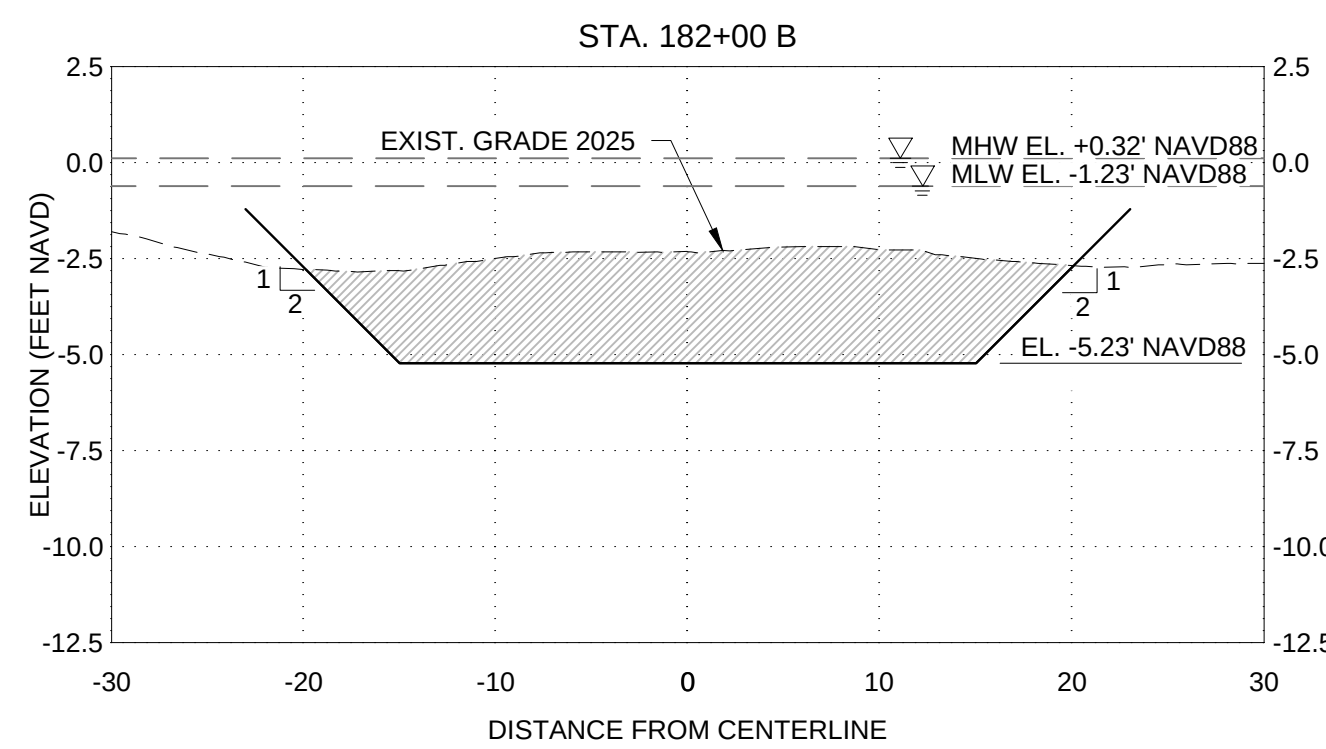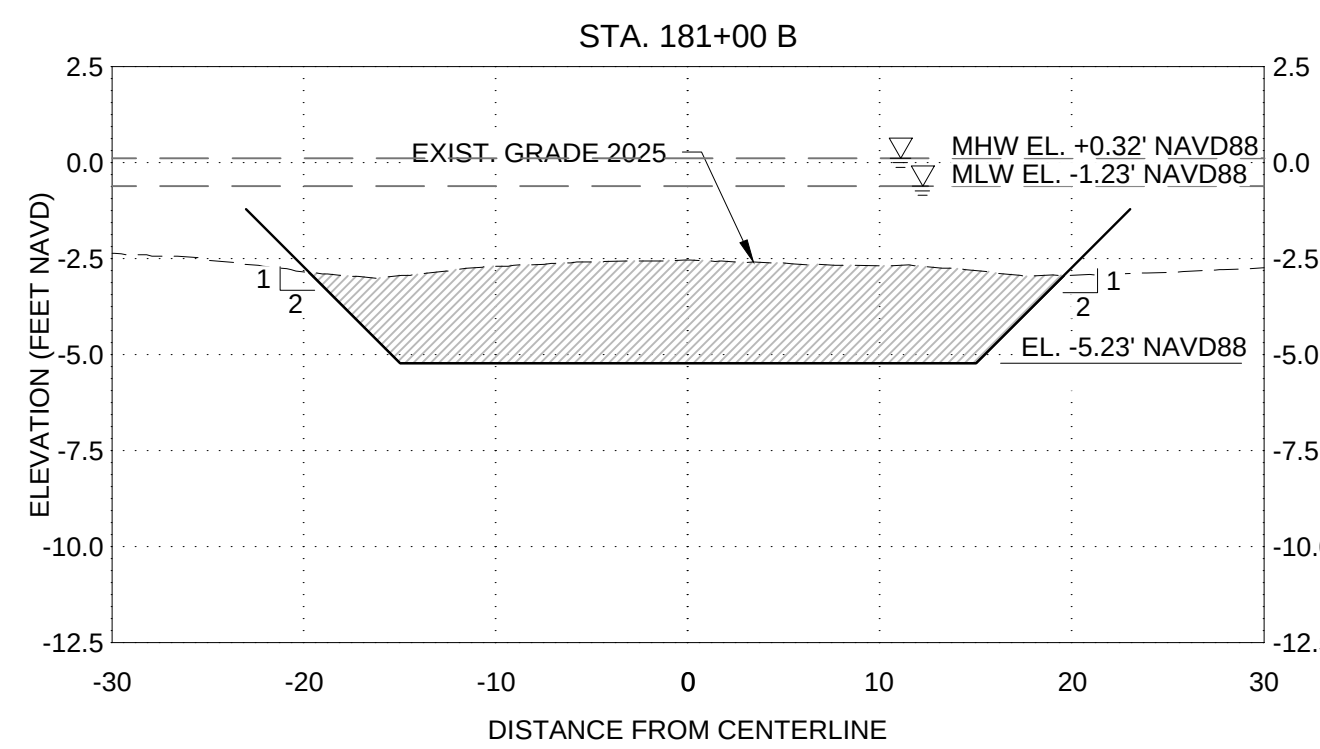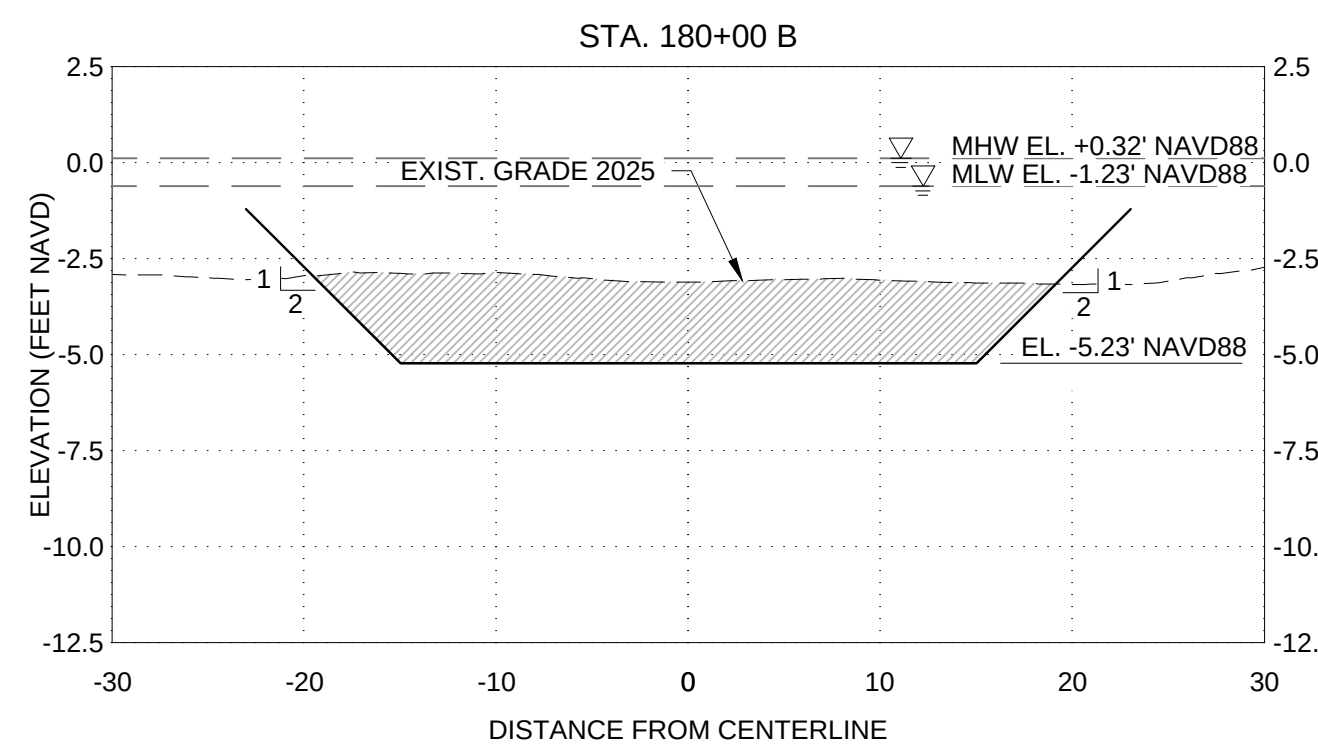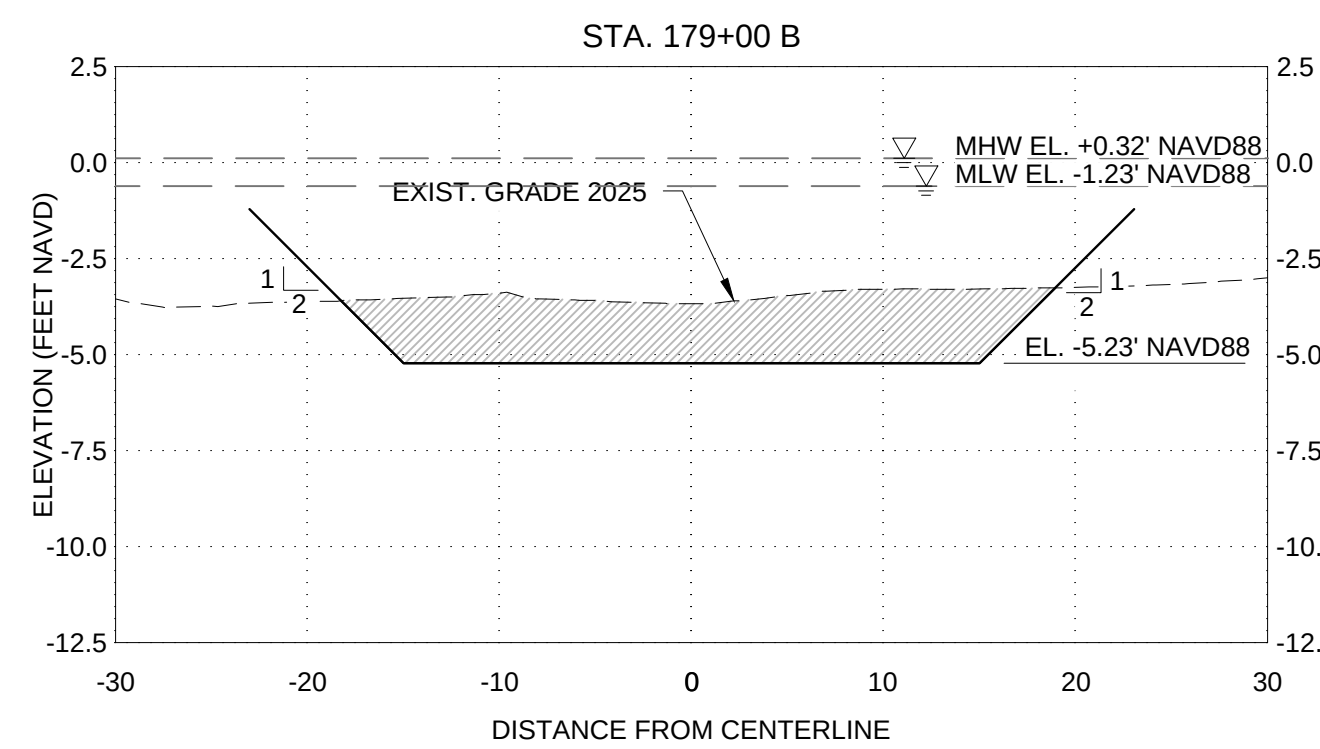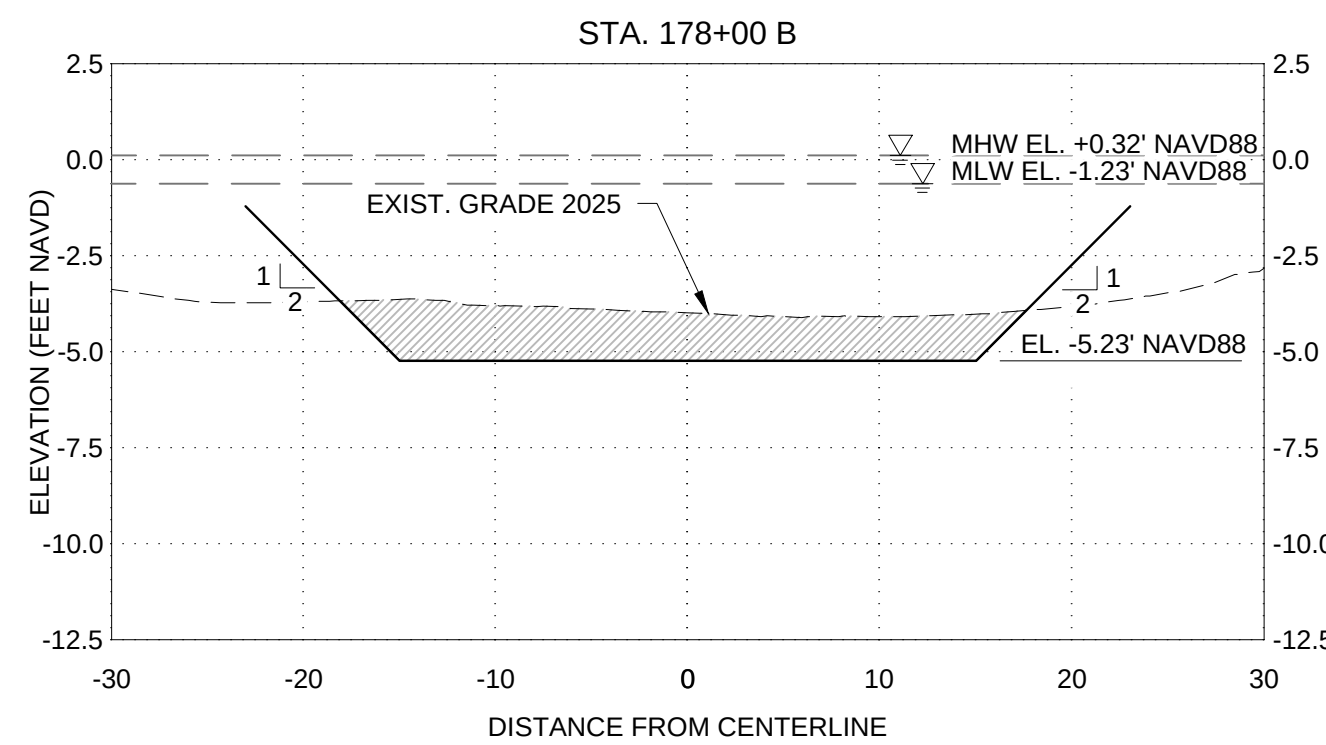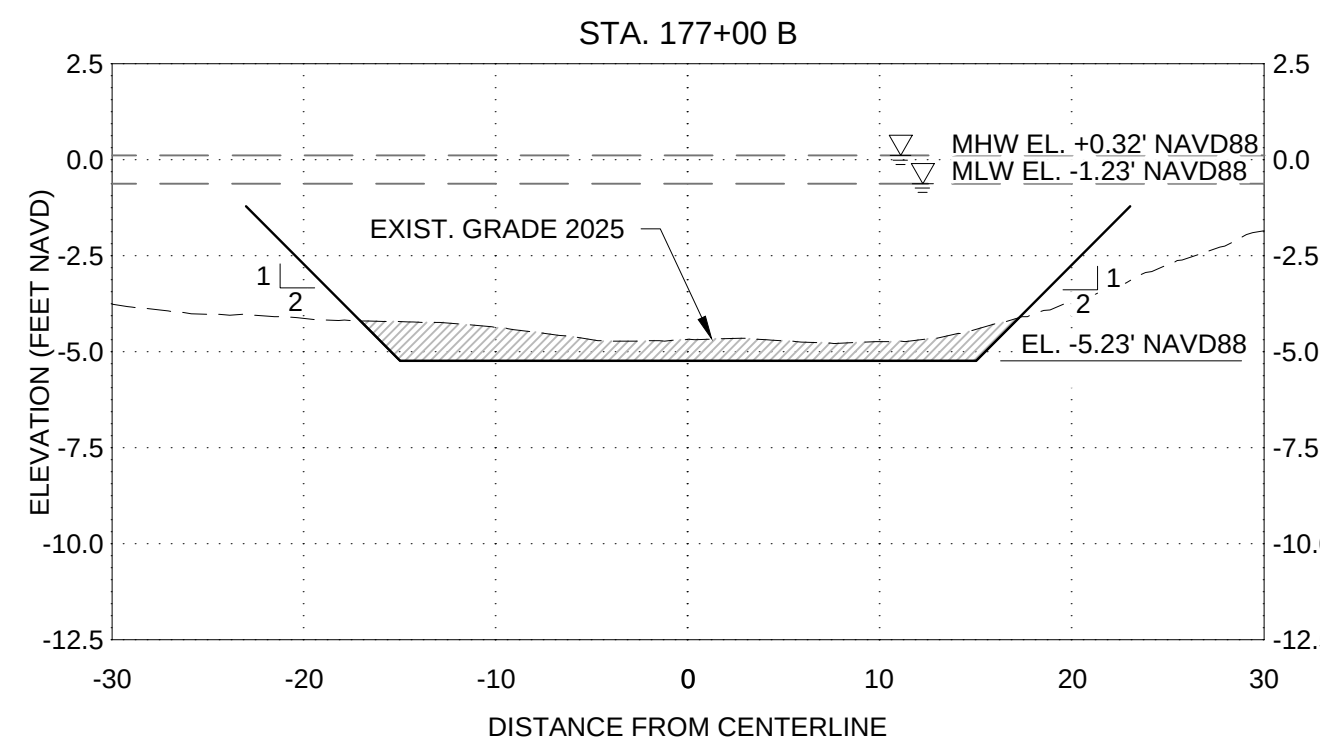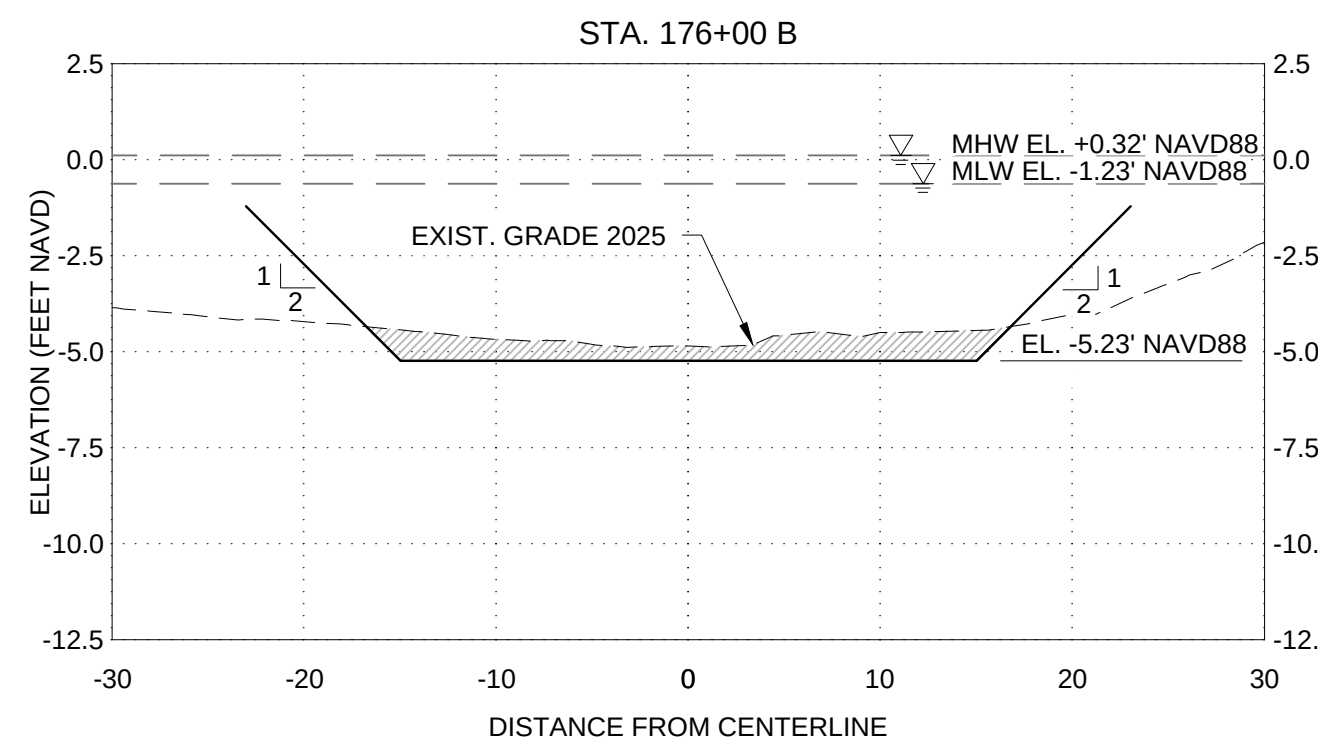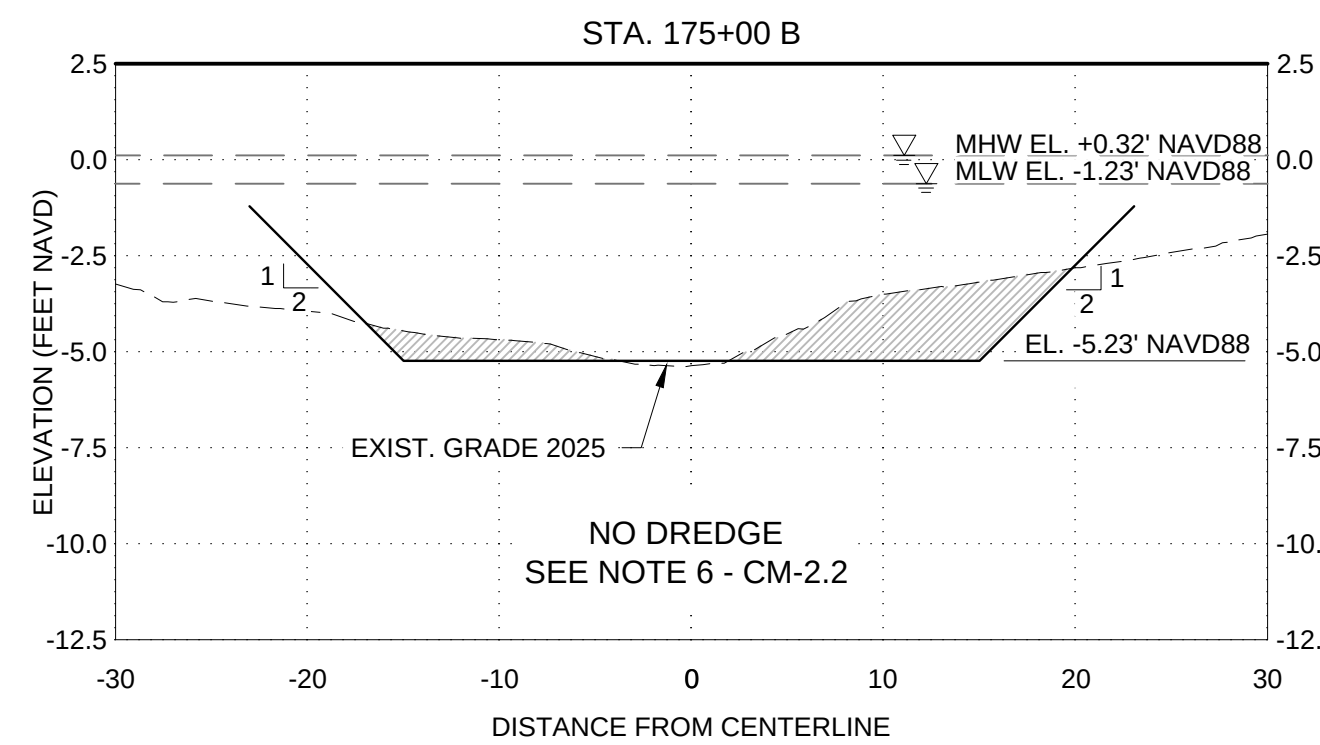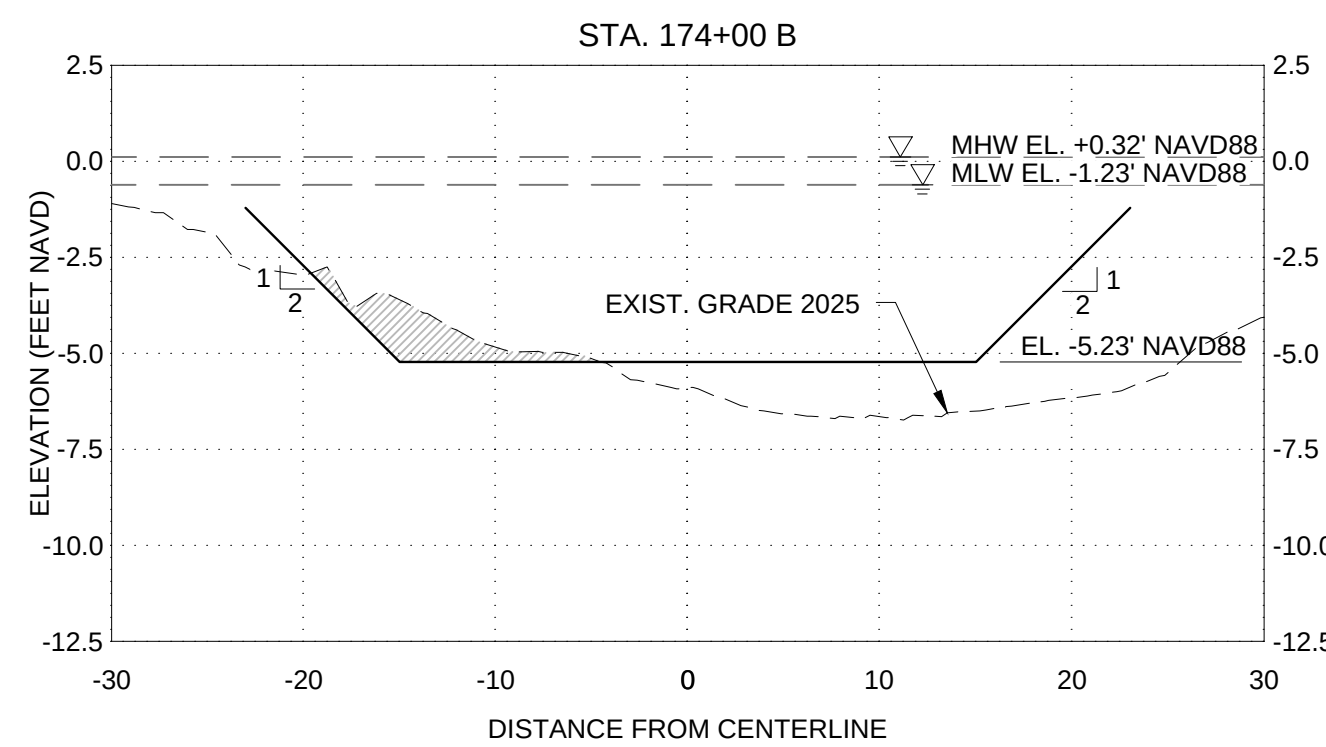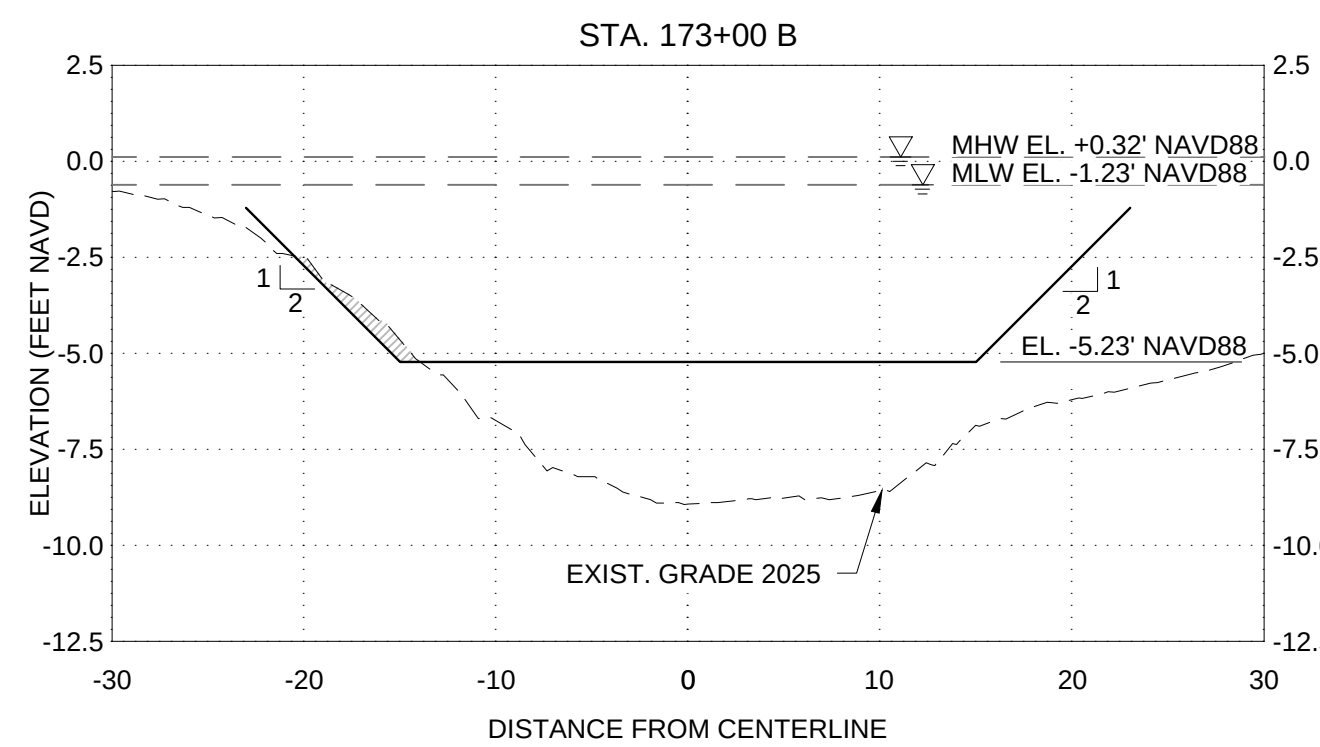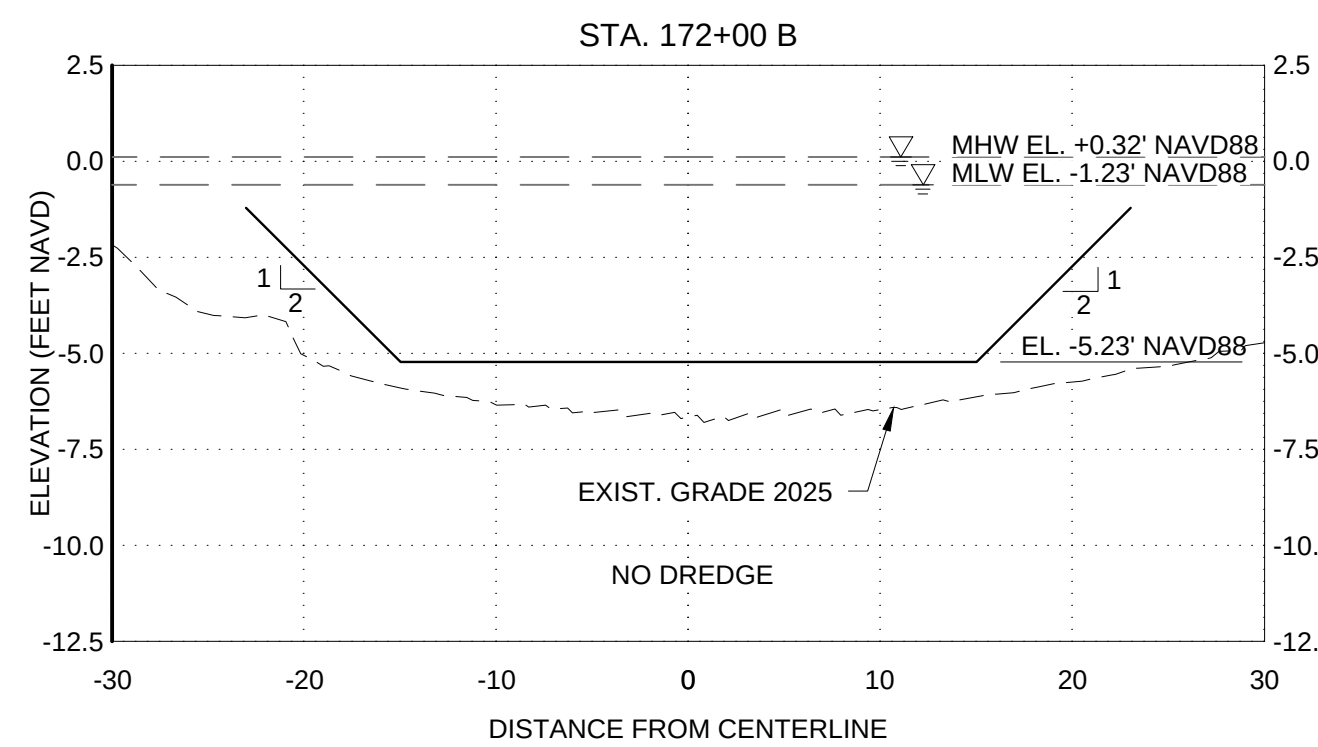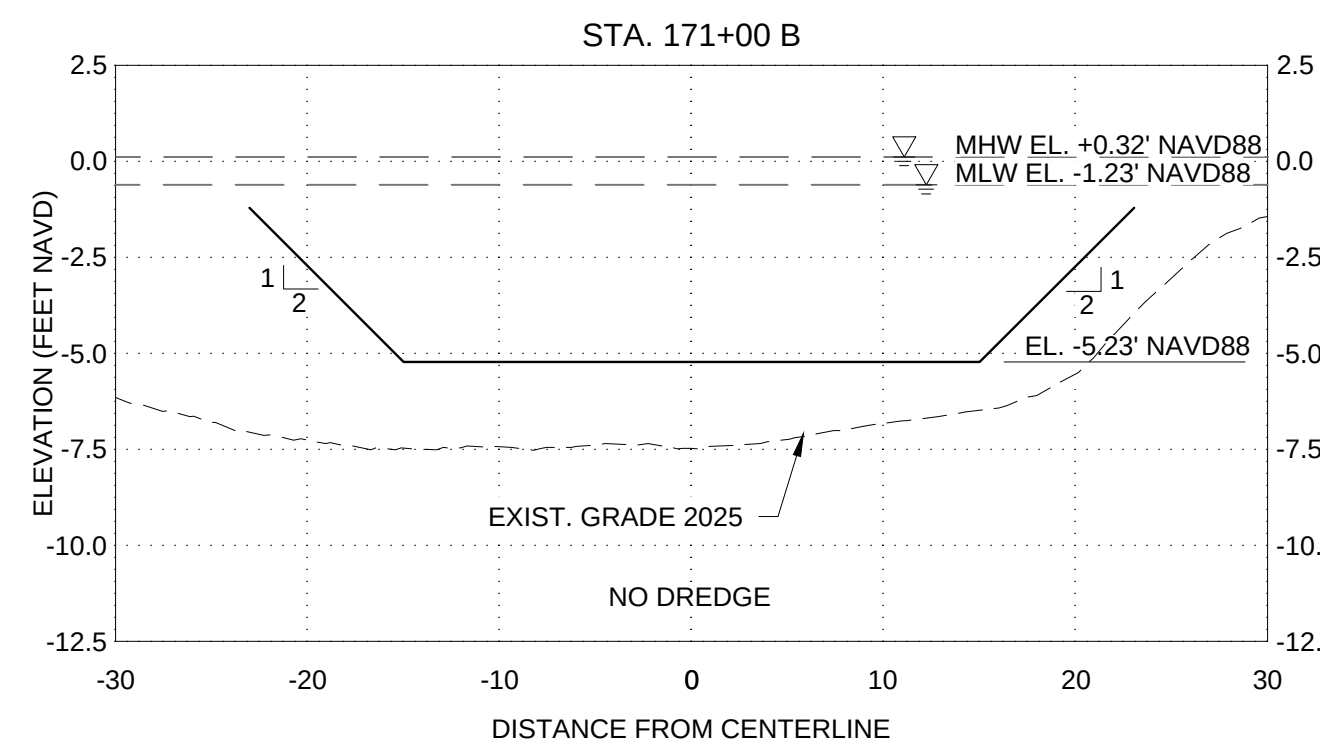

NOTE:
AREA SHOWN WITH SHOALING ARE BSAED ON THE DESIGN SURVEY
COMPLTED BY SURVTECH SOLUTIONS DATED JANUARY 2025. THE
CONTRACTOR SHALL CONDUCT A PRE-DREDGE SURVEY TO DETERMINE
ACTUAL AREAS REQUIRING DREDGING.

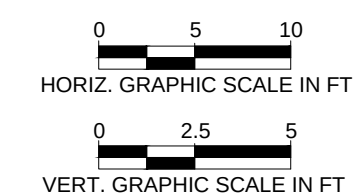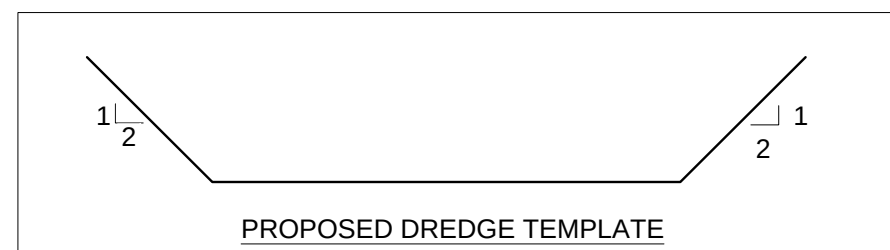

PROJECT:
PHILLIPPI CREEK
MAINTENANCE
DREDGING PROJECT

ADDRESS:

SARASOTA, FL

CLIENT:



ADDRESS:
200 E. MIAMI AVE.
VENICE, FL 34285

ENGINEER

CUMMINS CEDERBERG
COASTAL & MARINE ENGINEERING
201 ALHAMBRA CIRCLE, SUITE 601
CORAL GABLES, FL 33134
TEL: +1 305 741-6155 FAX: +1 305-974-1969
WWW.CUMMINSCEDERBERG.COM
COA # 29062

CUMMINS | CEDERBERG
Coastal & Marine Engineering

PROJECT SPONSOR:



SARASOTA COUNTY PLANNING AND
DEVELOPMENT SERVICES,
ENVIRONMENTAL PROTECTION DIVISION
1001 SARASOTA CENTER BLVD
SARASOTA, FL 34240

SEAL:


[illegible]

CC PROJECT NO:	137125
DRAWN	GK
CHECKED	KF/JB
SCALE	REFERS TO 22X34 SHEET



SHEET TITLE

CROSS SECTIONS
(12 OF 13)

CM-2.14

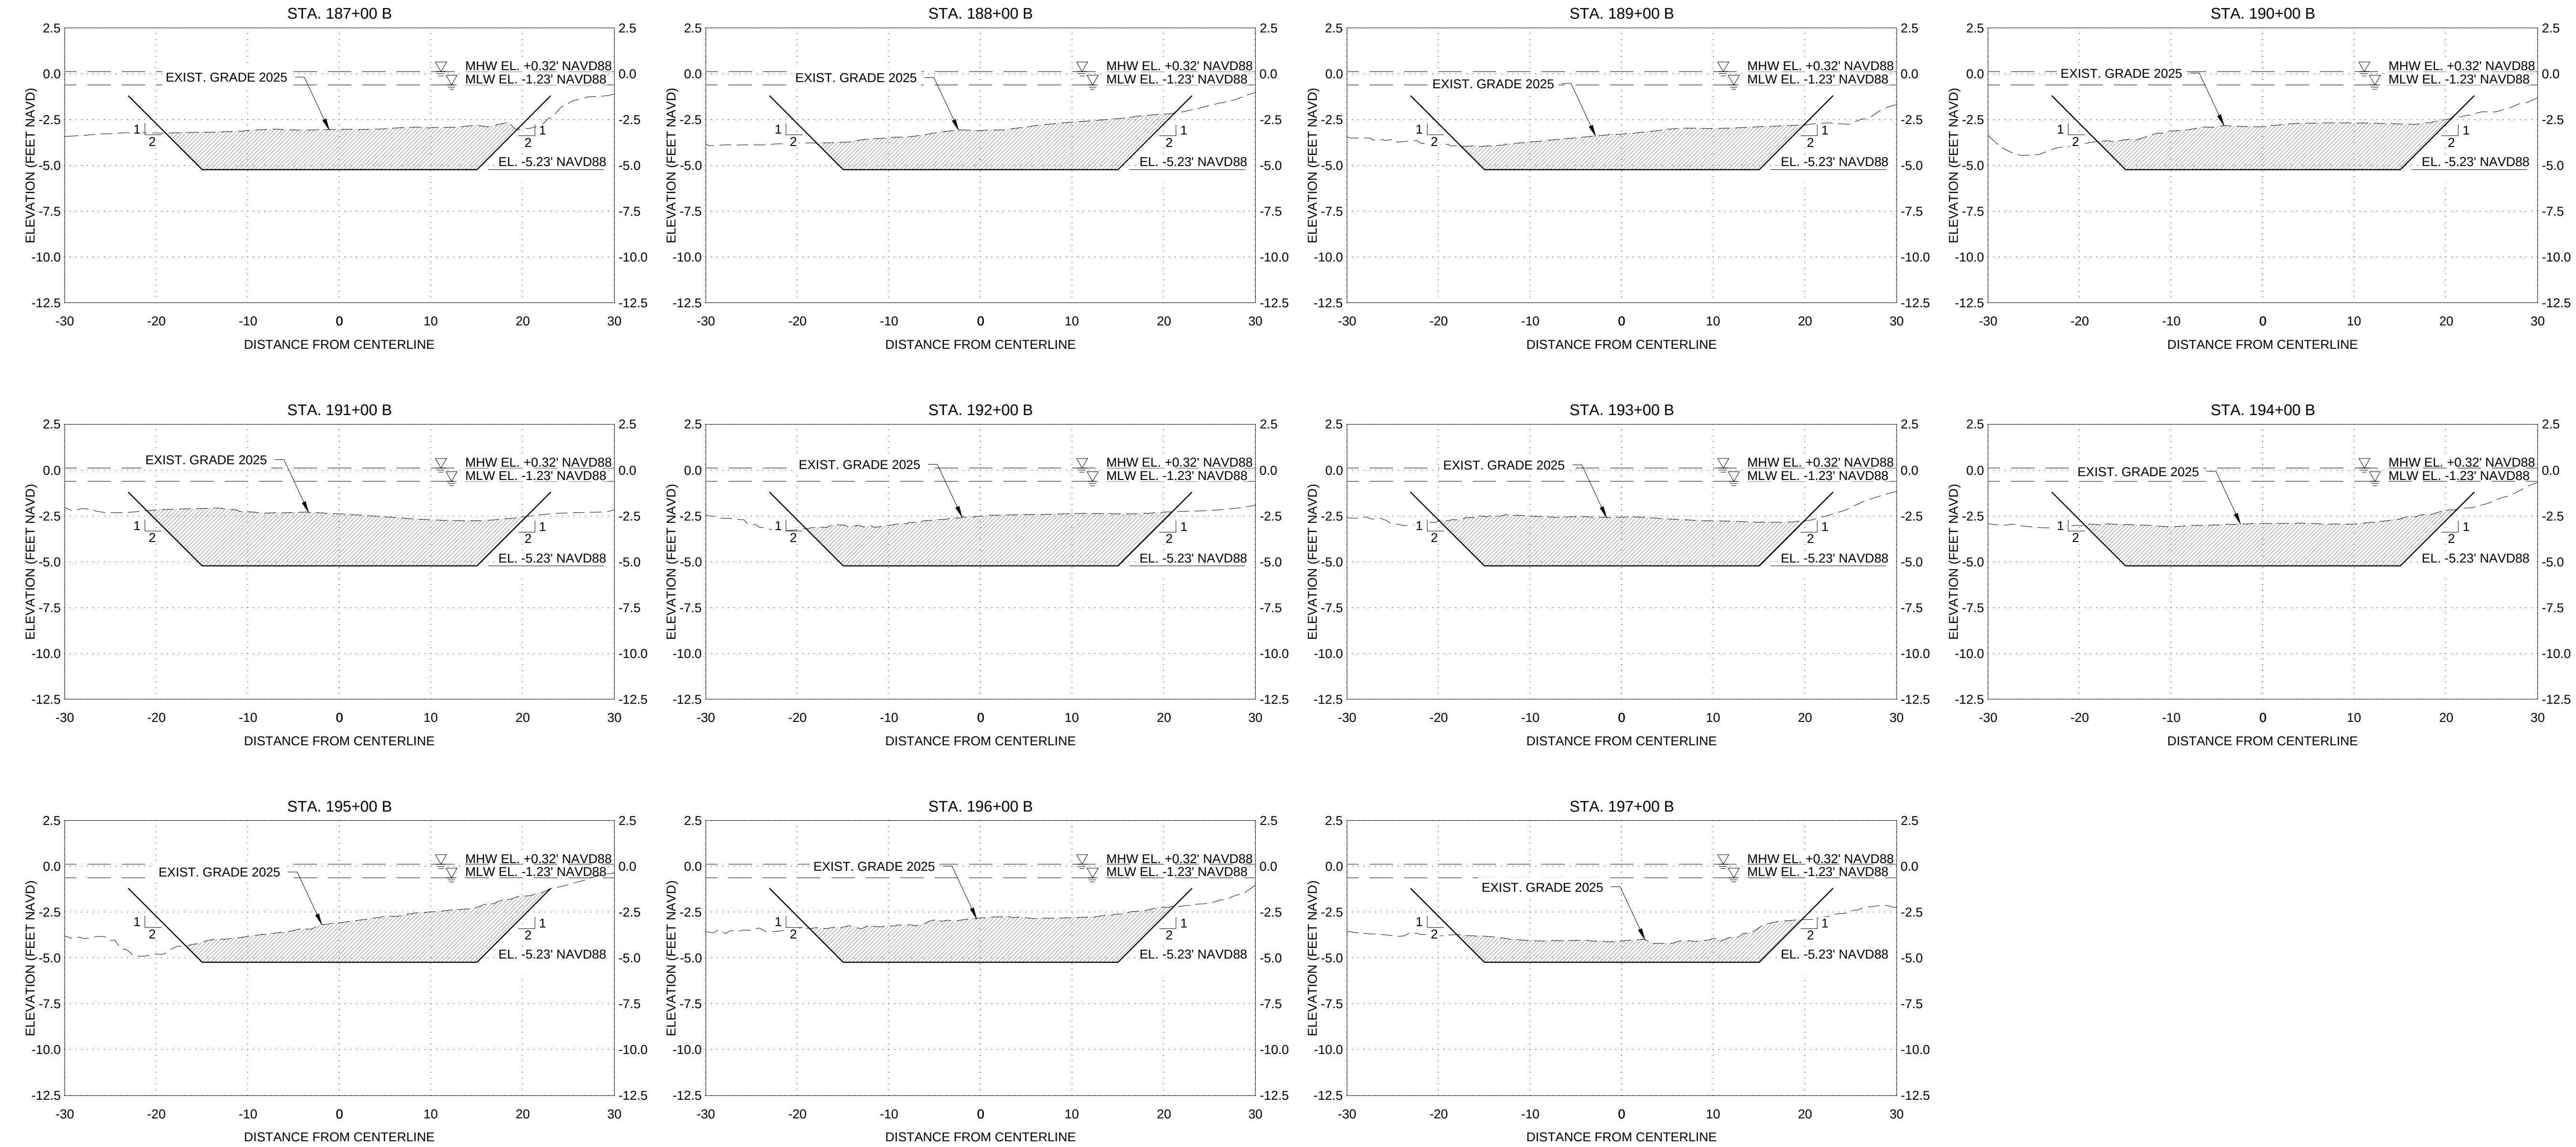

NOTE:
AREA SHOWN WITH SHOALING ARE BSAED ON THE DESIGN SURVEY
COMPLTED BY SURVTECH SOLUTIONS DATED JANUARY 2025. THE
CONTRACTOR SHALL CONDUCT A PRE-DREDGE SURVEY TO DETERMINE
ACTUAL AREAS REQUIRING DREDGING.

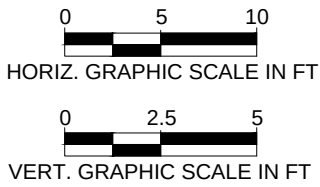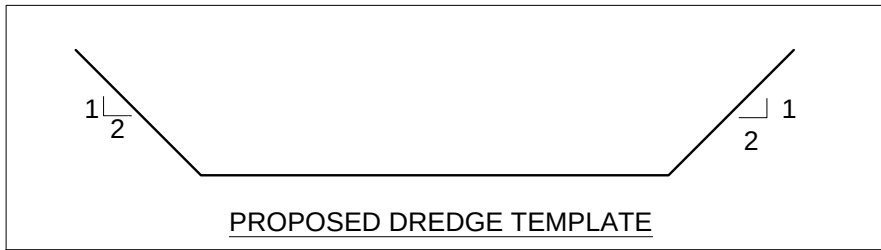

PROJECT:
PHILLIPPI CREEK
MAINTENANCE
DREDGING PROJECT

ADDRESS:

SARASOTA, FL

CLIENT:



ADDRESS:

200 E. MIAMI AVE.

VENICE, FL 34285

ENGINEER:

CUMMINS CEDERBERG
COASTAL & MARINE ENGINEERING

201 ALHAMBRA CIRCLE, SUITE 601
CORAL GABLES, FL 33134
TEL: +1 305 741-6155 FAX: +1 305-974-1969
WWW.CUMMINSCEDERBERG.COM
COA # 29062

CUMMINS | CEDERBERG
Coastal & Marine Engineering

PROJECT SPONSOR:



SARASOTA COUNTY PLANNING AND
DEVELOPMENT SERVICES,
ENVIRONMENTAL PROTECTION DIVISION
1001 SARASOTA CENTER BLVD
SARASOTA, FL 34240

SEAL:

										CONSTRUCTION DRAWINGS
										SUBMISSION / REVISION
										DATE
									1	ISSUE

CC PROJECT NO:	137125
DRAWN	GK
CHECKED	KF/JB
SCALE	REFERS TO 22X34 SHEET

SHEET TITLE

CROSS SECTIONS
(13 OF 13)


CM-2.15

CM-2.17



NOTES:

1. AERIAL PHOTOGRAPH IS FROM ESRI WORLD IMAGERY SERVICES DATED 02/25/2023. FOR REFERENCE PURPOSES ONLY.

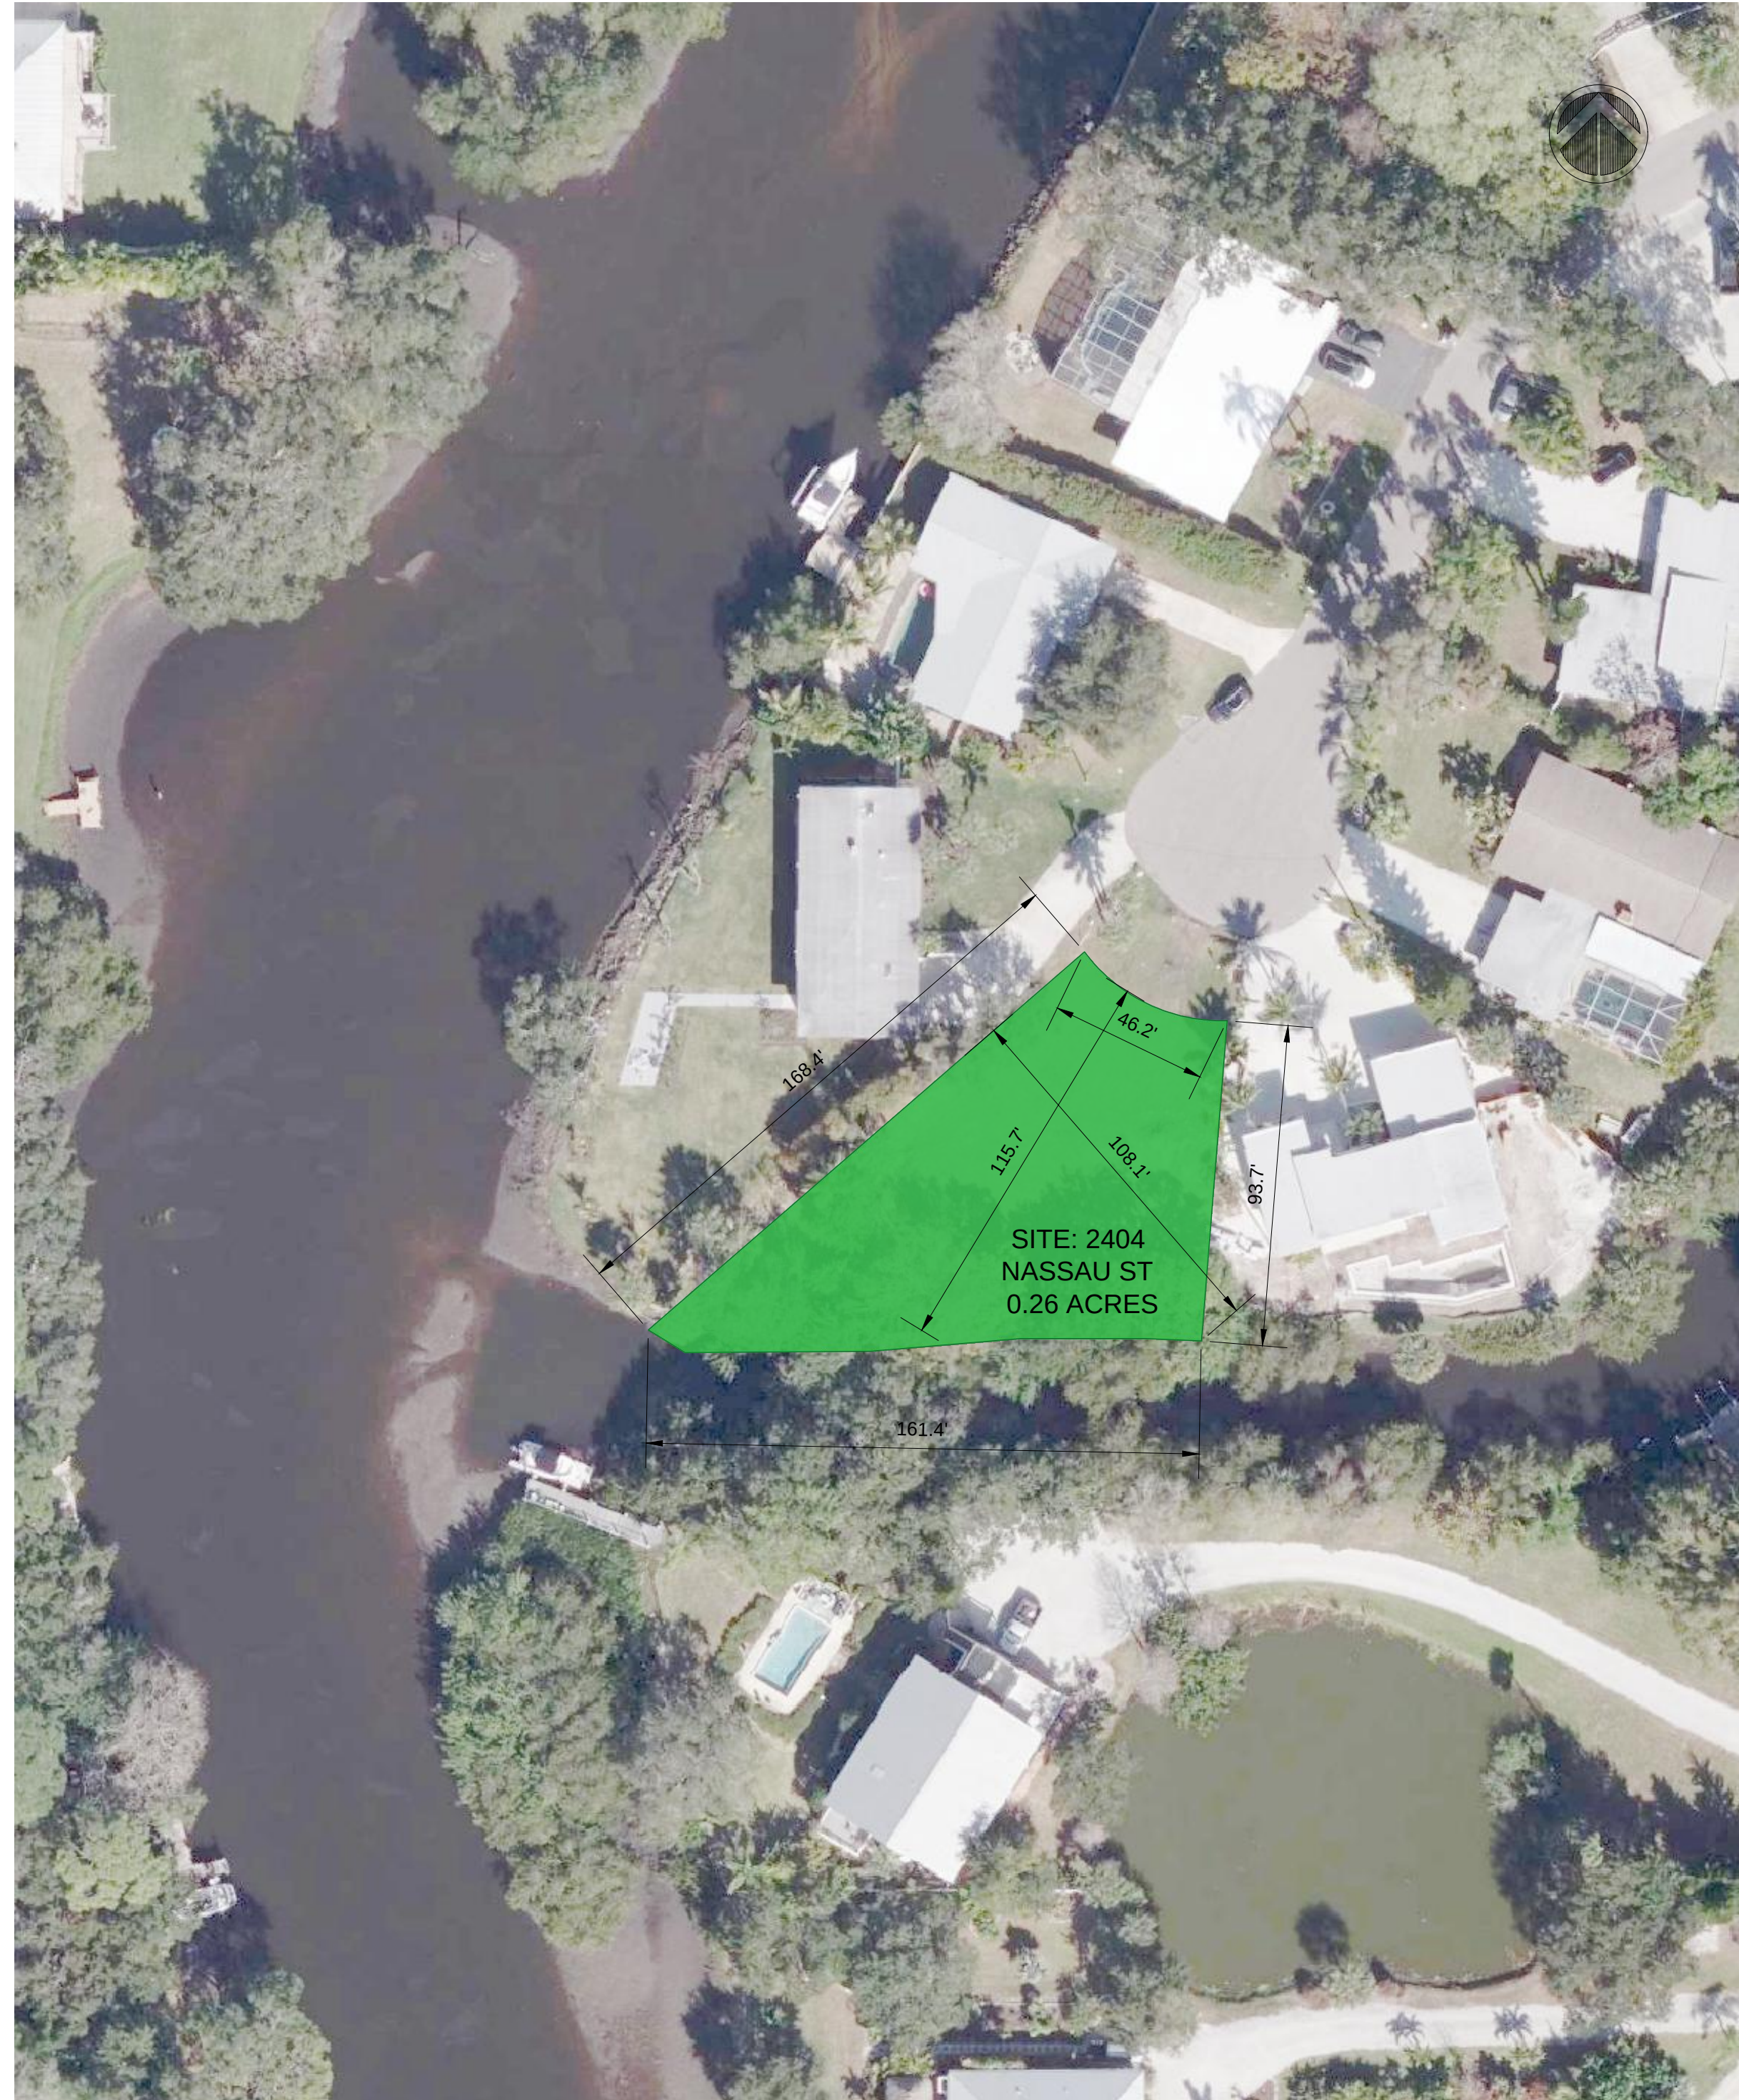

POTENTIAL COUNTY OWNED DMMA SITE



NOTES:

1. AERIAL PHOTOGRAPH IS FROM ESRI WORLD IMAGERY SERVICES DATED 02/25/2023. FOR REFERENCE PURPOSES ONLY.



POTENTIAL COUNTY OWNED DMMA SITE



PROJECT:
PHILLIPPI CREEK
MAINTENANCE
DREDGING PROJECT

ADDRESS:

SARASOTA, FL

CLIENT:



ADDRESS:
200 E. MIAMI AVE.
VENICE, FL 34285

ENGINEER:

CUMMINS CEDERBERG
COASTAL & MARINE ENGINEERING
201 ALHAMBRA CIRCLE, SUITE 601
CORAL GABLES, FL 33134
TEL: +1 305 741-6155 FAX: +1 305-974-1969
WWW.CUMMINSCEDERBERG.COM
COA # 29062

CUMMINS | CEDERBERG
Coastal & Marine Engineering

PROJECT SPONSOR:



SARASOTA COUNTY PLANNING AND
DEVELOPMENT SERVICES,
ENVIRONMENTAL PROTECTION DIVISION
1001 SARASOTA CENTER BLVD
SARASOTA, FL 34240

SEAL:

[illegible]

CC PROJECT NO:	137125
----------------	--------

DRAWN	GK
-------	----

CHECKED	KF/JB
---------	-------

SCALE	REFERS TO 22X34 SHEET
-------	-----------------------

SHEET TITLE

POTENTIAL COUNTY OWNED DMMA SITES

CM-2.18

